


# MTVF2.4X0915IR-BCDN-MD

Type	AI VARI		Mount	ø14 Straight Mount		
Focal Length	9.0~22.0mm		Back Focus	6.7~14.2mm		
Fno.	F1.5		Flange Back	13.8mm		
Designed Image Format	1/3"(4.8x3.6mm)		Exit Pupil	-40.8 ~ -25.6mm		
Operation Range	Iris	F1.5-F360	Filter Size	-		
	Focus	0.50m~∞	Aperture	Front	ø 8.2mm	
Zoom	9.0~22.0mm	Rear		ø 7.1mm		
Control	Iris	DC Galvanometer	Dimension	ø29.2 x 40.2mm		
	Focus	Mortorized		Weight	27.1g	
	Zoom	Mortorized				
Object Size at MOD	Wide	207.6x284.8mm				
	Tele	88.4x118.2mm				
Field of View	D	39.0°~16.2°	1/4"	28.6°~12.2°		
	H	30.6°~13.0°		22.6°~9.8°		
	V	22.6°~9.8°		16.8°~7.2°		
Control	Iris	Focus	Zoom			
Motor type	Galvanometer	PM type stepping motor	PM type stepping motor			
Driving Coil/Supply Volt.	190Ω	-	-			
Damping Coil/Current	465Ω	-	-			
IR cut filter	3.0V ~ 5.0V	-	-			
Operation voltage		2.8V ~ 3.6V	2.8V ~ 3.6V			
Coil resistance		28.5Ω/phase ±7%	28.5Ω/phase ±7%			
Excite driving method		1-2phase Bipolar Constant voltage	1-2phase Bipolar Constant voltage			
Reduction ratio		1/131.574	1/131.574			
Step angle		0.171°	0.171°			
Insulation resistance		1MΩ or more	1MΩ or more			
Light Measuring Method		-	-			
Input Signal		-	-			
Iris Accuracy		-	-			
Sensitivity Adjustment		-	-			
Operating Temperature		-10 ~ +50 degree C				


## DIMENSIONS

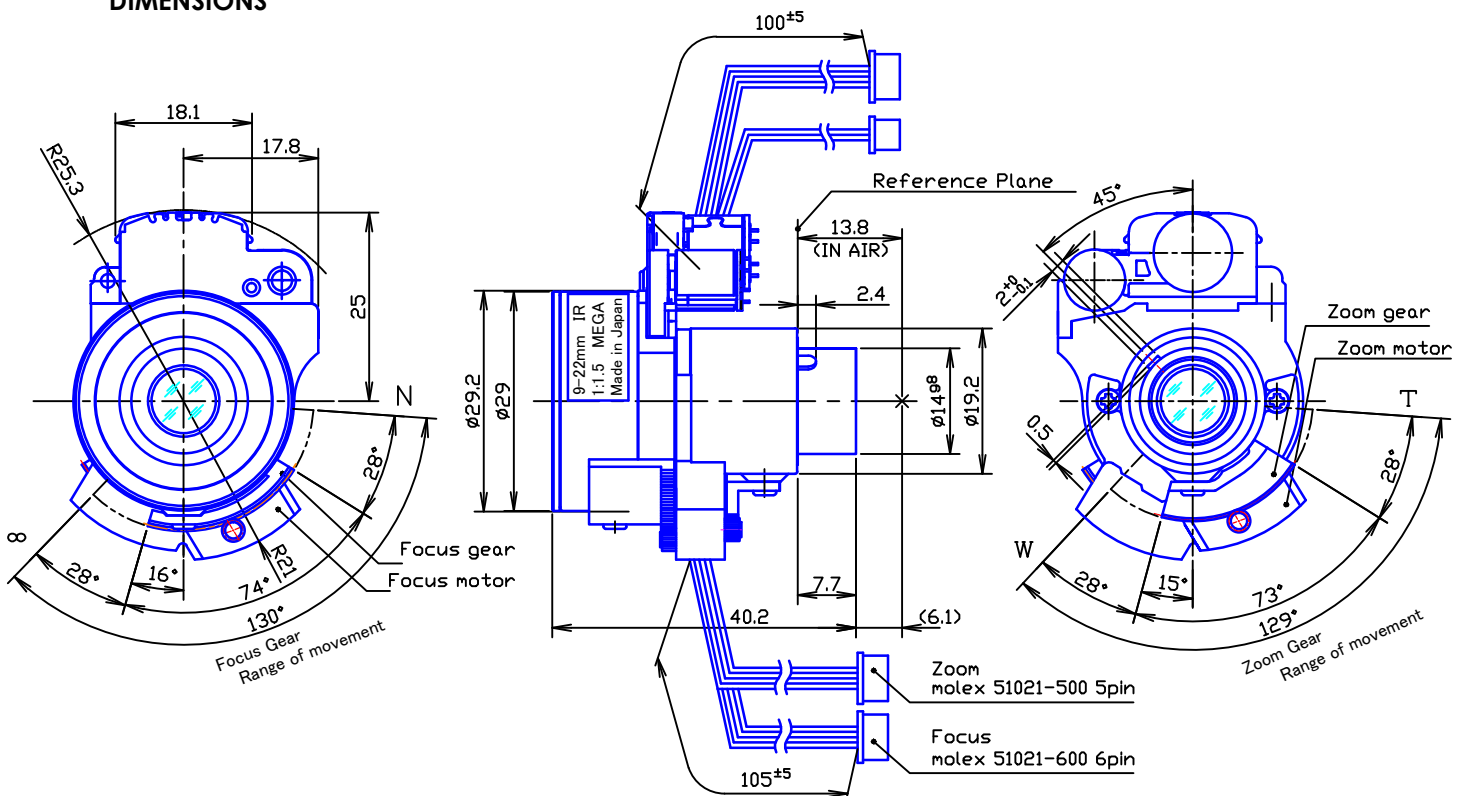

# MTVF2.4X0915IR-BCDN-MD

## CONNECTION & CONTROL


### (1) Auto Iris terminal

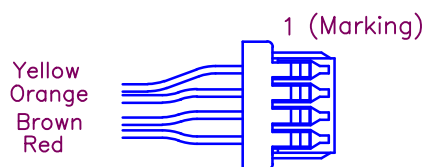

51021-0400

Pin number	Color	Assignment
1	Yellow	Dump +
2	Orange	Dump -
3	Brown	Drive +
4	Red	Drive -


### (2) IR Cut Filter Control terminal

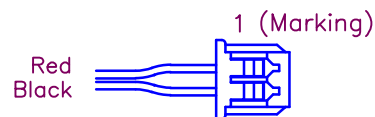

51021-0200

Pin number	Color	Assignment
1	Red	IR IN/OUT(+/-)
2	Black	IR GND


### (3) Zoom Motor Control terminal

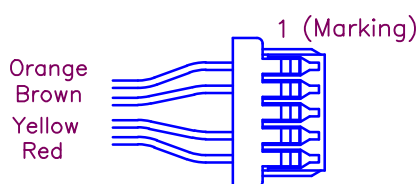

51021-0500

Pin number	Color	Assignment
1	Orange	B
2	Brown	A
3	N/A	N/A
4	Yellow	<u>B</u>
5	Red	<u>A</u>

### (4) Focus Motor Control terminal

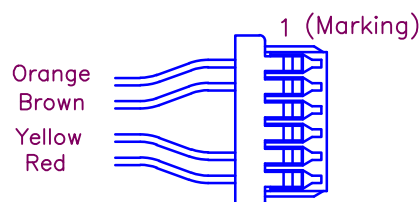

51021-0600

Pin number	Color	Assignment
1	Orange	B
2	Brown	A
3	N/A	N/A
4	N/A	N/A
5	Yellow	<u>B</u>
6	Red	<u>A</u>

### (5) Zoom/Focus Motor Control Excitation pattern



Excite Pattern of CW revolution				
Step	A	<u>A</u>	B	<u>B</u>
0	H	L	H	L
1	L	L	H	L
2	L	H	H	L
3	L	H	L	L
4	L	H	L	H
5	L	L	L	H
6	H	L	L	H
7	H	L	L	L