

EL067

Expandable Diffuse Linear Dome

- Aii** 12" wide linear diffuse light for use with highly reflective materials
- Aii** Available in 6" increments; Lengths from 6" to 36"
- Aii** Can be built with up to 4 camera view holes



Ordering Information

All Products Built To Order:
Shipped Within 5 - 6 Weeks

Length (in inches)	View Port	Spectral wavelength	Optional power Compatibility	Alternative Connector
EL067 XX	X	XXX	XX	XXX
06	A - 1 hole (centered)	(uv) 395	IC ⁺	M12* (male)
12	B - 2 holes	(blue) 470	C3	
18	C - 3 holes	(green) 520	C5	
24	D - 4 holes	(red) 625	24	
30		(infra-red) 850		
36		(white) WHI		

MAXIMUM # OF VIEW PORTS:	
6"	2
12"	3
18" - 36"	4

Effective Working Range:
12-50mm (.5"-2")

+ ICS available up to 12" max

IC = iCS (requires 24v power supply)

C3 = Pulsar 710 Connector


C5 = Pulsar 320 Connector

* Available with IC and 24v options only

Dimensional Information

[Click for Installation
Models & Drawings](#)

PART #	LENGTH	MAX. # VIEW PORTS
EL06706	165.1 (6.5)	2
EL06712	317.5 (12.50)	3
EL06718	469.9 (18.50)	4
EL06724	622.3 (24.50)	4
EL06730	774.7 (30.50)	4
EL06736	927.1 (36.50)	4

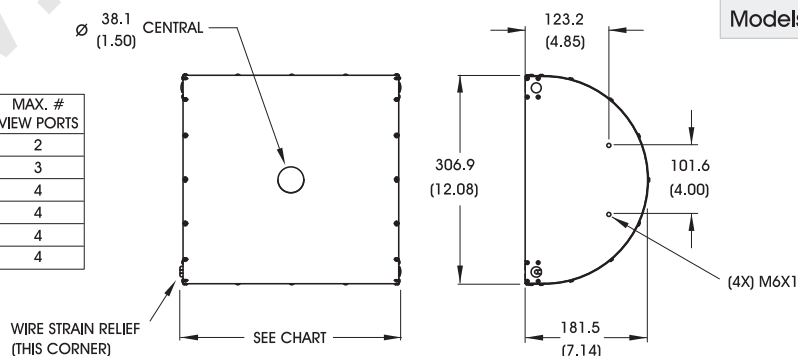

Cable Length: 1.5 Meter (59")

DIMENSIONS ARE IN MILLIMETERS (INCHES)

Standard Variation Current Specifications (Per 6" Segment)

uv	blue	green	red	infra-red	white	
12W	12W	12W	9W	8W	12W	@24

Standard Product Information

Finish: Black Anodized

Operating Temperature: 0-60° C

Meets Specifications: CE, RoHS

LED products provide a lifespan significantly greater than other v

advancedillumination.com

For design help, accessories or pricing, please contact:
sales@avsupply or call: 1-858-565-1101

AUDIOVIDEO SUPPLY
1-800-284-2288 sales@avsupply.com
www.avsupply.com