

# **RL2115**

## Dark Field Ring Light

- Produces classic dark field effects.
- Designed for inspecting small objects.



#### Ordering Information

Standard Product: Shipped Next Day

Standard Product Variation: Shipped Within Two Weeks

### RL2115-660C2

Configured for use with Ai **Power Supply** 

### Optimal working distance:

12.7mm (.5") up to 25.4mm (1")

Optional power Compatibility Spectral Alternative wavelenath Connector XXX XX XXX RL2115 (UV) 395<sup>♦</sup> IC M12\* (IS: 5-pin male; (blue) 470 IS IC/24: 4-pin male) (green) 520 C2 (yellow) 590 C3 (orange) 625 24 (red) 660 (infra-red) 880

(white) WHI

IC = iCS (requires 24v power supply)

IS = ISU (24 volt PS required.)


C2 = Ai Connector

C5 = Pulsar 320 Connector

\* Available with IC, IS, and 24v options only

<sup>()</sup> UV LEDs have a considerably shorter half-life than other LEDs (<1000hrs). For this reason Ai recommends these LEDs be used in strobe mode only. For applications requiring continuous 24v power, contact Ai for assistance.

#### **Dimensional Information**

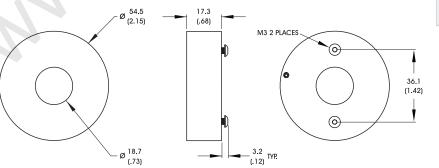

Click for Installation Models & Drawings

Cable Length: 1.5 Meter (59")

Standard Variation Current Specifications

red orange @24 60 60 60 60 90 100 60 mΑ

## Standard Product Information

Finish: **Black Anodized** Operating Temperature: 0-60° C CE, RoHS Meets Specifications:

LED products provide a lifespan signifcantly

greater than other v

#### advancedillumination.com

For design help, accessories or pricing, please contact: sales@avsupply or call: 1-858-565-1101

1-800-284-2288 sales@avsupply.com www.avsupply.com