



Distributed By: Audio Video Supply -- Tel: 1-800-284-2288 -- www.avsupply.com

SL162

Ultra Bright™ Coaxial Spot Light



- 4i Designed to replace fiber optic light sources in coaxial microscopes - 1,030,000 Lux @ 700mA
- 4i Compact light head provides efficient thermal management to promote long LED life.
- 4i Optional Couplers available for use with Dolan-Jenner, Fostec, and Moritex fiber bundles - see the CP112 page in Accessories

Ordering Information

Standard Product:
Shipped Next Day

SL162-WHI24

Configured for use with user
supplied 24v power source

Standard Product Variation:
Shipped Within Two Weeks

SL162 - **XXX** **XX** **XXX**
(white) WHI IC IS C5 24**
Spectral wavelength
Optional power compatibility
Alternative Connector
M12*
(IS: 5-pin male;
IC/24: 4-pin male)

White	Max. Illumination	Power	Illuminance (Lux)
	@ Surface	350mA	550,000
		700mA	1,030,000
	Lifetime	50,000 hrs	

** 24v is built with driver which features:
• 0 - 10v remote control
• PWM compatible


IC = iCS (requires 24v power supply)

IS = ISU (24 volt PS required.)

C5 = Pulsar 320 Connector

* Available with IC, IS, and 24v options only

Dimensional Information

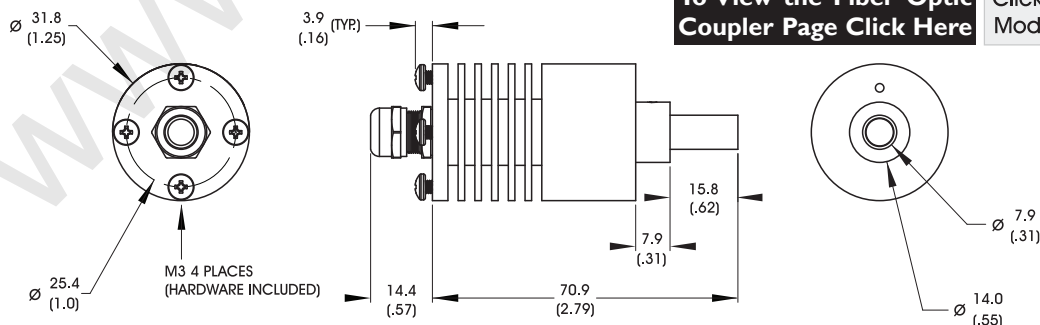

To View the Fiber Optic
Coupler Page Click Here

Click for Installation
Models & Drawings

Cable Length: 1.5 Meter (59")

DIMENSIONS ARE IN MILLIMETERS (INCHES)

Standard Variation Power Specifications

@24	white	400	mA
iCS		400	mA

Standard Product Information

Weight: 86.2 g (3.0 oz)
Finish: Black Anodized
Operating Temperature: 0-60° C
Meets Specifications: CE, RoHS
LED products provide a lifespan significantly
greater than other vi

advancedillumination.com

For design help, accessories or pricing, please contact:
sales@avsupply or call: 1-858-565-1101

AUDIOVIDEO SUPPLY
1-800-284-2288 sales@avsupply.com
www.avsupply.com