

SLI64 Ultra Bright™ Compact Spot Light

- Aii** 45,000 Lux @ 6" and 700mA
- Aii** IP65 Compliant Design
- Aii** Compact light head provides efficient thermal management to promote long LED life



Ordering Information

Stock Product: Shipped Next Day

Standard Product Variation: Shipped Within Two Weeks

SLI64-WHI24

Configured for use with user supplied 24v power source

Effective Working Range:
75-600mm (3"-24")

SLI64 - **XXX** **XX** **XXX**
(white) WHI IC i3 C5 24 **
Spectral wavelength
Optional power Compatibility
Alternative Connector
M12*
(i3: 5-pin male; IC/24: 4-pin male)

White	Max. Illumination	Power	Illuminance (Lux)
	@ 6"	350mA	24,000
		700mA	45,000
	@ 12"	350mA	6,000
		700mA	12,000

** 24v is built with driver which features:

- 0 - 10v remote control
- PWM compatible

IC = iCS (requires 24v power supply)


i3 = Combined continuous-on and strobe over-drive (24 volt PS required.)

C5 = Pulsar 320 Connector

* Available with IC, i3, and 24v options only

Dimensional Information

[Click for Installation Models & Drawings](#)

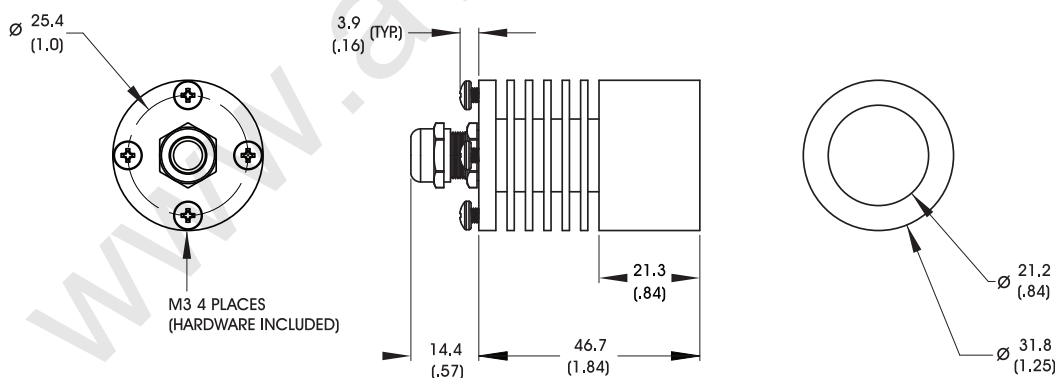

STANDARD CABLE LENGTH: 1.5 Meter (59")

DIMENSIONS ARE IN MILLIMETERS (INCHES)

Standard Variation Power Specifications

white
@24 400 mA

General Specifications

Weight: 81.6 g (2.9 oz)
Finish: Black Anodized

Operating Temperature: 0-60 C°
Meets Specifications:

advancedillumination.com

For design help, accessories or pricing, please contact:
sales@avsupply or call: 1-858-565-1101