

- Aii** Large format useful with high speed cameras
- Aii** Very high intensity, uniform light for long working distance and large field-of-view
- Aii** Strobe or continuous-on drive capability
- Aii** Rugged industrial housing with optimized passive thermal management
- Aii** More efficient and stable than common flood lights




**Ordering Information**

**Stock Product:** Shipped Next Day

**Standard Product Variation:** Shipped Within Two Weeks


**SLI85-WHIIC**

Configured with inline current source

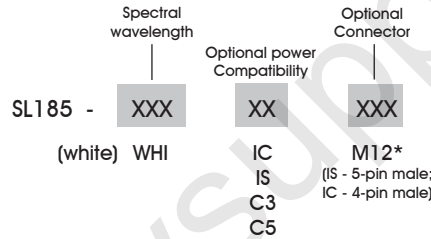


IC = iCS (requires 24v power supply)  
 IS = ISU (24 volt PS required.)  
 C3 = Pulsar 710 Connector  
 C5 = Pulsar 320 Connector  
 \* Available with IC and IS options only

**Intensity Distribution with Irradiance (mW/cm<sup>2</sup>) & Illuminance (Lux)**

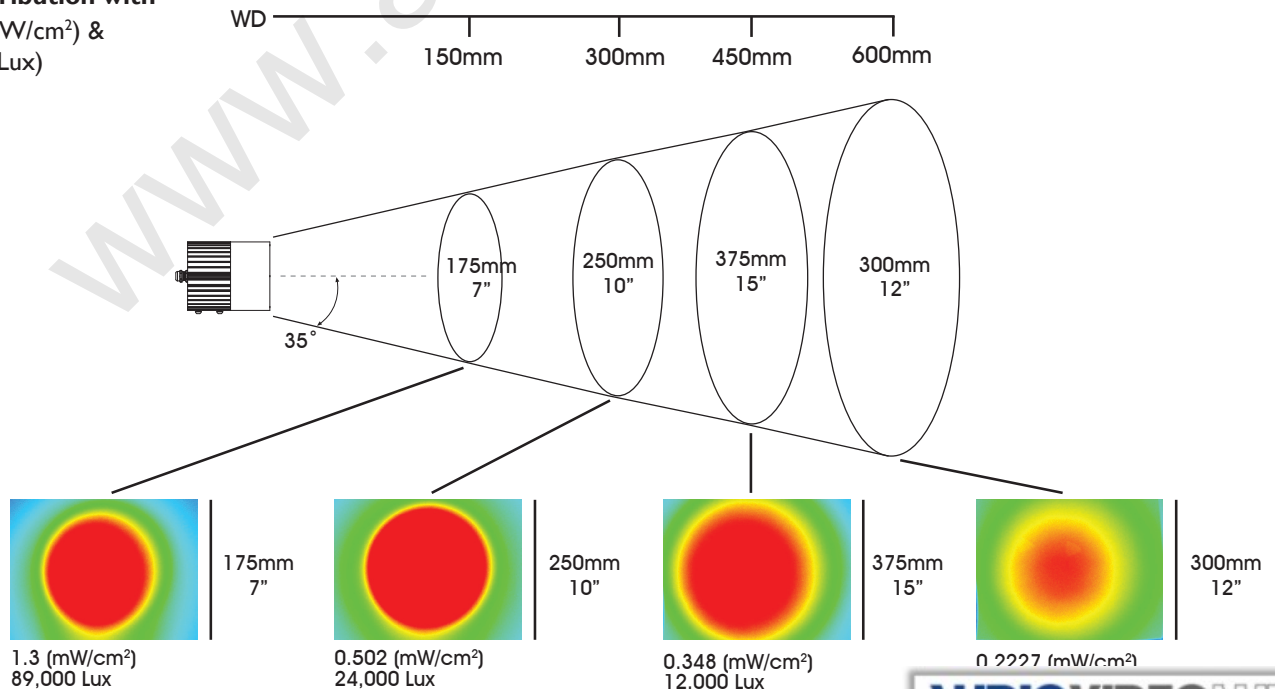

## Dimensional Information

[Click for Installation Models & Drawings](#)

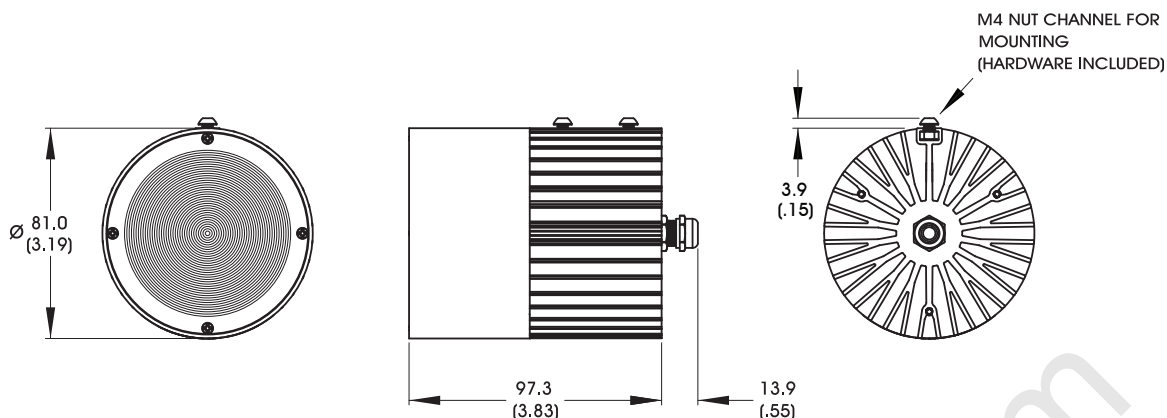


STANDARD CABLE LENGTH: 1.5 Meter (59")

DIMENSIONS ARE IN MILLIMETERS (INCHES)

### Color Temperature (Standard Product)

CCT = 5500k (typical)

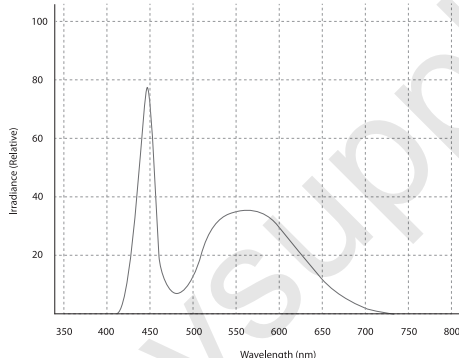

### Power Consumption

ICS: 16 Watts / 0.67A @ 24v DC

### General Specifications

Weight:	555.7 gram (19.6 oz.)	Operating Temperature:	0-60 C°
Finish:	Black Anodized	Meets Specifications:	CE, RoHS

### Power Options

#### C3 CONNECTOR

**Strobe Controller:**  
Pulsar 710

#### IC: Inline Current Source:

**Power Supplies:**  
PS24-TL (1.6A)  
PS24-1.75 (1.75A)  
PS24-4 (4.2A)  
PS24-10 (10A)  
PS24-20 (20A)

#### C5 CONNECTOR

**Strobe Controller:**  
Pulsar 320

### Accessories

**802.767.3830**

V1 Rev.09.25.2013

For design help, accessories or pricing, please contact:  
sales@avsupply or call: 1-858-565-1101

Distributed By: Audio Video Supply -- Tel: 1-800-284-2288 -- www.avsupply.com