

- 2MP CMOS PROCESSOR
- HIGH RESOLUTION: 1920 X 1080 pixels 1080p
- H.264 VIDEO COMPRESSION
- MULTISTREAM
- EXTENDED DYNAMIC RANGE
- IP66 ENVIRONMENTAL PROTECTION
- SD CARD SLOT UP TO 64GB
- REMOTE MONITORING (ANDROID, IOS)
- ONVIF PROTOCOL



GENERAL DESCRIPTION

The **BN5035M2** is a hybrid bullet camera (IP and analog) with the best characteristics for indoor and outdoor installations with IP66 environmental protection. This bullet camera offers high versatility on installations thanks to its 3-axis design. With up to 25mts of irradiation distance in its IR Lamps, this camera provides the best image in the day, night or in warehouse and indoor installations with low illumination.

In today's evolving industry, image quality is not enough to verify that an incident is taking place. Bolide Technology Group with its **iPacMEG** line, pushes the envelope further than standard CCTV systems. Bolide has moved forward leading the industry by expanding into a full line of HD cameras. This new HD line brings possibilities such as video analytics, facial recognition and vehicle plate recognition into a reality. These new features allow the end user to maximize their investment by having better support and increasing efficiency. Better management functions and meeting operational requirements lead to not only a better value but a better overall security solution.

A full HD image of 1920 x 1080 is approximately four and a half times better than a standard IP camera transmitting VGA sized images.

iPacMEG supports H.264 compression standard that has become the industry standard. **iPacMEG** delivers a multi-streaming function that allows up to 3 streams that are adjustable to lower or higher resolutions to fit any investigative challenge or need. All iPac cameras include two-way audio, BNC analog port, back up SD slot and NAS compatibility with CIFS or FTP protocol. The ONVIF protocol allows for a wide variety of compatibility for integration with other systems. Finally, the ANDROID and IOS compatibility allowing for remote monitoring what makes **iPacMEG** universally compatible and an all in one solution.

OPTICAL INFORMATION

IMAGE SENSOR	Sony Exmor 1/2.8"
SIGNAL SYSTEM	NTSC/PAL
CAMERA TYPE	Color Day/Night with ICR filter
RESOLUTION	1920x1080
MINIMUM ILUMINATION	0.1 lux @ F1.2 (0 lux IR ON)
DYNAMIC RANGE	Variable 0~100
WHITE BALANCE	Auto/Manual
AGC	Auto/Fixed 8~102db
BLC	Auto/On-Off
ELECTRONIC SHUTTER	Auto/Manual 1/5-1/50,000 ; 50/60Hz
OSD/CONTROL MODE	Yes
GAMMA	0,45
VIDEO OUTPUT	Enthernet RJ45 / BNC out

AUDIO

INPUT	Optional Microphone: 1x RCA
OUTPUT	1x RCA Output @ 1v Line Level
COMPRESSION	G711 Alaw, G711 U-Law, RAW PCM

LENS

LENS TYPE	3.3~12mm Vari-focal IR corrected
ANGLE OF VIEW	79.3~29.8 degress
IRIS CONTROL	Auto/Manual

IR ILUMINATION

INFRARED WAVELENGHT	25 LED's 850nm
INFRARED LAMP	20-25 mts.
IRRADIATION DISTANCE	

ENVIRONMENTAL

OPERATING TEMPERATURE	14F ~ 131F
OPERATING HUMIDITY	10% - 85% RH
ENVIRONMENTAL PROTECTION	IP66

ELECTRICAL

INPUT VOLTAGE	12V DC / PoE Class 3
RECOMMENDED POWER SUPPLY	DC12V± 5%

CERTIFICATIONS

CE	Yes
FCC	Yes
RoHS Compliant	Yes

VIDEO

COMPRESSION	H.264 High Profile / MJPEG
FRAME RATE	1920 X 1080@30fps
VIDEO STREAMS	3 Stream 10Kbps ~ 12Mbps, CBR, VBR
MOTION DETECTION	Yes
MASKING	3 user defined privacy masking

INTERFACES

ALARM INPUT	1 x No/NC
ALARM OUTPUT	1 x No/NC
NETWORK INTERFACE	1 CH RJ-45 10M/100M self-adaptive Ethernet

RECORDING

RECORDING	Local Micro SD Card, Remote FTP, TCP/UDP CMS, RTSP
NETWORK PROTOCOLS	HTTP, TCP/IP, UDP/IP, RTSP, FTP, DHCP, NTP, Ppoe. Unicast and Multicast supported. Video Streaming from NVMS or 3rd party Software. User Port setting for Web port, RTSP Port, and SDK Control Port and Alarm Port


MECHANICAL

DIMENSIONS	377 x 110mm
WEIGHT	1.65kg
3 AXIS	Yes
VANDAL PROOF	Yes

GENERAL

USERS	Multi Admin/User
WEB BROWSER	IE, Firefox, Chrome, Safari, Nav, Opera
SECURITY	IPv4/IPv6 (DHCP / Fixed)
MOTION DETECTION	Yes
SD CARD	Micro SD (max 64GB)
PoE	Yes
COMPLIANCE	Onvif v22 (Profile S) Standard RFC 2326, Support Quticktime/VLC Player.
RSTP VIDEO	
SMARTPHONE VISUALIZATION	iOS, ANDROID

GENERAL DIMENSIONS

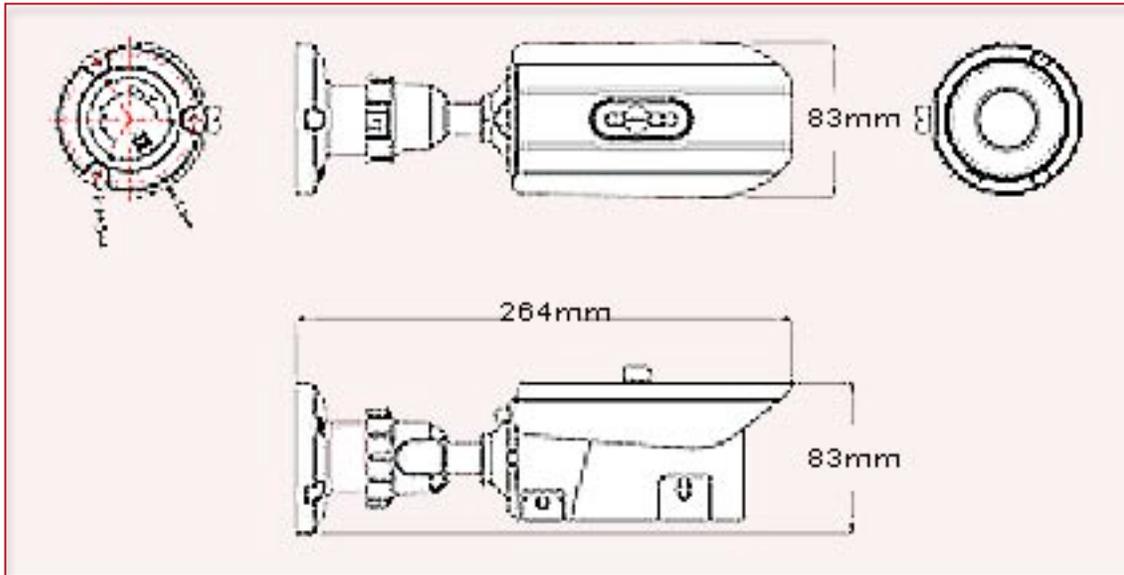

ADVISED POWER SUPPLY

