

2 Mega Pixel Network Outdoor Dome Camera With Remote Focus



Description:

The CDIH226VIRF dome camera provides high quality video at (1080p) 2.0 mega pixel resolution. The Remote Focus capability allows you to optically zoom and fine-focus the camera over the network, eliminating the need to use two installers to hand-focus the camera. The IP66 weatherproof rating makes this bullet camera suitable for outdoor applications such as gas stations, retail parking lots and many others. Costar Video's IP cameras are compatible with the iNEX user interface platform. The iNEX user interface incorporates features such as simplified user management, advanced camera mapping and logical camera grouping making it easier to monitor and access each of your cameras. The iNEX user interface also has the ability to integrate both analog and IP camera technology on the same platform allowing you to have a diverse surveillance system. Costar Video's IP cameras are OnVIF supported. The industry standard OnVIF protocol makes it easy to integrate Costar branded IP cameras with OnVIF compatible recorders.

Features:

- 2 mega pixel resolution (1080p)
- 3-9 mm auto iris and vari-focal lens
- 1/2.7" CMOS Progressive Scan image sensor
- Remote focus capability and zoom control
- True day/night with IR cut filter
- 24 IR LEDs with a 65 foot range
- OnVIF supported; iNEX compatible
- Two-way audio communication
- Black Light Compensation (BLC)
- 2 Dimensional Noise Reduction (2DNR)
- SD memory card supported
- Multiple compression (H.264, MJPEG, MPEG-4)
- Motion detection
- Dual IP streaming
- Event buffering
- Password protection, IP filtering
- Weatherproof IP66 rated
- Power over Ethernet (PoE), DC12V or AC24V



CDIH226VIRF Specifications

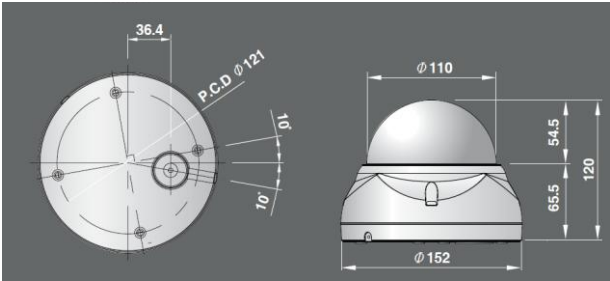
Model	Lens (mm)	Resolution
CDIH226VIRF	3-9 mm	2 Mega Pixel

Power	
Source	DC12V, AC24V or PoE
PoE	802.3af
Consumption	6.0 Watt Max
Sensor	
Image Sensor	1/2 .7" CMOS Progressive Scan
Lens	3-9 mm F1.2 Vari-focal mega pixel
Minimum Illumination	Color: 0.2 Lux (F1.2) B&W: 0.0 Lux (F1.2 with IR)
IR Illumination	24 IR LEDs 65.6 feet (20 m) range
Resolution	1080p, 720p, D1, Half-D1, VGA, QVGA, CIF
Frame Rate	Up to 30 fps
Video Features	
Compression	H.264, MJPEG, MPEG-4
Streaming	Dual Stream
Standards	OnVIF
Camera Functions	
Audio	1ch. Audio-in 1ch. Audio-out
BLC	Yes
Day/Night	Yes; with IR cut filter
DNR	Yes; 2D
Event Buffering	Yes; pre & post event
FTP Upload	Yes
Motion Detection	Yes; 16 windows
Privacy Masking	Yes; 8 windows
Remote Focus	Yes
System	
Network Time Sync	Yes
Zero Configuration	Yes
Security	Password Protection, IP Filtering, HTTPS, SSL
Supported Protocols	IPv4/IPv6, Manual ICP/IP, UTP, HTTP, RTP/ RTSP, NTP, DHCP, SMTP, DDNS, HTTPS, RTCP, FTP, Bonjour
Accessories	
CDMKM	Wall Mount
CDIHRFC	Remote Focus Controller

Network	
Maximum Connections	10 (Live)
NAS Support	Yes
DDNS	Yes
Remote Access	Web, Nautilus16, SmartManager

General Information	
Temperature	-30°F to 122°F (-38°C to 50°C)
Humidity	90% RH Max
Approvals	FCC, CE, UL
IP Rating	IP66
Dimensions (h x Ø)	4.72" x 5.98" (120 x 152mm)

Applications	
	INEX Connect and manage IP and Analog cameras on a single user interface.

Dimensions


Costar
VIDEO SYSTEMS

101 Wrangler, Suite 201 • Coppell, Texas 75019 • Phone: 469-635-6800 • Fax: 469-635-6822 • Toll Free: 1-888-694-STAR (7827)

www.costarvideo.com

Specifications and design are subject to change without notice. Conversions: 1" = 25.4mm Measurement conversions are approximate.