

## UC-B160-Z

### Crestron Flex Wall Mount UC Video Conference System for Zoom Rooms™ Software



- *Front-of-room video conferencing solution for Zoom Rooms™ software*
- *Present, call, conference, and collaborate*
- *Native Zoom Rooms touch screen UI provides a consistent user experience with simple operation and one-touch meeting joins*
- *A complete kit solution — just add displays and mounts*
- *Easy to specify and install — no custom design, programming, or software installation required*
- *Network management and provisioning and system alerts through the Crestron XiO Cloud service*
- *Connects and communicates securely over any enterprise or SMB network*
- *Enterprise-grade security*
- *Supports single or dual display configuration*
- *High-powered 2-way stereo speaker smart soundbar with 180° far-field adaptive beamforming microphone array, advanced AEC & DSP technology, integrated high-definition USB camera with lossless digital autozoom and HDMI® input for laptop and other AV content sources*
- *Includes 10.1 in. (257 mm) tabletop color touch screen with onscreen calendaring and meeting management and optional control of room lighting, shades, thermostats, and other equipment*
- *Complete kit contains the Crestron® smart soundbar & camera, touch screen, UC Engine assembly, cables, power supplies, and 1-year Crestron XiO Cloud Premium subscription*

The Crestron Flex UC-B160-Z system provides a complete video conference room solution for use with the Zoom Rooms intelligent communications platform. It supports single or dual video displays, and features the Crestron UC Video Conference Smart Soundbar & Camera (UC-SB1-CAM-FLEX), 10.1 in. touch screen, and UC Engine Assembly with UC-ENGINE-Z.

#### Native Zoom Rooms™ Software Experience

The UC-B160-Z system features Zoom Rooms conferencing software that enables audio and video connectivity for easy collaboration and content sharing.

#### Crestron® Smart Soundbar & Camera

The **UC-SB1-CAM-FLEX** soundbar eliminates the need to install additional cameras, microphones or speakers. Its high-powered stereo speakers, adaptive beamforming microphone, and advanced digital signal processing deliver exceptional full-duplex, echo-free speakerphone performance. Wideband audio codec support allows for full-spectrum, bidirectional voice communication. Its compact design reduces clutter on the conference table, and even accommodates rooms with no table at all.

The soundbar's integrated Huddly IQ™ camera features an ultra wide-angle 150° diagonal field of view to capture an entire conference room in Full HD 1080p video resolution. Genius Framing digital autozoom intelligently detects the people in the room and frames them perfectly for an optimal view. With Genius Framing, there's no need to control the camera manually or rely on stored presets.

For more information, refer to the **UC-SB1-CAM-FLEX** product page.

#### 10.1 in. Touch Screen

The Crestron TSW-1060 series touch screen makes an elegant statement on any tabletop. PoE (Power over Ethernet) connectivity and a range of mounting options make installation simple for both new and retrofit applications.

The included TSW-1060-TTK provides a convenient tabletop enclosure for a TSW-1060 Touch Screen. The touch screen is angled when installed in the enclosure. The complete assembly may be placed on any flat, level surface. Wiring may be passed out the rear of the enclosure through a grommet and strain relief, or routed through the bottom for a very clean, cordless appearance. The touch screen also offers optional control of room lighting, shades, thermostats, and other equipment.<sup>1</sup>

For more information, refer to the **TSW-1060-B-S** and **TSW-1060-TTK-B-S** product pages.

#### UC Engine Assembly

All the capabilities of a complete Zoom Rooms video conferencing and content sharing solution are empowered by the UC Engine. For ultimate performance, Crestron employs a powerful Intel® NUC Mini PC running Zoom Rooms software. The UC Engine Assembly (UC-BRKT-100-Z-ASSY) streamlines the installation of a Crestron UC system by assembling the UC-ENGINE-Z, HD-CONV-USB-200, and UC-CONN-HD together on one convenient and ready-to-mount bracket.

The complete assembly can be mounted on the wall, or it can be attached to the rear of the display device. Attachment to the display is accomplished using two of the four bolts that also affix the display to a VESA® compliant display mount. The assembly bracket includes mounting holes on its left and right side edges, spaced at 100, 200, and 300 mm (3.94, 7.87, and 11.81 in.) vertically, to allow for attachment to either side of the display mounting plate on the rear of the display device.

### Crestron Flex Wall Mount UC Video Conference System for Zoom Rooms™ Software

For more information, refer to the [UC-BRKT-100-Z-ASSY](#) product page.

#### Network Management and Security

Crestron Flex is an enterprise grade solution, engineered to integrate seamlessly into any Zoom Rooms software deployment. Crestron Flex is ideally equipped for mass deployment throughout any sized corporate, university, medical, military, or government facility.

IoT cloud based provisioning enables complete network configuration in advance of hardware delivery, with touchless updates following installation via Windows Update. Crestron Fusion® or Crestron XiO Cloud management enables monitoring and logging of room and equipment usage, as well as centralized help desk support. Advanced security features ensure privacy, reliability, and compliance with your organization's IT policies.

#### Crestron XiO Cloud™ Provisioning and Management Service

The UC-B160-Z is compatible with the Crestron XiO Cloud™ service, which is an IoT (Internet of Things) based platform for remotely provisioning, monitoring, and managing Crestron devices across an enterprise or an entire client base.<sup>2</sup> The service enables installers and IT managers to deploy and manage thousands of devices in the amount of time it would ordinarily take to manage just one. As part of the UC-B160-Z system, the Crestron XiO Cloud service allows for network management and provisioning and system alerts. System updates are controlled by Windows Update. For more information, visit [www.crestron.com/xiocloud](http://www.crestron.com/xiocloud).

### Specifications

#### Included Components

<b>UC-SB1-CAM-FLEX</b>	UC video conference smart soundbar
<b>TSW-1060-B-S</b>	10.1 in. touch screen, black
<b>TSW-1060-TTK-B-S</b>	Tabletop kit for touch screen, black
<b>UC-BRKT-100-Z-ASSY</b>	UC Engine Assembly, comprised of: UC-ENGINE-Z: UC Engine for Zoom Rooms video; HD-CONV-USB-200: HDMI to USB 3.0 converter for content ingest; UC-CONN-HD: EDID emulator for UC Engine display output; CBL-MDP-HD-0.5: Mini DisplayPort™ to HDMI converter; Mounting Bracket
<b>CBL-CAT5E-7</b>	(2) Ethernet LAN cables for UC Engine, RJ45-to-RJ45, black, 7 ft (2.1 m)
<b>PWE-4803RU</b>	PoE injector for touch screen
<b>CBL-USBC-HD-9</b>	USB-C® to HDMI converter cable, USB Type-C male to HDMI Type A male, 9 ft (2.7 m)
<b>CBL-HD-20</b>	HDMI cable for content source, Type A male-to-male, 20 ft (6.1 m)
<b>CBL-HD-THIN-HS-6</b>	Thin HDMI cable for connecting display device, Type A male-to-male, 6 ft (1.8 m)
<b>DM-CBL-ULTRA-PC-50</b>	Ethernet LAN cable for touch screen, CAT6a, RJ45-to-RJ45, blue, 50 ft (15 m)
<b>CCS-UCA-KB-USB</b>	Wireless keyboard w/touchpad for setup

#### Smart Soundbar & Camera

<b>Speakers</b>	Stereo 2-way, 20 W per channel, 3 in. (76 mm) woofers, 3 x 4-3/8 in. (76 x 112 mm) passive radiators, 1 in. (25 mm) dome tweeters, 80 Hz to 20 kHz (±3 dB) frequency response, 91 dB SPL @ 1 m output level (both channels driven at full power)
<b>Microphone</b>	Linear quad-element far-field adaptive beamforming microphone array, 23 ft (7 m) pickup range, 180° horizontal pickup angle, 20 Hz to 8 kHz frequency response
<b>Audio DSP</b>	Acoustic echo cancellation,

### Crestron Flex Wall Mount UC Video Conference System for Zoom Rooms™ Software

	dereverberation, automatic gain control, dynamic noise suppression, adaptive beamforming, speaker volume control; full-duplex IEEE 1329 Type 1 compliant		(power cord included), 500 mA maximum @ 100-240 VAC, 50/60 Hz
<b>Camera Optics</b>	12 Megapixel Sony® IMX477 Type 1/2.3 CMOS sensor, ultra wide angle six element aspherical glass lens, f/2.8 aperture	<b>Enclosure</b>	Lightly textured gunmetal black finish, plastic housing, perforated stainless steel grilles, die-cast aluminum rear cover, steel hinged mounting bracket
<b>Camera Field of View</b>	150° diagonal, 120° horizontal, 90° vertical	<b>Mounting</b>	Freestanding or surface wall mount at ear/face level
<b>Camera Processing</b>	Intel Movidius® Myriad® X VPU with Neural Compute Engine hardware accelerator, dynamic light optimization, auto white balance, autozoom	<b>Dimensions</b>	Height: 4.57 in. (117 mm) Width: 43.60 in. (1108 mm) Depth: 3.90 in. (100 mm)
<b>Camera Autozoom</b>	Genius Framing automatic lossless digital zoom intelligently frames people in the room	<b>Weight</b>	Approximately 15 lb (6.8 kg)
<b>Camera Noise Reduction</b>	3D noise reduction, bias compensating spatio-temporal filtering, wide area chroma filtering, flicker elimination		Refer to the UC-SB1-CAM-FLEX spec sheet for additional specifications and compliances.
<b>Camera Scaling</b>	Real-time scaling, dewarping, and perspective correction	<b>Tabletop Touch Screen</b>	
<b>Camera Resolution</b>	HD 1080p @ 30 fps	<b>Touch Screen</b>	10.1 in. (257 mm) diagonal capacitive multi-touch TFT active matrix color LCD, 1280 x 800 pixels, displays Zoom Rooms UI plus optional Crestron Smart Graphics® room control UI <sup>1</sup>
<b>Camera Color Space</b>	YCbCr 4:2:0, YCbCr 4:2:2, MJPEG	<b>Ethernet</b>	10/100 Mbps; enterprise grade security and management including IEEE 802.1X, Active Directory® authentication, SSL, TLS, SSH, SFTP (SSH File Transfer Protocol), digest access authentication, password login, HTTPS secure provisioning, Crestron XiO Cloud client, IEEE 802.3at compliant
<b>USB</b>	USB 3.0 Type-B port; UAC 1.0, UVC 1.1, & HID; 2-channel stereo far-end/content signal input, 2-channel mono microphone signal output, camera output; for audio, video, and communications interface to UC Engine	<b>Power over Ethernet</b>	EEE 802.3at compliant PoE or PoE+ PD (Powered Device); - Requests 15 W from an 802.3at Type 2 PSE with LLDP advanced power management; - Requests 30 W (PoE+ Class 4) from an 802.3at Type 2 PSE without LLDP; - Requests 15.4 W (PoE Class 0) from an 802.3af (or 802.3at Type 1) PSE
<b>Analog Audio Input</b>	2-Channel stereo via 3.5 mm TRS mini-phone jack, fixed level (bypasses DSP), 1 Vrms maximum per channel for full rated output, for in-room amplification of an external audio source	<b>PoE Injector</b>	A PoE injector is included to power the touch screen if network PoE is not available
<b>Analog Audio Output</b>	2-Channel stereo via 3.5 mm TRS mini-phone jack, fixed level, 1 Vrms maximum, feeds amplified audio content to an assistive listening system	<b>Construction</b>	Plastic tabletop housing, smooth black finish, edge-to-edge glass with black surround
<b>Status Bar</b>	(1) Multi-segment RGBY LED zero-center mutually diverging linear bargraph; Indicates the speaker volume, microphone mute, and speaker mute in red and green LEDs	<b>Dimensions</b>	Height: 5.42 in. (138 mm) Width: 10.23 in. (260 mm) Depth: 5.69 in. (145 mm)
<b>Main Power</b>	IEC 60320 C14 main power inlet		

### Crestron Flex Wall Mount UC Video Conference System for Zoom Rooms™ Software

**Weight** 41.2 oz (1166 g)  
 Refer to the TSW-1060-B-S, TSW-1060-TTK-B-S, and PWE-4803RU specifications for additional information.

#### UC Engine Assembly

<b>Mini PC</b>	Intel NUC Kit NUC6i7KYK
<b>Processor</b>	6th generation Intel Core® i7-6770HQ processor with Intel Iris® Pro Graphics 580, 8 GB RAM, 256 GB SSD, Intel I219-LM 10/100/1000 Mbps Ethernet, Windows® 10 IOT Edition OS
<b>UC Client</b>	Zoom Rooms Software
<b>Management Client</b>	Crestron XiO Cloud Service
<b>USB</b>	USB 3.0
<b>Content Ingest</b>	HDMI input via HDMI to USB 3.0 converter (model HD-CONV-USB-200, included)
<b>Display Output</b>	Single or dual display support, native Mini DisplayPort™ (primary) and USB Type-C® (secondary) outputs, HDMI outputs enabled via converter cables (included)
<b>Camera Input Resolution</b>	HD 1080p @ 30 fps
<b>Content Input Resolution</b>	HD 1080p @ 60 fps
<b>Display Output Resolution</b>	HD 1080p @ 60 fps
<b>Power</b>	19 VDC via external 100-240 VAC, 50/60 Hz adapter (included)
<b>Construction</b>	Metal mounting bracket, black, preassembled with UC Engine and USB to HDMI converter
<b>Mounting</b>	Surface wall mount behind the display device, or attach to the rear of the display device via the bolts attaching the display to a VESA® compliant display mount; the Crestron bracket includes mounting holes on both side edges, spaced 100, 200, and 300 mm vertically, to allow for attachment to either side of the display mounting plate
<b>Dimensions</b>	Height: 16.00 in. (407 mm) Width: 14.00 in. (356 mm) Depth: 1.62 in. (41 mm)

Refer to the UC-ENGINE-Z, HD-CONV-USB-200, and UC-BRKT-100-Z-ASSY spec sheets for additional specifications and compliances.

#### Model

UC-B160-Z

#### Available Accessories

**TSW-560/760/1060-SMK**  
 Swivel Mount Kit for TSW-x60-TTK Series

**SW-XIOC-S-1**  
 Crestron XiO Cloud Standard Provisioning and Management Service for one device, 1 year subscription

**SW-XIOC-P-1**  
 Crestron XiO Cloud Premium Provisioning and Management Service for one device, 1 year subscription

#### Notes:

1. Room control capability (lighting, shades, thermostats, etc.) requires additional equipment and commissioning to be provided by a Crestron authorized integrator and/or programmer. Additional costs may apply.
2. Complimentary Crestron XiO Cloud subscriptions are subject to the terms of the Crestron Cloudware License Agreement at <https://www.crestron.com/cloudwarelicensepdf>, as well as additional terms of the Crestron Cloudware License Agreement Addendum at <https://www.crestron.com/cloudwarelicenseaddendumpdf>, which control in any conflict with the Agreement. Complimentary subscriptions may be applied to new accounts only. New UC-B160-Z systems may be added to existing Crestron XiO Cloud subscription accounts at a discounted rate. An additional purchase toward the existing subscription account term may be required. For more information, please contact [license@crestron.com](mailto:license@crestron.com).

Crestron, the Crestron logo, Crestron Fusion, Smart Graphics, and Crestron XiO Cloud are either trademarks or registered trademarks of Crestron Electronics, Inc. in the United States and/or other countries. HDMI is either a trademark or registered trademark of HDMI Licensing LLC in the United States and/or other countries. Huddly IQ is either a trademark or registered trademark of Huddly AS in the United States and/or other countries. Intel, Intel Core, and Intel Iris are either trademarks or registered trademarks of Intel Corporation in the United States and/or other countries. Movidius and Myriad are either trademarks or registered trademarks of Movidius Ltd in the United States and/or other countries. Sony is either a trademark or registered trademark of Sony Corporation in the United States and/or other countries. USB Type-C is either a trademark or registered trademark of USB Implementers Forum, Inc. in the United States and/or other countries. DisplayPort and VESA are either trademarks or registered trademarks of Video Electronics Standards Association in the United States and/or other countries. Zoom Rooms is either a trademark or registered trademark of Zoom Video Communications, Inc. in the United States and/or other countries. Other trademarks, registered trademarks, and trade names may be used in this document to refer to either the entities claiming the marks and names or their products. Crestron disclaims

### Crestron Flex Wall Mount UC Video Conference System for Zoom Rooms™ Software

any proprietary interest in the marks and names of others. Crestron is not responsible for errors in typography or photography.

Specifications are subject to change without notice.


©2019 Crestron Electronics, Inc.

Rev 10/08/19

[www.avsupply.com](http://www.avsupply.com)

## UC-B160-Z


Crestron Flex Wall Mount UC Video Conference System for Zoom Rooms™ Software

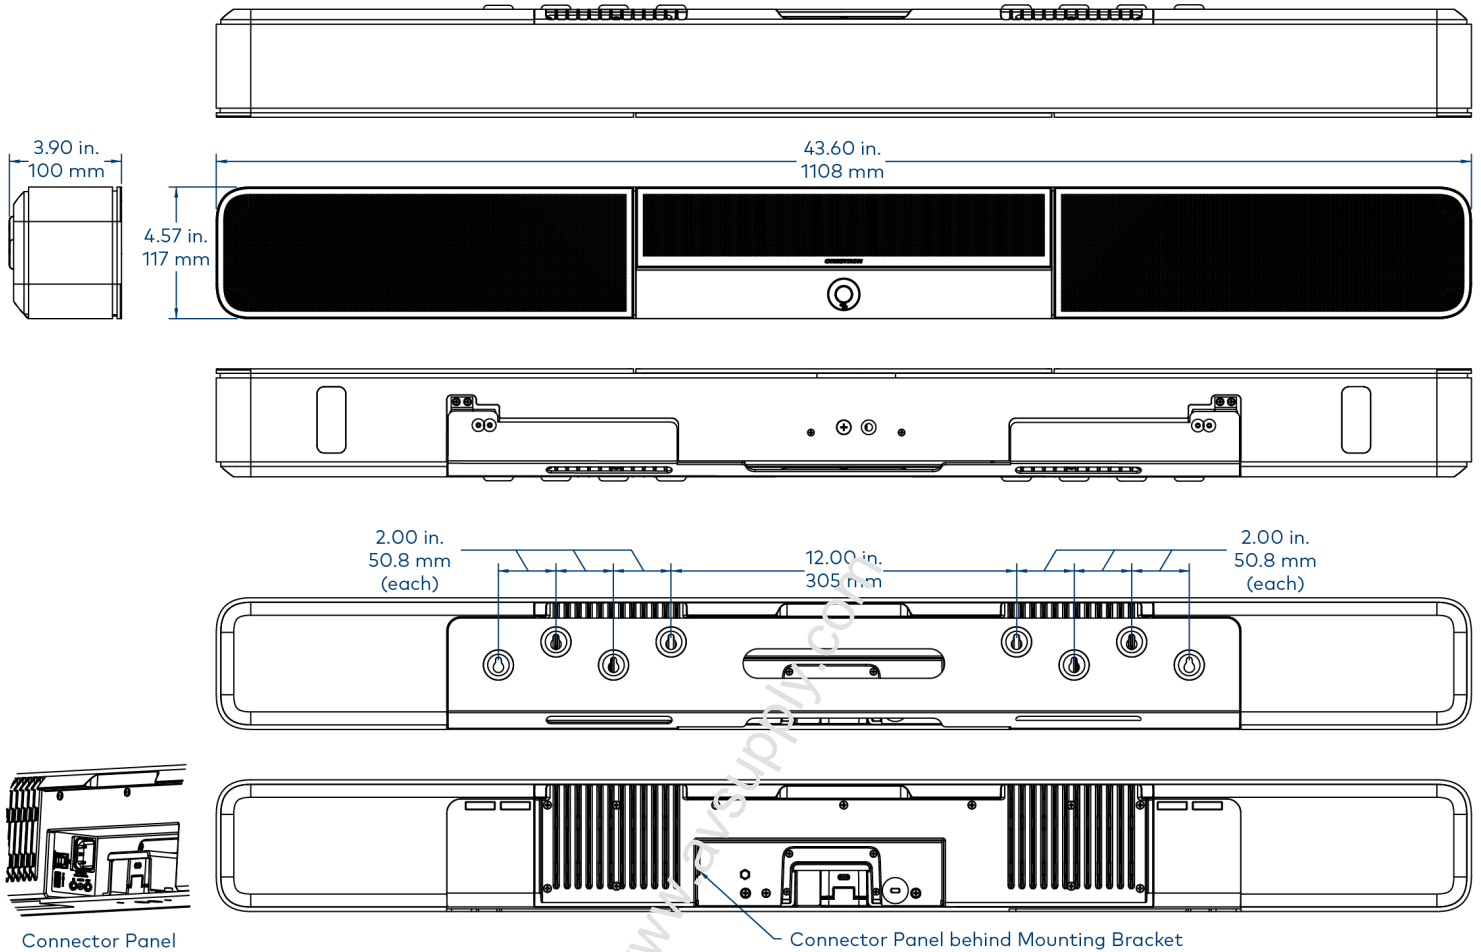

UC-SB1-CAM-FLEX

## UC-B160-Z


Crestron Flex Wall Mount UC Video Conference System for Zoom Rooms™ Software

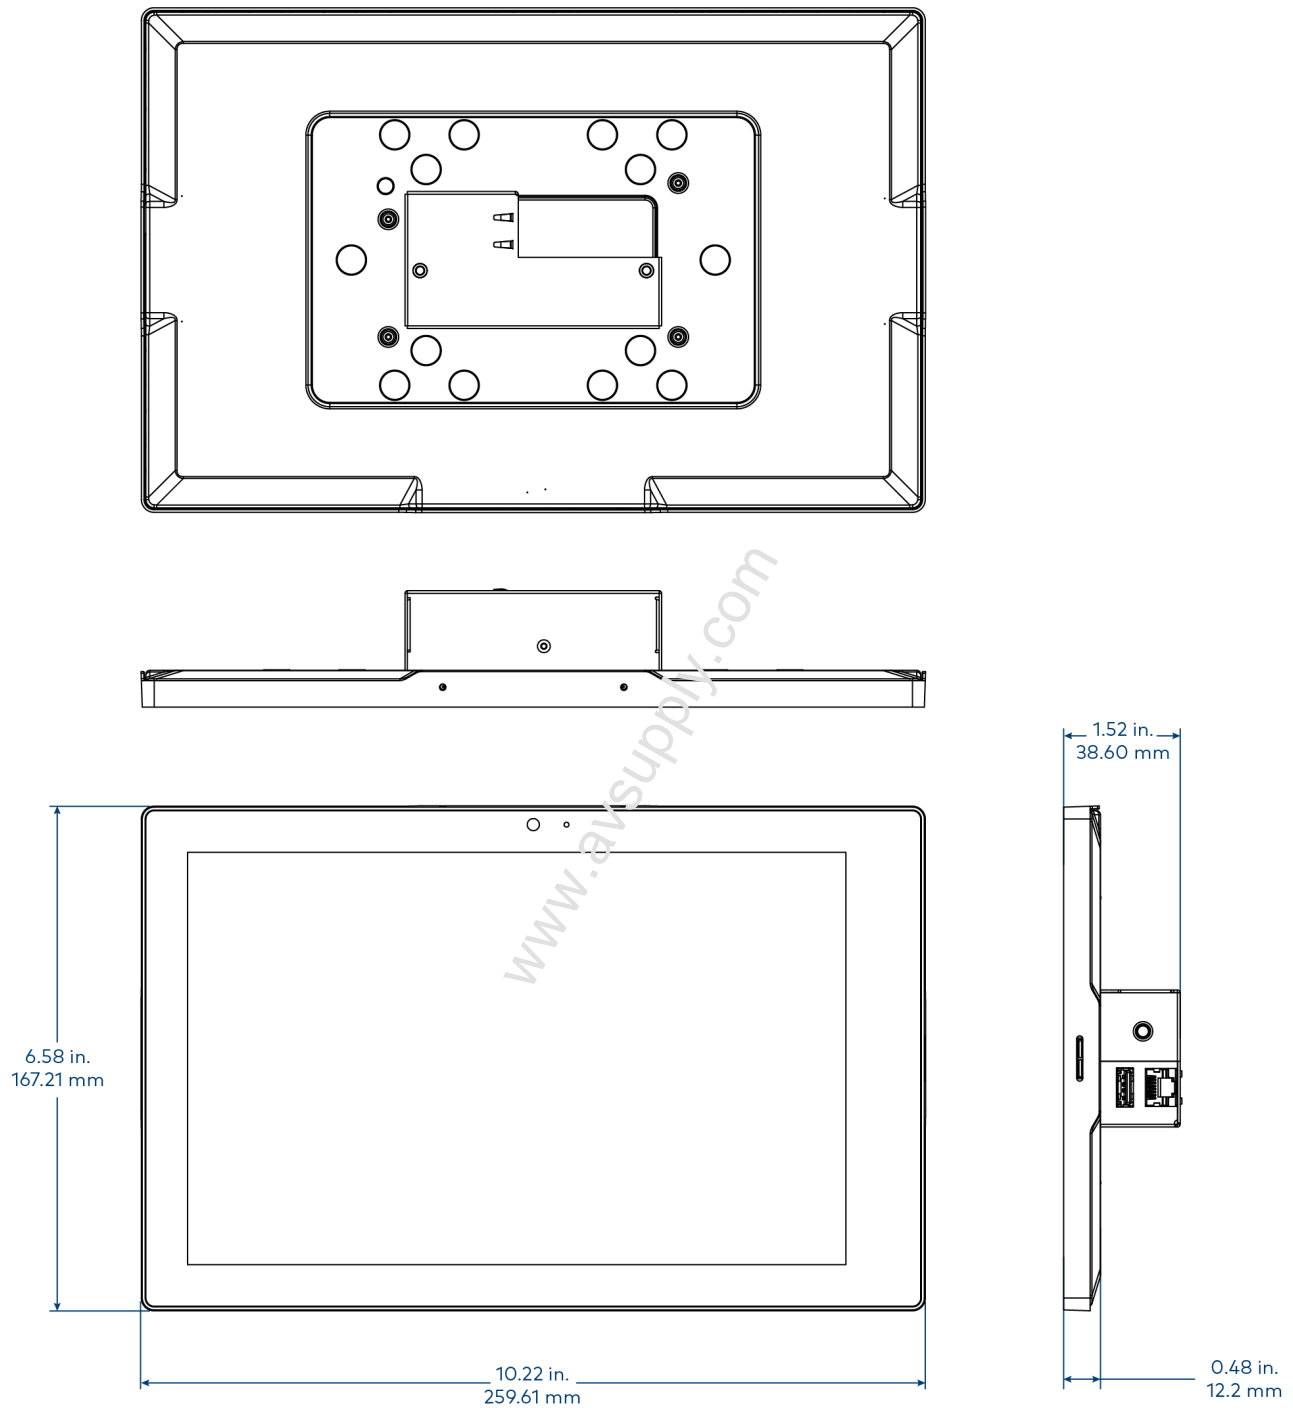

TSW-1060-B-S

## UC-B160-Z

Crestron Flex Wall Mount UC Video Conference System for Zoom Rooms™ Software

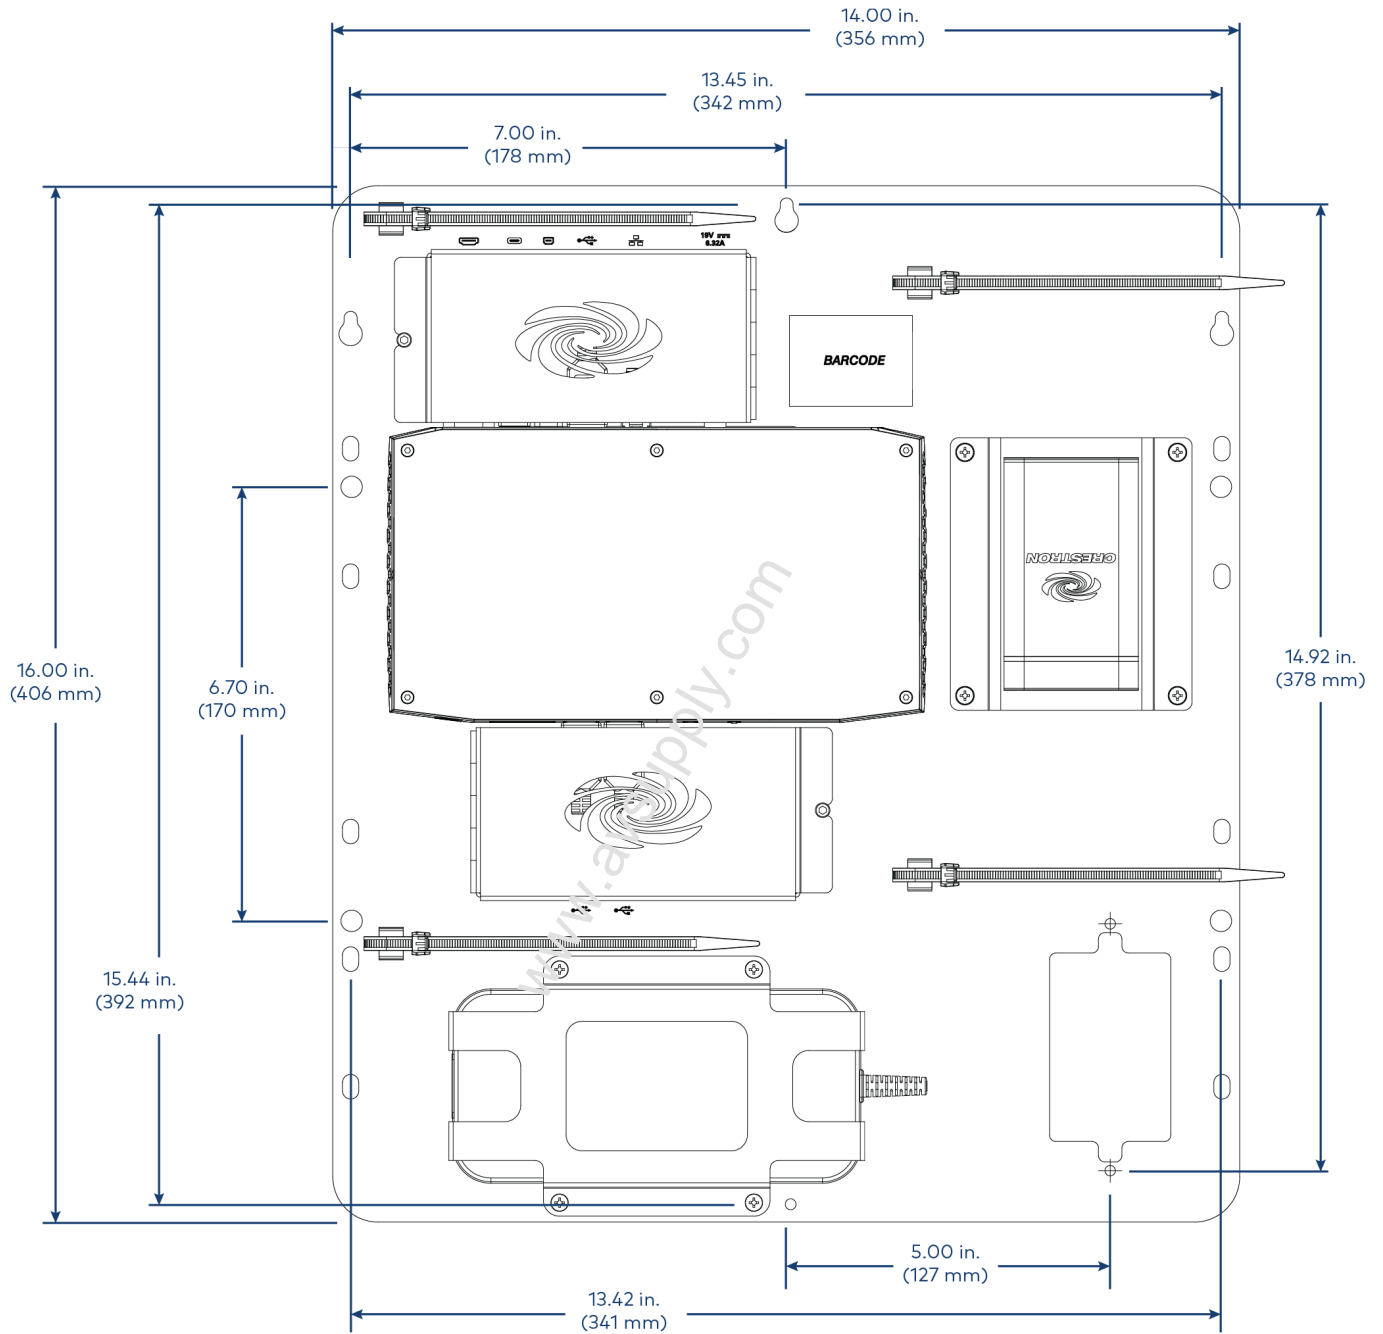

UC-BRKT-100-Z-ASSY