

5" Touch Screen without Camera, Microphone, or PinPoint™ Beacon

- > Ultra clean, modern appearance
- > Thin profile and small footprint
- > Affordable and easy to install
- > 5" (127 mm) widescreen active-matrix color display
- > 960 x 540 qHD display resolution
- > Capacitive touch screen technology
- > Multi-touch capable
- > Smart Graphics® performance
- > Backlit soft-touch capacitive buttons
- > Any/all button hide feature
- > Auto-brightness control
- > H.264 or MJPEG streaming video display
- > Built-in speakers
- > Customizable audio feedback
- > Built-in web browsing^[1]
- > Multi-language support
- > On-screen keyboard
- > Customizable screensaver
- > Single-wire Ethernet connectivity
- > PoE or PoE+ network powered (refer to specifications)
- > Enterprise grade security
- > Web based configuration
- > Cloud-based provisioning and management
- > SNMP monitoring support
- > Pre or post-construction wall mounting
- > Lectern mount over a rectangular cutout
- > TSW-UMB-60 Universal Mounting Bracket included^[3]
- > TSW-UMB-60-PMK Pre-Construction Mounting Kit included^[3]
- > Masonry compatible back box available^[2,3]
- > Tabletop and swivel mount options available^[2]
- > 3 RU rack mount option available^[2]
- > Available in smooth black or white finish

Advanced Touch Screen Control

A Crestron® touch screen offers an ideal user-interface for controlling all the technology in your home, boardroom, classroom, courtroom, or command center. Touch screens simplify and enhance the way you use technology, doing away with those piles of remote controls, cluttered wall switches, disparate smartphone apps, and cryptic computer screens. For controlling audio, video, lighting, shades, HVAC, security, and other systems, Crestron touch screens are fully-customizable with easy-to-use controls and icons, true feedback and real-time status display, live streaming video display, web browsing, and a full-featured media player for an enhanced multiroom entertainment experience.



With its clean, contemporary design highlighted by edge-to-edge glass and stunning color graphics, the Crestron TSW-560-NC Series touch screen makes an elegant statement on any wall, tabletop, lectern, or equipment rack. Perfectly at home in the most contemporary residence or modern office building, its high-tech good looks underline its power for simplifying everyday tasks and functions throughout any facility.

The TSW-560-NC Series delivers the ultimate touch screen experience in an unobtrusive, space-saving design. It features a brilliant 5 inch capacitive touch screen display with Smart Graphics® and 5 soft-touch buttons. PoE connectivity and a range of mounting options make installation a breeze for both new and retrofit applications. Additional features include the abilities to view security cameras and other video sources, and browse the Internet.^[1]

The TSW-560-NC series is a modified version of the [TSW-560 series](#), which eliminates the camera, microphone, and Bluetooth® hardware elements to comply with applications demanding that extra measure of privacy and security.

Smart Graphics®

Crestron touch screens use Smart Graphics to deliver the ultimate user experience *and* the ultimate value by enabling the creation of dynamically rich user interfaces with incredible efficiency and unparalleled functionality. Using Smart Graphics, programmers can swiftly integrate fluid gesture-driven controls, animated feedback, rich metadata, embedded apps and widgets, and full-motion video for a deeply engaging and ultra-intuitive touch screen experience.

Crestron Smart Graphics offers these enhancements and more:

- Cool-looking graphical buttons, sliders, knobs, and gauges that are intuitive and fun to use
- Kinetic effects to enhance the feeling of realism, with lists and toolbars that scroll with momentum at the flick of a fingertip
- Drag-and-drop objects that snap into place, offering an easy way to switch sources



TSW-560-NC-W-S – Shown in White



TSW-560-NC-B-S with TSW-560-TTK-B-S Tabletop Kit

- Dashboard widgets to personalize the touch screen with clocks, weather, news, and other information^[1]
- A power-saving screensaver that allows display of time, temperature, and other text content at a reduced brightness level
- Customizable themes allowing a completely different look and feel for every user, event, or season
- Fully-developed SmartObjects® that enable sophisticated control over complex devices with minimal programming
- A consistent look and feel across multiple touch screens of varying sizes

Soft-Touch Buttons

The TSW-560-NC includes five backlit, soft-touch capacitive buttons for quick access to commonly used functions. These buttons are pre-labeled with icons for “Power”, “Home”, “Lights”, “Up”, and “Down” functions. Each button is programmable via the control system for custom functionality, and any unused button can be hidden by simply turning off its backlight.

Auto-Brightness Control

To ensure optimal visibility under varying lighting conditions, the TSW-560-NC includes a built-in light sensor, which regulates the brightness of the display and button backlighting according to the ambient light level in the room. Separate auto-brightness settings are provided for the display and buttons to allow each to be adjusted or defeated as needed.

Streaming Video

High-performance streaming video capability makes it possible to view security cameras and other video sources right on the touch screen. Native support for H.264 and MJPEG formats allows the TSW-560-NC to display live streaming video from an IP camera, a streaming encoder (Crestron [CEN-NVS200](#), [DM-TXRX-100-STR](#), or similar^[2]), or a [DigitalMedia™ switcher](#). Video is delivered to the touch screen over Ethernet, eliminating the need for any extra video wiring.

Web Browsing

Using its built-in web browser, the TSW-560-NC provides quick access to online program guides and other web-based services at the touch of a button, allowing enhanced touch screen control of DVRs and other appliances without having to pick up a separate tablet or smartphone. If a device can be controlled or managed through a web browser, it can be integrated into the Crestron system through the TSW-560-NC. Of course, the web browser may also be used to simply browse the Internet, check traffic conditions, or look up a recipe.^[1]

On-Screen Keyboard

Typing in passwords, URLs, and text searches is facilitated using the on-screen multi-language keyboard.

Multi-Touch Support

The TSW-560-NC's capacitive touch screen affords enhanced capabilities for browsing web pages using multi-touch gestures.

Audio Feedback

Customized audio files can be loaded to add another dimension to the touch screen graphics using personalized sounds, button feedback, and voice prompts.

Single-Wire Connectivity

A simple Ethernet LAN connection is all that is required to wire the TSW-560-NC, containing all control, video, intercom, and power signals within a single wire.

Power over Ethernet

Using PoE technology, the TSW-560-NC gets its operating power right through the network cable. PoE (Power over Ethernet) eliminates the need for a local power supply or any dedicated power wiring. Crestron PoE switches ([CEN-SW-POE-5](#) or [CEN-SWPOE-16](#)^[2]) offer a total networking solution with built-in PoE for multiple touch screens. A PoE Injector ([PWE-4803RU](#)^[2]) is also available to support a single touch screen.

Note: Refer to the “Power” specifications for additional details.

Enterprise Grade Security

Crestron touch screens employ enterprise-grade networking with robust security features such as 802.1X authentication, TLS encryption, HTTPS connectivity, and Active Directory® integration. These features are imperative to protect your network against service interruptions and malicious intrusions, and to ensure compliance with your organization's stringent network policies. Cloud-based provisioning and management streamlines the process of configuring and monitoring every touch screen on the network and keeping them updated. Additional support for SNMP allows every touch screen to be monitored by your IT administrator alongside every other device on the network.

XiO Cloud™ Connected

XiO Cloud is Crestron's unifying cloud-based platform for remotely provisioning, monitoring, and managing Crestron devices across an enterprise or an entire client base. XiO Cloud enables installers and IT managers to deploy and manage thousands of devices in the amount of time it would ordinarily take to manage just one. It provides a zero-touch solution that allows complete configuration of device settings without any hardware in hand, then simply connect each device on site and let XiO Cloud push out the settings, licenses, drivers, and firmware updates – automatically and securely – for a quick and painless, ready-to-use deployment.

Ongoing XiO Cloud services facilitate daily management and monitoring of every device through a single dashboard with comprehensive reporting and logging, live status viewing and alerts, performance metrics and analytics, scheduled actions and updates, and more. As requirements grow and evolve, new features and functionality can be added easily to one or many devices at any time without ever going on site. XiO Cloud is a subscription-based service offering an adaptable SaaS (Software as a Service) solution with graduated levels of functionality and unlimited scalability.

Wall or Lectern Mounting Options

The TSW-560-NC is easily installed into drywall and other surfaces using the included [TSW-UMB-60](#) Universal Mounting Bracket. By itself, the TSW-UMB-60 provides a post-construction solution for retrofitting the TSW-560-NC into existing drywall. For pre-construction applications, the TSW-UMB-60 can be used along with the included [TSW-UMB-60-PMK](#) Pre-Construction Mounting Kit. Masonry and concrete applications are accommodated using the TSW-UMB-60 along with a [TSW-UMB-60-BBI](#) back box (sold separately). The TSW-UMB-60 is compatible with TSW-560-NC, [TSW-760-NC](#), and [TSW-1060-NC](#) series touch screens, making it easy to swap out devices at any time without having to cut or patch the wall.^[3]

The TSW-560-NC can also be installed in a wooden lectern or podium. When installed, the touch screen protrudes just 1/2 inch from the mounting surface and latches firmly into the mounting bracket leaving no visible screws for an ultra clean appearance. A security latch option is included to deter unauthorized removal of the touch screen.

Tabletop Option

Using the optional Tabletop Kit ([TSW-560-TTK](#)^[2]), the TSW-560-NC becomes a stylish, freestanding touch screen that fits perfectly on a table, desk, or countertop. It can even be permanently attached to the surface using the optional Swivel Mount Kit ([TSW-560/760/1060-SMK](#)^[2]).

Rack Mount Option

The TSW-560-NC can be mounted in a 19" EIA equipment rack using the optional Rack Mount Kit ([TSW-560/760-RMK-1](#)^[2]). When rack mounted, the touch screen occupies three rack spaces.

SPECIFICATIONS

Touch Screen Display

Display Type: TFT active matrix color LCD

Size: 5 inch (127 mm) diagonal

Aspect Ratio: 16:9 qHD

Resolution: 960 x 540 pixels

Brightness: 400 nits (cd/m²)

Contrast: 750:1

Color Depth: 24-bit, 16.7M colors

Illumination: Edgelit LED w/auto-brightness control

Viewing Angle: ±80° horizontal, ±80° vertical

Touch Screen: Projected capacitive, 5-point multi-touch capable

Buttons

Hard Keys: (5) Projected capacitive pushbuttons, backlit w/auto-brightness control, per-button show/hide (backlight enable/disable), pre-labeled with icons for "Power", "Home", "Lights", "Up", and "Down"

Reset: (1) Miniature pushbutton on rear panel for hardware reset

Graphics Engine

Crestron Smart Graphics, multi-language web browser^[1], multi-language on-screen keyboard, screensaver, single scalable streaming video window, setup and diagnostics via web browser or onscreen UI

Languages

Smart Graphics: Arabic, Chinese (Simplified), Chinese (Traditional), Czech, Danish, Dutch, English (UK), English (US), Finnish, French, German, Greek, Hebrew, Hungarian, Italian, Japanese, Korean, Norwegian, Polish, Portuguese, Portuguese (Brazilian), Romanian, Russian, Slovak, Spanish, Swedish, Thai

On-Screen Keyboard: Arabic, Chinese (Simplified), Croatian, Czech, Danish, Dutch, English (UK), English (US), Finnish, French (Canada), French (Switzerland), German, Hebrew, Hungarian, Italian, Japanese, Norwegian Bokmal, Polish, Portuguese, Russian, Serbian, Spanish, Swedish, Turkish

Voice Recognition: Afrikaans (South Africa); Chinese, Mandarin (China, Simplified); Chinese, Mandarin (Hong Kong, Simplified); Chinese, Mandarin (Taiwan, Traditional); Chinese, Yue (Hong Kong, Traditional); Czech (Czech Republic); Dutch (Netherlands); English (Australia); English (Canada); English (Generic); English (India); English (New Zealand); English (South Africa); English (UK); English (US); French (France); German (Germany); isiZulu (South Africa); Italian (Italy); Japanese (Japan); Korean (South Korea); Polish (Poland); Portuguese (Brazil); Russian (Russia); Spanish (Spain); Turkish (Turkey)

Web Browser: Arabic, Bulgarian, Catalan, Chinese, Croatian, Czech, Danish, Dutch, English, Filipino, Finnish, French, German, Greek, Hebrew, Hindi, Hungarian, Indonesian, Italian, Japanese, Korean, Latvian,

Lithuanian, Norwegian Bokmal, Pashto, Persian, Polish, Portuguese, Romanian, Romansh, Russian, Serbian, Slovak, Slovenian, Spanish, Swedish, Thai, Turkish, Ukrainian, Vietnamese

Memory

RAM: 2 GB DDR3L

Storage: Firmware/Application: 4 GB Class 10 microSD card;
System: 4 GB eMMC

Maximum Project Size: 600 MB

Communications

Ethernet: 10/100 Mbps, auto-switching, auto-negotiating, auto-discovery, full/half duplex, TCP/IP, UDP/IP, CIP, DHCP, SSL, TLS, SSH, SFTP (SSH File Transfer Protocol), IEEE 802.1X, SNMP, IPv4 or IPv6, Active Directory authentication, HTTPS web browser setup, XiO Cloud client, IEEE 802.3at compliant

Streaming Decoder

Video Formats: H.264 (MPEG-4 part 10 AVC), MJPEG

Audio Formats: AAC stereo

Bitrates: Up to 25 Mbps (20 Mbps maximum recommended)

Streaming Input Resolutions: Up to 1920x1080@30fps

Streaming Protocol: RTSP

Audio

Features: Built-in speakers

Audio Feedback Formats: MP3

Connectors

LAN PoE: (1) 8-pin RJ45 connector, female, with 2 LED indicators;
10Base-T/100Base-TX Ethernet port;

PoE+ PD port;

Green and yellow LEDs indicate Ethernet port status

USB: (1) USB Type A connector, female;
(not used)

Power

Power over Ethernet:

IEEE 802.3at Type 2 compliant PoE+ PD (Powered Device);

- Requests 15 Watts from an 802.3at Type 2 PSE with LLDP advanced power management;
- Requests 30 Watts (PoE+ Class 4) from an 802.3at Type 2 PSE without LLDP;
- Requests 15.4 Watts (PoE Class 0) from an 802.3af (or 802.3at Type 1) PSE

Environmental

Temperature: 32° to 112° F (0° to 45° C)

Humidity: 10% to 90% RH (non-condensing)

Heat Dissipation: 44 BTU/hr

Construction

Housing: Plastic, smooth black or white finish, edge-to-edge glass with black or white surround

Mounting: Surface mount over a 2-1/5" H x 3-3/4" W (56 mm H x 96 mm W) cutout, 2-13/16 in (72 mm) minimum mounting depth, 1-1/4 in (32 mm) maximum mounting surface thickness, pre/post-construction mounting bracket assembly included^[3]; optional back box, rack mount, and tabletop options available separately

Dimensions

Height: 3.49 in (89 mm)

Width: 5.68 in (145 mm)

Depth: 1.52 in (39 mm)

Dimensions do not include the mounting bracket or add-on accessories

Weight

9.5 oz (267 g)

Compliance

UL Listed for US & Canada, IC, CE, FCC Part 15 Class B digital device

www.avsupply.com

Notes:

1. Web browsing, weather information, and certain other functions require an Internet connection.
2. Item(s) sold separately. Refer to each product's spec sheet for complete information.
3. The [TSW-UMB-60](#) mounting bracket (included) is compatible with older [TSW-UMB-PMK](#) preconstruction mounting kits and [TSW-550-BBI](#) back boxes, allowing the TSW-560-NC touch screen to be installed in place of a previous generation TSW-5xx series touch screen, or any other device that was originally installed using a TSW-UMB-PMK or TSW-550-BBI, without modification to the wall.

Crestron, the Crestron logo, DigitalMedia, PinPoint, Smart Graphics, SmartObjects, and XiO Cloud are either trademarks or registered trademarks of Crestron Electronics, Inc. in the United States and/or other countries. Bluetooth is either a trademark or registered trademark of Bluetooth SIG, Inc. in the United States and/or other countries. Active Directory is either a trademark or registered trademark of Microsoft Corporation in the United States and/or other countries. Other trademarks, registered trademarks, and trade names may be used in this document to refer to either the entities claiming the marks and names or their products. Crestron disclaims any proprietary interest in the marks and names of others. Crestron is not responsible for errors in typography or photography. Specifications are subject to change without notice.
©2018 Crestron Electronics, Inc.

MODELS & ACCESSORIES

Available Models

TSW-560-NC-B-S: 5" Touch Screen without Camera, Microphone, or PinPoint™ Beacon; Black Smooth

TSW-560-NC-W-S: 5" Touch Screen without Camera, Microphone, or PinPoint™ Beacon; White Smooth

Included Accessories

TSW-UMB-60: Universal Mounting Bracket for TSW-x60 Series

TSW-UMB-60-PMK: Pre-Construction Mounting Kit for TSW-UMB-60

Available Accessories

TSW-560-TTK Series: Tabletop Kit

TSW-560/760/1060-SMK: Swivel Mount Kit for TSW-560-TTK

TSW-UMB-60-BBI: Wall Mount Back Box for TSW-UMB-60

TSW-560/760-RMK-1: Rack Mount Kit

PWE-4803RU: PoE Injector

CEN-SW-POE-5: 5-Port PoE Switch

CEN-SWPOE-16: 16-Port Managed PoE Switch


CEN-NVS200: Network Video Streamer

DM-TXRX-100-STR: HD Streaming Transmitter/Receiver




SW-XIOC-S Series: XiO Cloud™ Standard Provisioning and Management Service for one device

SW-XIOC-P Series: XiO Cloud™ Premium Provisioning and Management Service for one device

www.avsupply.com

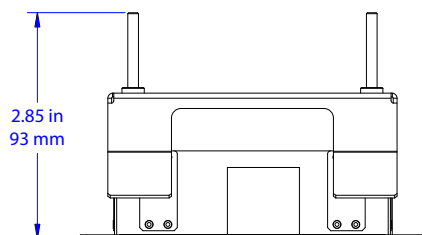

TSW-UMB-60
wall mounting bracket
(included)

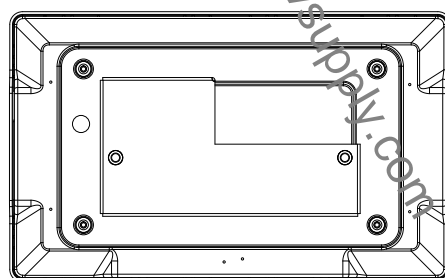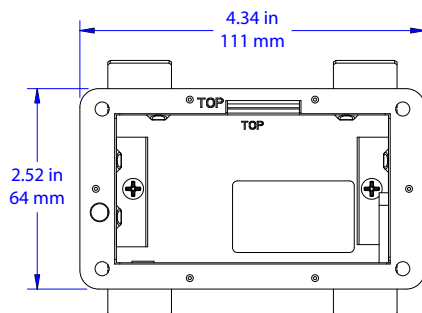

TSW-560-NC
touch screen

