


VMAX960H 480@ 960H Real Time Recording



Dimensions (unit : mm)

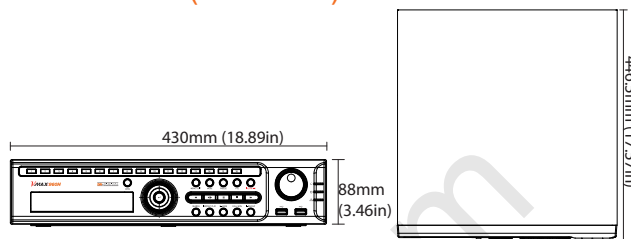


Summary

The VMAX960H is an advanced H.264 Stand Alone digital video recorder that records 480fps, Real-Time at 960H, D1, 2CIF, and CIF. All the great features, such as Panoramic Search, Single Channel Search in Playback, Single Touch Backup and Event management, can be controlled with the front panel, included USB mouse, or IR remote control. And with our special Image Enhancer, you can add the convenience of controlling cameras installed up to 6,000ft from the DVR, without losing clarity or quality. The DVR is available with basic storage from 1 to 16 terabytes.

Features

- Advanced H.264 Stand Alone DVR
- Multiplex - Live, Playback, Recording, Backup, Network, Configuration
- Record 30 Frames per Second on Every Channel
- One Touch Video Backup, Reverse Playback, & Emergency Recording
- Simple & Free DDNS Support
- Mirroring (RAID 0,1,10)
- Web-Based Client with Multi-User Access
- Scheduled Network Backup
- 8/16 Channels Looping Output
- S.M.A.R.T HDD Health Check with Email Notifications
- HDD Calculation and Auto Recording Configuration
- 16 Audio Input, 2 Audio Output
- 16 Sensor Input, 4 Relay Output
- Email & Text Event Notifications
- Watermark Verification (Digital Signature Verification)
- Help Menu on Major Functions
- Auto & Manual Firmware Upgrade Available
- USB Mouse, IR Remote Control, GUI
- Central Management Software, Up to 128CH
- Mobile Application for iPhone, iPad, iPod, Android Smart Phones and Tablets, and Kindle Fire
- MAC Compatible Remote Software

Available Models

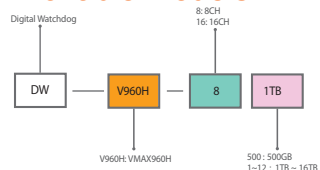

Specifications

VIDEO		
Video Input		8/16 Channels
Video Live	Framerate	1-30fps
	Resolution	960H, D1, 2CIF, CIF
Video Output		HDMI, Composite, VGA, SPOT
Loop Output		8/16 Channels Looping Output
Audio	Input	8/16 Input
	Output	2 Output
	Audio Codec	ADPCM
Alarm	Sensor Input	8/16 Input
	Alarm Out	4 Output
Operating System		Embedded Linux
Serial		1xRS232, 2xRS485 for PTZ Camera & Contriller, 2xUSB 2.0
User Interface	Menu Display	Graphical User Interface (GUI)
	Control Methods	IR Remote Control, USB Mouse, Front Panel Buttons
Screen Display Mode		16CH: 1,4,9,16, Single Channel Playback, Sequence
Screen Resolution		1080p, 720p, 1280X1024, 1024X768, 720X480 (NTSC), 720X576 (PAL)
Performance		
Recording	Compression	H.264
	Recording Mode	Schedule, Event, Time-Lapse, Panic, Continuous, Pre & Post Event, Motion, Recording Configuration per Channel
	Pre Recording	0-15 Seconds
	Post Recording	10-10 Seconds
	Recording Rate	16CH: 480/ 400 fps (NTSC/ PAL) @ All Resolutions 8CH: 240/ 200 fps (NTSC/PAL) @ All Resolutions Full 960H Real-Time Recording, 30fps @ All Resolutions
Playback	Recording Resolutions	16CH: 480/ 400 fps (NTSC/ PAL) @ All Resolutions 8CH: 240/ 200 fps (NTSC/PAL) @ All Resolutions
	Playback Rate	Full 960H Real-Time Playback, 30fps @ All Resolutions
	Playback Resolution	Full 960H Real-Time Playback, 30fps @ All Resolutions
	Fast Forward Functions	x1/16, x1/8, x1/4, x1/2, x1, x2, x4, x8, x16, x32
	Rewind Functions	First Data, Last Data, Frame-by-Frame
	Search Modes	Date & Time, Record Table, Calendar, Event Preview, Bookmark, Play from Search, System & Event Logs
Storage	HDD Interface	Up to 4 HDD
	Program Memory	Built-in Flash (512Mb)
	Max. Internal HDDs	Up to 16TB (4HDD x 4TB)
	External Storage	USB Flash Drive, USB HDD, DVD
	CD/ DVD RW	Yes
	HDD Interface Type	SATA-II, SATA-III
	HDD Health Check	Built-in Flash (512Mb)
Features	FaceStamp	Temperature, S.M.A.R.T. with E-mail Notifications
	Image Enhancer	Employee Management and Fraud Prevention
	Camera Color Control	Brightness, Contrast, Saturation, Hue
	Digital Zoom	Yes (Live & Playback)
	Software Upgrade	USB Flash Drive, Network Upgrade, FTP Remote Upgrade
	3G Mobile	Mobile App for Apple & Android Smart Phones & Tablets
	Covert Channel	Yes (Live & Playback)
Network		
Network Connection		Ethernet (1 x Gigabyte 10/100/1000 Mbps)
Streaming	Transmission Speed Live	480/400 fps @ D1 (NTSC/ PAL)
	Protocols	Static, DDNS, DHCP
Access	Web Viewer	Live, Playback, & Config. up to 10 multiple connections
	Client Monitoring Software	ACS (Client S/W), MAC (Apple S/W), Pivot (CMS S/W)
General		
Operating Temperature/ Humidity		5 ~ 40°C (41 ~ 104°F)
Operating Humidity		Less than 80% (Non-Condensing)
Electrical	Power Requirement	12V 9A D/C
	Power Consumption	108W
Dimensions		18.89 X 3.46 X 17.57 in (430 X 88 X 446.5mm)
Weight		13.84lb (6.28kg)

*Specification is subject to change without prior notice.

Toll Free: 866.446.3595 / Fax: 813.888.9262 www.digital-watchdog.com

For design help, accessories or pricing, please contact:
sales@avsupply or call: 1-858-565-1101

AUDIOVIDEO SUPPLY
1-800-284-2288 sales@avsupply.com
www.avsupply.com

Distributed By: Audio Video Supply -- Tel: 1-800-284-2288 -- www.avsupply.com