


5,500 ANSI Lumens • XGA (1024x768) • 4:3 • DLP®

# EIKI-X5500

"Meeting Room" Series Projector

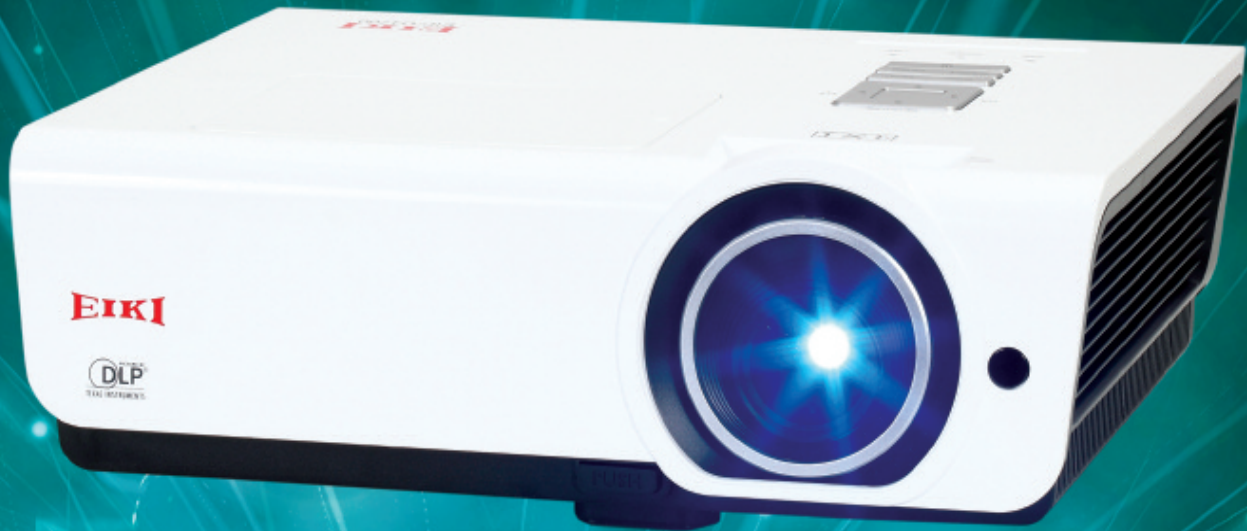

24/7 Operability\*<sup>1</sup>  
Excellent choice for Classrooms or Conference Rooms!

## Key Features:

- △ 5,500 ANSI lumens bright with 80% uniformity and a 2200:1 contrast ratio.
- △ HDMI and Display Port Digital connectivity with HDCP compliance.
- △ Native XGA resolution. Compatible with inputs up-to UXGA and WSXGA+.
- △ Supports analog and digital video input in all color standards up-to 1080p.
- △ Compatible with Crestron RoomView™ & AMX Device Discovery Technology.
- △ Vari-focal mid-range (1.2:1) manual zoom and focus lens. Fixed image offset.
- △ Accepts composite, component, and S-Video in all major standards.
- △ Displays both 4:3 and 16:9 aspect ratios. Supports most HDTV resolutions.
- △ Built-in 3 Watt sound system. Closed Caption decoding (NTSC).
- △ Wired network monitoring and control. Digital zoom: 50% to 400%.
- △ 3D Function (glasses not included).
- △ Top-accessed lamp for ease of maintenance.
- △ Custom warm-up screen. Auto input selection.
- △ Security bar. Kensington® MicroSaver® security slot. PIN lock.
- △ 3 year projector warranty.

\*<sup>1</sup> Replace lamp as necessary.




**EIKI®**  
Projectors... and more!

# EIP-X5500 Specifications:


|                                       |   |
|---------------------------------------|---|
| Brightness                            | 5,500 ANSI Lumens   |
| Contrast Ratio                        | 2,200:1   |
| Illumination Uniformity               | 80%   |
| Resolution and Aspect Ratio           | XGA (1024 x 768), 4:3                                       |
| Color Reproduction                    | 1.07 billion colors   |
| Projection Lamp                       | 310 Watts UHP   |
| Estimated Lamp Life                   | up-to 4,000 hours   |
| Total Pixels                          | 786,432 (1024 x 768) x 1                                    |
| Imaging System                        | 0.7" DMD™ DLP® chip x 1                                     |
| Scanning Frequency                    | Auto: H Sync. 31 ~92 kHz, V Sync. 48 ~ 120 Hz               |
| Pixel Clock                           | up-to 150 MHz   |
| Lens                                  | Attached (Vari-focal) Manual Zoom and Focus                 |
| Lens Specs                            | Speed: f : 2.6 ~2.81; FL: 1.023 ~ 1.173 in (26.0 ~ 29.8 mm) |
| Lens Ratios                           | Zoom Max:Min: 1.15:1; Throw:Width 1.8 ~ 2.1:1               |
| Image Diagonal                        | 24 ~ 300 in (60.9 ~ 762 cm)                                 |
| Image Width                           | 1.57 ~ 20 ft (0.48 ~ 6.1 m)                                 |
| Throw Distance                        | 4.92 ~ 32.8 ft (1.5 ~ 10.0 m)                               |
| Projector Elevation Adjustment (legs) | up-to 10°   |
| Maximum Pitch                         | up-to 15° Up or Down  |
| Fixed Image Offset                    | 112.3% of Image Height up                                   |
| Vertical Keystone Correction          | Digital: up-to 30° Up or Down                               |
| Image Orientation                     | Normal, Reversed, Inverted                                  |
| Local Control / Power Management      | Full Function / Auto Shutdown                               |
| Remote Control / Service              | Wireless (with laser pointer) x 1 / USB-B x 1               |
| RS-232 Control                        | Dsub9 x 1   |
| LAN Port                              | RJ45 x 1  |
| Computer Input in Pixels              | up-to 1600 x 1200 (4:3), 1680 x 1050 (16:10)                |
| Analog 4x3 Inputs                     | UXGA, SXGA+, SXGA, XGA, SVGA, VGA, MAC                      |
| Analog Wide Inputs                    | WSXGA+, WXGA+, WXGA   |
| Digital 4x3 Inputs                    | UXGA, SXGA+, SXGA, XGA, SVGA, VGA, MAC                      |
| Digital Wide Inputs                   | WSXGA+, WXGA+, WXGA   |
| Video Formats                         | NTSC / PAL / SECAM  |
| Video Input Analog                    | 480i/p, 575i/p  |
| Video Input Digital                   | 480p, 575p, 720p, 1080i/p                                   |
| Image Signal Resizing                 | Smart Scaling Technology                                    |

|  |   |
|--|---|
| <b>Image Signal Inputs</b>                                     |   |
| Computer 1 / Component (w/optional adapter)                    | Dsub15 x 1  |
| Computer 2 / Component (w/optional adapter)                    | Dsub15 x 1  |
| Digital Video (w/ HDCP)  | HDMI x 2  |
| Digital Video (w/ HDCP)  | DisplayPort x 1   |
| S-Video  | S-Video x 1   |
| Composite Video  | RCA x 1   |
| <b>Audio Signal Inputs</b>                                     |   |
| Computer Audio   | MiniStereo x 1  |
| Video Audio  | RCA x 2 (L/R)   |
| <b>Outputs</b>   |   |
| Computer Monitor (Analog)                                      | Dsub15 x 1  |
| Audio Output   | Variable, Stereo: MiniStereo x 1                                  |
| Amplifier  | Mono: 3 Watt  |
| Speaker  | 1.4 in (3.7 cm) x 1 (Mono)  |
| Screen Trigger   | DC12V x 1   |
| 3D   | 3D Sync x 1   |
| Fan Noise  | as low as 35 dBA  |
| Cabinet Size (HxWxD)   | 4.75 x 13.3 x 10.5 in (12.0 x 33.8 x 26.7 cm)<br>(excluding legs) |
| Weight   | 8.4 lb (3.8 kg)   |
| Packaged Cabinet Size (HxWxD)                                  | 7.7 x 17.9 x 19.6 in (19.5 x 45.4 x 49.7 cm)                      |
| Packaged Weight  | 12.8 lb (5.8 kg)  |
| Operating Temperature  | 41 ~ 95°F (5 ~ 35°C)  |
| Power Consumption  | 0.5 W in Eco Standby mode, up-to 370W                             |
| Heat   | up-to 1,263 BTU/hr  |
| Security Facilities  | Security Bar, Kensington® Security Slot                           |
| UPC  | 4571194676600   |
| User Maintenance   | Replace Lamp  |
| <b>Limited Warranty: to the original end-use customer only</b> |   |
| Projector  | *3 years / 6000 hours   |
| Lamp   | *1 year ownership / 500 hours use<br>(which ever occurs first)    |

EIKI® is a registered trademark of Eiki International, Inc. Kensington® is a registered trademark of ACCO Brands Corporation. DLP® and DMD™ are trademarks of registered trademarks of Texas Instruments.

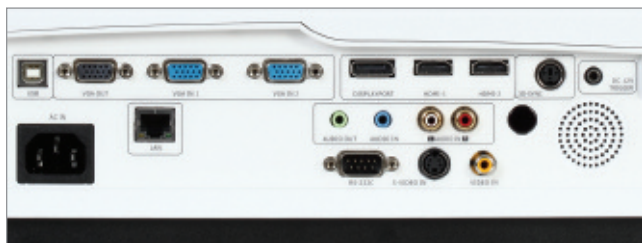

Includes a full complement of connections, including network control.

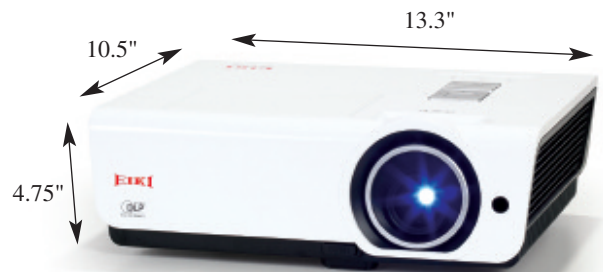

EIP-X5500 • XGA • DLP® projector.



Connect and project.



Easy to change long-life lamp.

#### INCLUDED ACCESSORIES:

Quick Start Guide, Owner's Manual on CD-ROM, VGA Computer Input Cable (Dsub15 to Dsub15), 6.0 ft (1.8 m) Detachable Power Cord, Remote Control (with 2 AAA Batteries), Soft Carry Bag.

#### OPTIONAL ACCESSORIES:

Replacement Lamp, Component Video Input Cable (Dsub15 to 3RCA), Ceiling Mount, Ceiling Post and Plate.

Specifications subject to change without notice. ©2013 Eiki International, Inc. Printed in the USA. 12/15/13

**EIKI**  
Projectors... and more!  
www.eiki.com

#### Eiki International, Inc.

30251 Esperanza Δ Rancho Santa Margarita, CA 92688-2130  
Phone: 800-242-3454 Δ Fax: 800-457-3454 Δ E-mail: usa@eiki.com

In Canada: 310 First St.- Unit 2, P.O. Box 156 Δ Midland, ON L4R 4K8  
Phone: 800-563-3454 Δ Fax: 800-567-4069 Δ E-mail: canada@eiki.com