


### EZN368

3-Megapixel IR & WDR,  
Outdoor Bullet Network Camera




ONVIF  
Compliant

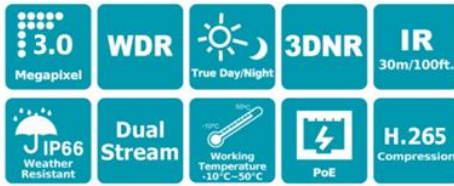

### Features


- SONY Progressive Scan CMOS sensor
- Astounding image quality from the 3.6mm lens
- True Wide Dynamic Range Function (120dB)
- Provides True Day/Night functionality with automatic IR filter operation
- Extended IR range up to 30m / 100ft. with 15 LEDs (Depending on scene IR reflectivity)
- Multi-streaming from H.265 / H.264 / MJPEG
- Weather proof IP66-rated
- The flexible angle viewing with its 3-Axis rotation design allows wall or ceiling mounting
- Special design, easy installation and operation
- Support Motion Detection & Email Notification
- Supports live monitoring of video from mobile devices via MobileFocus / MobileFocus plus Apps (iOS & Android)
- Support Power over Ethernet / 12VDC

## Dimensions

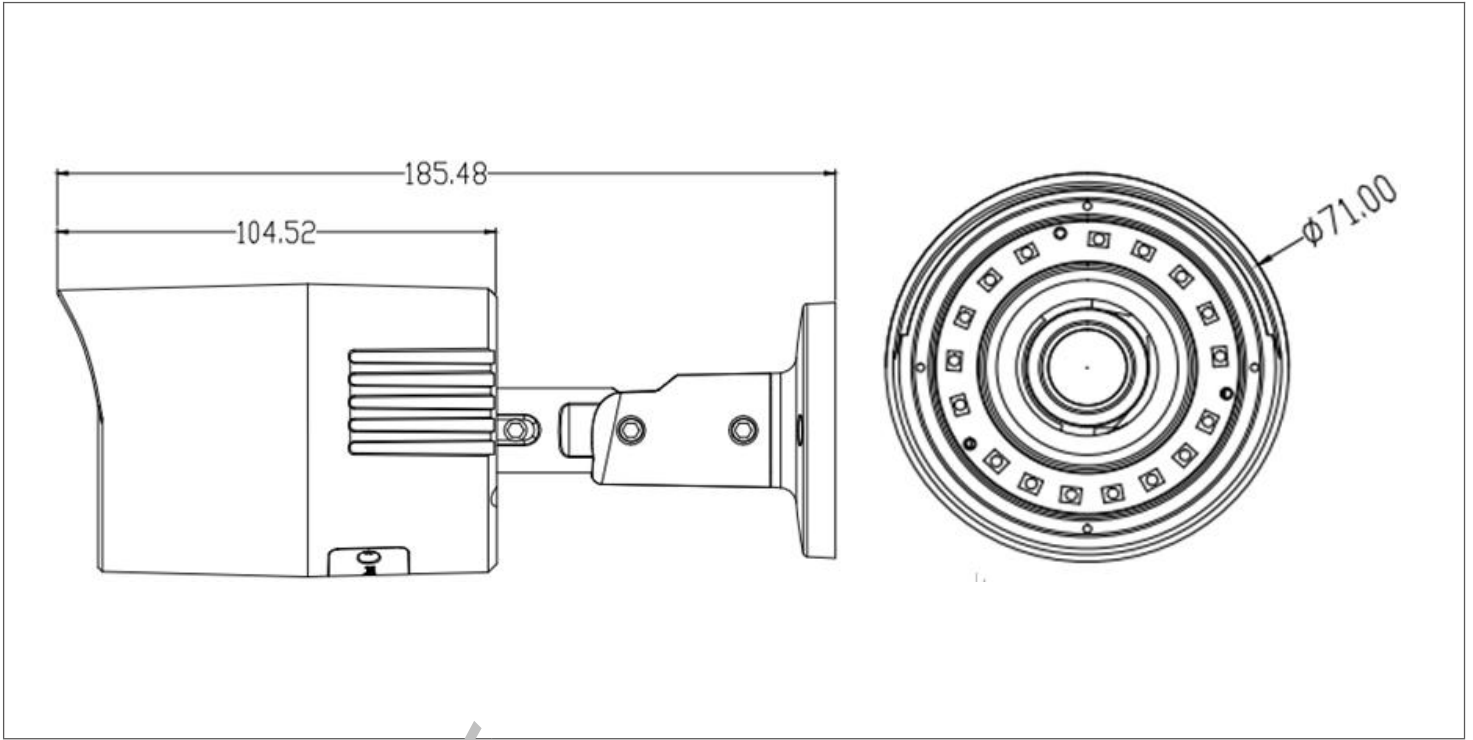

## Accessory

PBOX-A32-1  
Junction Box

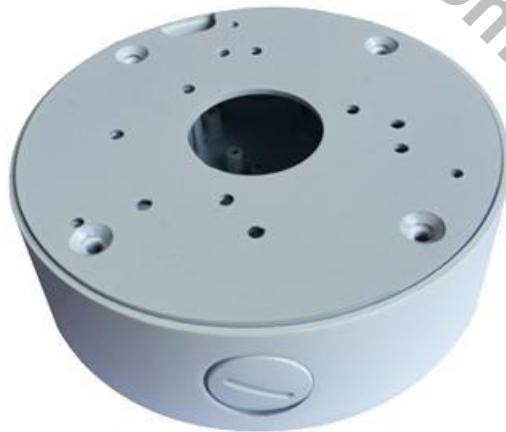

## Specification

Model No.	EZN368		
Pickup Device	Sony Progressive Scan CMOS sensor	Stream Type	Complex stream / Video stream
Lens	3.6mm fixed lens	Image Settings	Contrast, Brightness, Saturation, Sharpness, Mirroring of Images
Camera Angle Adjustment	Horizontal 360°, Vertical 90°	Intelligent Alarm	Video Loss, Network Anomaly, Tampering Alarm, Storage Exception, Motion Detection
Minimum Illumination	Color: 0.05Lux @ F1.4; B/W: 0.005Lux @ F1.4	Intelligent Analysis	Target Counting, Article-Inspecting, Region Detection, Virtual Cordon, Intelligent Motion Detection
Day/Night	True Day/Night with ICR	Event Trigger	Motion Detection
Iris	Fixed Iris	Notification	Email Notification
Electronic Shutter	Auto / Manual (1/25 ~ 1/10,000), FLK	Password Protection	Support
Video Compression	H.265 / H.264 / M-JPEG	Storage	Micro SD / SDHC slot (Max. 64G)
Max. Video Resolution	2048 x 1536	Alarm Input / Output	2 / 1
Frame Rate	25fps / 30fps	IR LED	15 Units
S/N Ratio	≥ 50db (AGC OFF)	IR Distance	30m / 100ft.
AGC	Yes	Power Supply	12VDC
AWB	Yes	Power over Ethernet	PoE IEEE 02.3af (Class 3)
T-WDR	Yes (120dB)	Max. Power Consumption	12VDC 3.5W / PoE 3.9W
Video Output	BNC 1.0Vp-p 75Ω	Humidity	0% ~ 90% not condensing
Audio Compression	G.711A / 64Kbps / Two-way audio	Operating Temperature	-20°C ~ 50°C / 14°F ~ 122°F
Interface	RJ-45 10M/100M adaptive	Dimensions (Φ) x (H)	186 x 71mm / 7.32" x 2.80"
Supported Protocols	TCP/IP, UDP, HTTP, DHCP, RTSP, DDNS, NTP, PPPOE, UPNP, SMTP, ONVIF	Weight	600g / 1.32lb
Connector	DC Jack, RJ-45, RS-485	Weather Resistance	IP66
Reset Button	Yes	Certificates	CE, FCC, RoHS

The information provided in this document is intended for informational purposes only and is subject to change without notice

### Find Out More At:

EverFocus Taiwan HQ:  
TEL: +886 2 2698 2334  
www.everfocus.com.tw  
marketing@everfocus.com.tw

EverFocus USA - California:  
TEL: +1 626 844 8888  
www.everfocus.com  
sales@everfocus.com

International Branch Offices:  
Germany, China, Japan

