


HD Fixed Focal (35mm)

HF35SR4A-SA1L

Applicable camera (model) 1 2/3 1/2 1/3 1/4 For Security

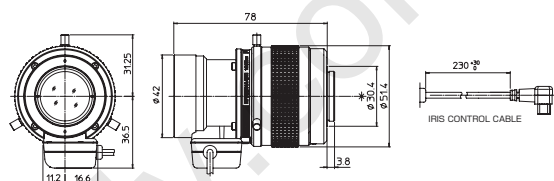


Unit : mm

HF35SR4A-SA1L		
Focal Length (mm)		35
Iris Range		F2.0 - T360
Operation	Focus	Manual
	Iris	Auto(DC Type)*1
Angle Of View (HxV)	2/3"	14°20' × 10°46'
	1/2"	10°27' × 7°51'
	1/3"	15°36' × 8°48'
Angle Of View (HxV) 16:9	2/3"	15°36' × 8°48'
	1/2"	11°22' × 6°25'
	1/3"	8°33' × 4°49'
Focusing Range (From Front Of The Lens)(m)		∞ - 0.75
Object Dimensions at M.O.D. (HxV)(mm) 4:3	2/3"	191 × 143
	1/2"	139 × 104
	1/3"	104 × 78
Object Dimensions at M.O.D. (HxV)(mm) 16:9	2/3"	208 × 117
	1/2"	151 × 85
	1/3"	114 × 164
Back Focal Distance (in air) (mm)		19.65
Exit Pupil Position (From Image Plane) (mm)		-74
Filter Thread (mm)		M40.5 × 0.5
Mount		C
Mass (g)		270
Coil Resistance		Drive Coil 190 Ω Damping Coil 1,150 Ω
Current Consumption		23mA(Max.) at DC 4V
Remarks		• With Metal Mount (*1) The iris automatically closes when the camera is turned off. HF35SR4A-1:Manual Iris Type

* Each of the above products is also available in long cable type (230 mm).

Wiring



Design for ITS use

< Object field >

	H (m) × V (m)
10.0 (m)	2.7 × 1.5
50.0 (m)	13.7 × 7.7
100.0 (m)	27.4 × 15.4

