


### HD Fixed Focal (50mm)

#### HF50SR4A-SA1L

Applicable camera (model) 1 2/3 1/2 1/3 1/4 For Security

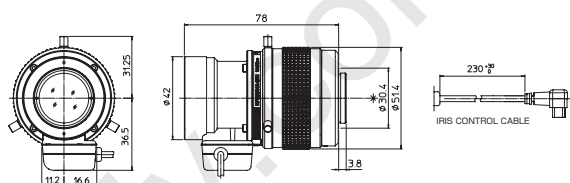


Unit : mm

HF50SR4A-SA1L		
Focal Length (mm)		50
Iris Range		F2.8 - T360
Operation	Focus	Manual
	Iris	Auto(DC Type)*1
Angle Of View (HxV)	2/3"	10°03' × 7°33'
	1/2"	7°19' × 5°30'
	1/3"	5°30' × 4°07'
Angle Of View (HxV) 16:9	2/3"	10°57' × 6°10'
	1/2"	7°58' × 4°29'
	1/3"	5°59' × 3°22'
Focusing Range (From Front Of The Lens)(m)		∞ - 1.0
Object Dimensions at M.O.D. (HxV)(mm) 4:3	2/3"	191 × 143
	1/2"	179 × 134
	1/3"	97 × 73
Object Dimensions at M.O.D. (HxV)(mm) 16:9	2/3"	195 × 109
	1/2"	142 × 80
	1/3"	106 × 60
Back Focal Distance (in air) (mm)		19.16
Exit Pupil Position (From Image Plane) (mm)		-484
Filter Thread (mm)		M40.5 × 0.5
Mount		C
Mass (g)		260
Coil Resistance		Drive Coil 190Ω Damping Coil 1,150Ω
Current Consumption		23mA(Max.) at DC 4V
Remarks		• With Metal Mount (*1) The iris automatically closes when the camera is turned off. HF50SR4A-1:Manual Iris Type

\* Each of the above products is also available in long cable type (230 mm).

#### Wiring



#### Design for ITS use

