



## Monitors

24" Public View Monitors

# BVM-24 Series

### Features:


- Built-in PIXIM WDR 690 HTVL-E camera with 2.8-12mm lens
- LED backlight reduces power consumption 40%
- Video motion detection enabled
- Integrated SD card reader
- 3D noise reduction & comb filter
- Easy access to built-in camera
- 4:3 aspect ratio
- 24VDC (19"+) Operation





# BVM-24 Series

# 24" Public View Monitors

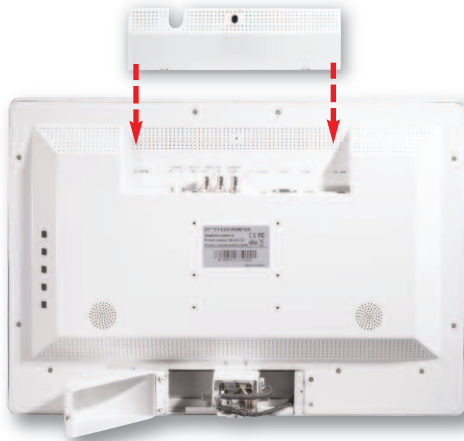

Input Panel (Cover Removed)



Input Panel (Cover Removed)



Camera Compartment (Door Open)

## ■ Specifications

Models:	BVM-24W-B (Black)	BVM-24W-W (White)
Screen Size	23.6" LED	
Resolution	1920 x 1080	
Brightness	300 cd / m <sup>2</sup>	
Contrast	1000:1	
Aspect Ratio	16:9	
Viewing Angle (H/V)	170° / 170°	
Response Time	5ms	
Video System	NTSC / PAL auto detection & OSD control	
Inputs	1 BNC, VGA, HDMI, S-Video, Audio (3.5mm), SD Card	
Outputs	2 BNC (loop out, camera out), Audio (RCA R/L)	
3D Noise Reduction	Yes	
3D Comb Filter	Yes	
Onboard Speakers	2 x 3W	
PIP / POP Option	Included	
Mounting	VESA 100 x 100mm	
Power / Consumption	24VDC / <45W	
Weight	17.9lbs (8.1kg)	
Dimensions	14.9"H x 21.8"W x 2.1"D (379mm H x 553mm W x 54mm D)	

Camera:	PIXIM WDR
Sensor	1/3" DPS Sensor
Focal Length	2.8-12mm
Resolution	690 HTVL-E
Minimum Illumination	0.1 lux
S/N Ratio	>50 dB (AGC Off)
WDR Control	Normal, Low, Medium, High
BLC	On / Off
AGC	Normal, Low, High
White Balance	AWB (2200-10000K)
SYNC Mode	Internal

All specifications are subject to change without notice

