




EA24A6-P9 Power Supplies

i3 Part# EA24A6-P9

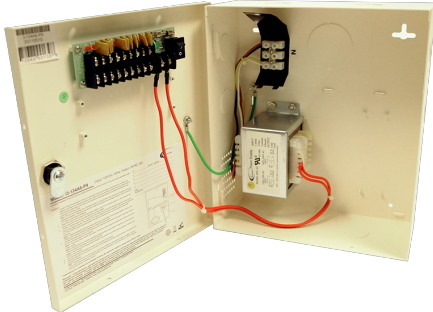

Features

- 120 VAC input, 24 VAC Output
- 12A Capacity
- 18 Outputs
- Input and Output Fuse Protection
- Power On/Off Switch
- Compatible with Cameras, Domes, and Pan/Tilts

Application & Benefits

The EA12DB-P9 offer by i3 International is an economical power supply giving 12VDC with 9 camera inputs. This power supply has an input of 120 VAC. It is packaged in an easy-to-install metal enclosure that has ample room for wiring connections and conduit entries.

Using any of i3 International camera series either alternative current or direct current, the EA12DB-P9 provide the DC power output for most cameras. This model come with PTC (Positive Temperature Coefficient) for each camera power output. PTC is a resettable fuse. As the temperature rises, nearing danger levels, the resistance increases, so less current flows, thereby protecting the vulnerable equipment that receives the current flow. Therefore, the EA12DB-P9 provide a high degree of protection for your cameras.

Specifications (EA24A6-P9):
Protection Device: 9 PTC (Positive Temperature Coefficient)
Maximum Amp: 2.0 Amp/channel
Color: Grey
Dimensions: 9.2 W x 3.9D x 10.4H / 235 mm x 100 mm x 265 mm
Weight: 8.8 lbs./ 4.0 kg
6 Amp Output
9 Camera Inputs



CANADA | 780 Birchmount Road, Unit 16, Scarborough, ON, M1K 5H4
USA | 1967 Wehrle Drive, Suite 1 Williamsville, NY, 14221

1.866.840.0004
www.i3international.com

©2014 i3International. The i3 logo is property of i3International Inc. All rights reserved. Specifications, configurations, components and options listed are subject to change without notice. T

For design help, accessories or pricing, please contact:
sales@avsupply or call: 1-858-565-1101



Distributed By: Audio Video Supply -- Tel: 1-800-284-2288 -- www.avsupply.com



EA24A6-P9 Power Supplies

i3 Part# EA24A6-P9

Specifications	
Indoor power supply	12 VDC with 9 PTC (2-ampere resettable fuse protection for each)
Camera Input	8.5A outputs for 18 cameras
Power Input	110-120V, 3.20A Current, 50/60Hz Frequency 200-240V, 1.50A Current, 50/60Hz Frequency
Dimensions	8.86 W x 3.5D x 10H / 225mm x 90 mm x 255mm
Weights	6.2 lbs./2.82kg
Construction	Steel
Finish	White polyester power coat
Environment	Indoor
Operating Temperature	32 to 120F (0 to 50C)
Ratings	Meets NEMA Type 1 standards

Distributed By: Audio Video Supply -- Tel: 1-800-284-2288 -- www.avsupply.com

CANADA | 780 Birchmount Road, Unit 16, Scarborough, ON, M1K 5H4
USA | 1967 Wehrle Drive, Suite 1 Williamsville, NY, 14221

1.866.840.0004
www.i3international.com

©2014 i3International. The i3 logo is property of i3International Inc. All rights reserved. Specifications, configurations, components and options listed are subject to change without notice. This data sheet may not be reproduced without permission.

For design help, accessories or pricing, please contact:
sales@avsupply or call: 1-858-565-1101