


ISD-F11

Ikegami

Pixim Seawolf Camera

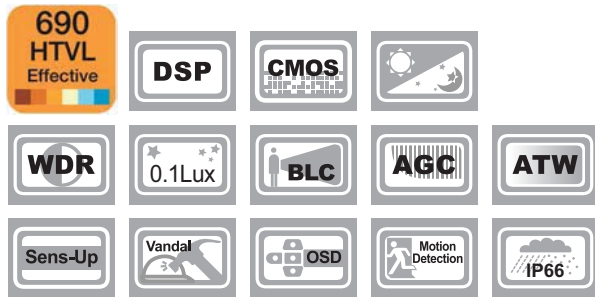

▲ ISD-F11

[Features]

- PIXIM 1/3" High Sensitivity Digital Sensor
- High Resolution : 690TVL Effective
- Min. Illumination : 0.1Lux
- Fixed Lens (2.5 mm)
- Sens-Up (2x~32x)
- Powerful WDR (Wide Dynamic Range)
- Digital Day & Night for surveillance 24 hours
- Private Masking (12 Zones)
- Motion Detection
- OSD for user convenience
- Digital Zoom (4x)
- Aluminum & Poly-Carbonated Material Housing (IP66)

[Specifications]

ITEM	NTSC	PAL
Power Consumption	12VDC Only (Max.150mA)	
Image Sensor	PIXIM 1/3" High Sensitivity Digital Sensor	
Effective Pixels	758(H) x 540(V)	
Dynamic Range	120dB(Max), 102dB(Typical)	
Horizontal Resolution	690TVL Effective	
Min. Illumination	0.1Lux	
Day & Night	Auto / Color / B/W	
White Balance	Auto / AWB / Indoor / Outdoor / Manual	
WB Range	2000°K~11,000°K	
Shutter Speed	up to 1/30, 720 sec	
Sens-up	Auto / Off (Selectable x2 ~ x32)	
Privacy Masking	12 Zones	
AGC	Low / Auto / High / Off	
Image Flip	Horizontal and Vertical	
Camera ID	On / Off	
S/N Ratio	More than 50dB	
Video Output	Composite video output 75 ohm terminated	
OSD	Builtin	
Sync. System	Internal / Line Lock	
Operating Humidity	30% ~ 90% RH	
Operating Temp.	10°C to 50°	

[Dimensions]

