

## ALSO/KEVIS CCTV CAMERA HOUSING SERIES



# DH-5140 SHBD

Kevis Outdoor Aluminum Die-Casting Housing

### DH SERIES

- IP68 Weather-proof, UV-Protected Plastic
- Vandal-proof Construction (Cable Management Bracket option)
- Side Open Design, IR LED (option)
- Various Built-in Module Options (PoE, EoC, PoC, Media Converter)
- Included Options : Sun Shield (S), Heater (H), Blower (B)

OPTION : KBR-080CC BRACKET

POSITIONING / PAN-TILT / IR PTZ / **HOUSING** / BRACKET / RACK / OTHERS

# KEVIS



### Specifications

Usage & Open Type	Indoor / Outdoor & Side Hinge Type
Options	Sunshield (S), Heater (H), Blower (B), Defroster (D) PoE(P), Gore Valve(G), IR LED Lamp(IR)
Body & Color	Aluminum with UV Protect Powder Coating & Cool Gray 1C
Power	AC 24V(20W) / AC115V(35W) / AC 230V(45W)
Typical Airflow	450Ml/MIN (Gore Valve)
Temperature of Use	DH-5140S : -15°C~+50°C DH-5140SHBD : -20°C~+50°C (Heater, Blower, Defroster)
Safety Certification	CE
IP Rating	IP68
External Dimensions (mm)	430mm x 146.2mm x 137mm
Internal Dimensions (mm)	267.6mm x 70mm x 75mm
Weight	2.6kg
Accessories	Spring and Flat Washer M6, Screw 1/4"-20X3/8" 2 ea

· IP68 (Ingress Protection, International Dustproof / Waterproof) is applied when installed and assembled correctly.

### Features

- IP68 Weather-proof, UV-Protected Plastic
- Vandal-proof Construction (Cable Management Bracket option)
- Side Open Design, IR LED (Option)
- Various Built-In Module Options (PoE, EoC, PoC, Media Converter)
- Included Options : Sun Shield (S), Heater (H), Blower (B)

### Model Options

1. DH-5140S (Sun Shield)
2. DH-5140SH (Sun Shield, Heater)
3. DH-5140SHB (Sun Shield, Heater, Blower)
4. DH-5140SPB (Sun Shield, Heater, Blower, PoE Module)


### Product Inside



- DH-5100 Side Opening Aluminium Housing series is designed to protect the camera from water and dust at the installation site, as well as provide easy installation and service. It is also made of the highest quality aluminium materials using die castings to maximize durability and reliability.

### Drawings


UNIT(mm)

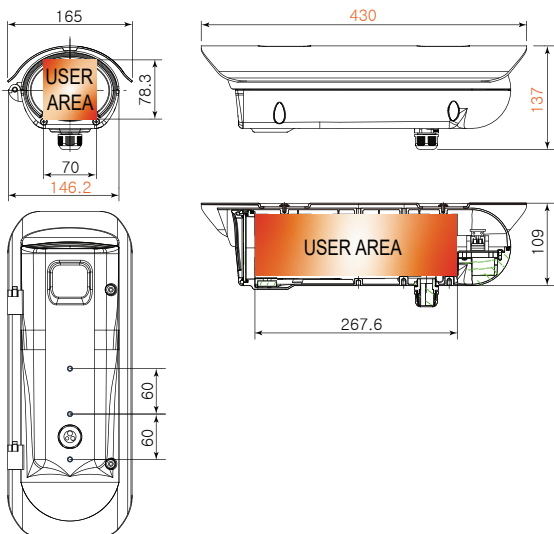

※ Designs and Specifications may differ from the latest products, please contact our sales for the update.

### Accessories


| KBR-080CC | Wall Mount



### Specifications

Material	Aluminum
Weight	1.2kg
Max. Loading	15kg
Color	Cool Gray 2C
Pan/Tilt	360° / 90°
Dimensions	233.5x172x73

| KBR-1000 | Wall Mount

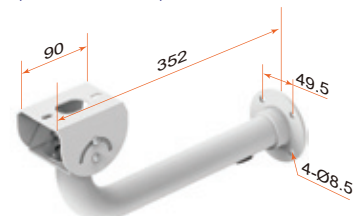

### Specifications

Material	Aluminum
Weight	1 kg
Max. Loading	15kg
Color	Cool Gray 2C
Pan/Tilt	360° / 90°
Dimensions	352 x 184.5 x 89

UNIT(mm)