

ALSO/KEVIS CCTV CAMERA HOUSING SERIES



FH-5140 HB

Kevis Indoor/Outdoor Aluminum Housing

FH Series

- Wether-proof Aluminum Housing
- IP55 Rated, Side Open Design
- IR LED (Option)
- Smart Heater/FAN (Option)
- Included Options : Sun Shield (S), Heater (H), Blower (B)

OPTION : KBR-060CC BRACKET

POSITIONING / PAN-TILT / IR PTZ / HOUSING / BRACKET / RACK / OTHERS

KEVIS



Specifications

Usage & Open Type	Indoor/Outdoor & Side Hinge Type
Options	Heater (H), Blower (B) IR LED Lamp(IR)
Body & Color	Aluminum 6063 UV Protect Powder Coating & Cool Gray 1C
Power	Heater & Blower : 24V / 110V / 230V
Temperature of use	FH-5140 : -15°C~+50°C FH-5140HB : -40°C~+50°C (Heater, Blower)
Safety certification	CE
IP Rating	IP55
Dimension (Out side) mm	144(w) x 111(h) x 460(d)
Dimension (In side) mm	100(w) x 80(h) x 310(d)
Weight	1.5kg
Accessories	Spring and Flat Washer M6, Screw 1/4"-20X3/8" 3ea

※ Designs and Specifications may differ from the latest products, please contact our sales for the update.
· IP55 (Ingress Protection, International Dustproof / Waterproof) is applied when installed and assembled correctly.

Features

- Wether-proof Aluminum Housing
- IR LED (Option)
- Smart Heater/FAN (Option)
- IP55 Rated, Side Open Design
- Included Options : Sun shield (S), Heater (H), Blower (B)

Model Options

1. FH-5140H (Heater)
2. FH-5140HB (Heater, Blower)


Product Inside



Dimensions


MODEL	Outside (mm)	Inside (mm)	Weight(kg)
FH-5140	144(w) x 100(h) x 437(d)	100(w) x 80(h) x 330(d)	1.5
FH-5140H	144(w) x 100(h) x 437(d)	100(w) x 80(h) x 330(d)	1.8
FH-5140HB	144(w) x 100(h) x 467(d)	100(w) x 80(h) x 360(d)	2

Drawings

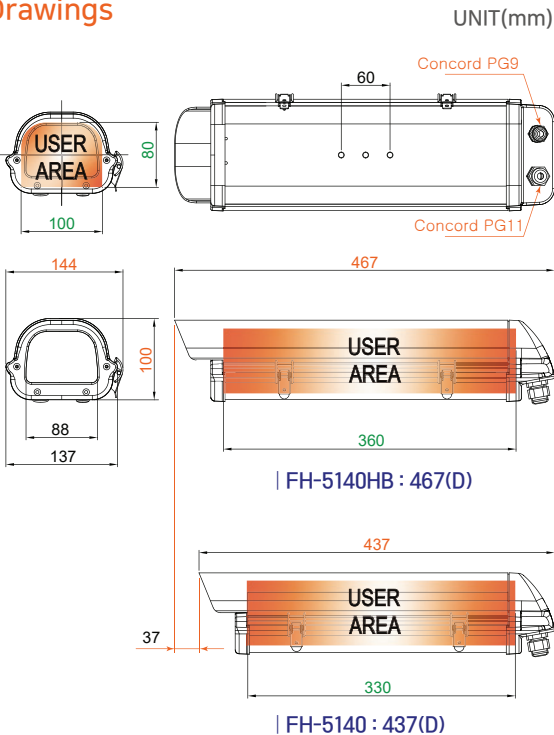

Accessories

| KBR-060CC | Wall Mount

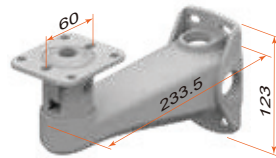


Specifications

Material	Aluminum
Weight	1.2kg
Max. Loading	15kg
Color	Cool gray 2C
Pan/Tilt	360° / 90°
Dimensions	233.5x145.5x75

※ Replaceable with PTB-100 model

| KBR-1000 | Wall Mount

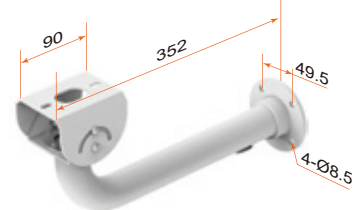

Specifications

Material	Aluminum
Weight	1kg
Max. Loading	15kg
Color	Cool gray 2C
Pan/Tilt	360° / 90°
Dimensions	352 x 184.5 x 89

※ Replaceable with KBR-2000~5000 models