



INNOVATIVE
HIGH DEFINITION SURVEILLANCE



OMNI EZ HD TVI

 **KEZ-c2DR28V1 2IR**

1080p HD Over Regular Coax or UTP
Outdoor, IR Dome: True Day/Night, OSD, 2.8-12mm
IP68, 66' Smart IR Range, -40°, Dual Voltage

KEZ-c2DR28V12IR: 2.8-12mm

KEZ-c2DR28V1 2IR



Day/Night	mm	DNR	3-AXIS	TVI	BLC HLC	DC12 Dual Voltage AC24V	Service Video
Digital WDR	Direction Liner	IP68 Waterproof	100' Smart IR Range	OSD	Privacy Mask	Rugged Housing	-40°F
Electrical Box Mount Option							


1080p HD Over Regular Coax or UTP
Outdoor, IR Dome: True Day/Night, OSD, 2.8-12mm
IP68, 66' Smart IR Range, -40°, Dual Voltage

Features


- Superlative HD resolution of 1080p Full HD or 720p HD for amazing image quality and
 - Useful digital zoom on live view and playback
 - Field select 1080p or 720p
 - Field select 30/25 Hz or 60/50 Hz
- Operation over 'almost any' wire
 - More than 1000 feet on standard RG59 coax
 - More than 1500 feet on RG6
 - More than 500 feet on UTP (one pair from a Cat5e cable, using optional KA-HDBAL1 balun pair).
- HD-TVI HD BNC main output
- CVBS analog service video output inside housing
 - Use standard hand held test monitors
- - Convenient aim and focus; ease of service
- 1/3" Sony progressive scan CMOS sensor with .5 lux native light sensitivity
- Varifocal Aspheric 2.8~12mm 2 Megapixel lens to capture the desired field of view
- True Day/Night zero light operating range of 66 feet or more (depending on scene reflectivity) from 24 IR LEDs
- Smart IR automatic exposure level adjust to achieve the desired IR brightness despite reflections & bright spots
- Simple and easy to use OSD setup menu
 - Local 3-axis joystick inside access cover
 - Up-the-cable control from OMNI EZHD recorders (or other compatible Coaxitron® control equipment)
 - Digital slow shutter (Sens-Up) low light enhancement
 - Digital Wide Dynamic Range to handle the most challenging of bright or unbalanced lighting conditions
 - Programmable Back Light Compensation (BLC) and Highlight Suppression Back Light Compensation (HSLC)
 - Adjustable 3D Noise Reduction to increase low light picture clarity and conserve DVR HDD disk space
 - Privacy masking for 8 configurable zones
 - Lens shading compensation for even exposure out to the lens periphery
 - Defog improves image contrast in the presence of haze or smoke that obscures image details
 - Image H/V flip and rotate, digital zoom and more
- Dual voltage 24VAC/12VDC operation with low current draw
- IP68 water proof, vandal proof construction
- Operating temperature range of -40°F~140°F
- Easy mounting using 3-Axis positioning for convenient wall or ceiling mounting
 - Optional KA-RCMP1 for mounting to standard electrical boxes
 - Optional KA-RCWM1 wall mounting arm

*DSS levels above 4X should be used only after careful consideration of scene dynamics

Dimensions (Unit: mm)

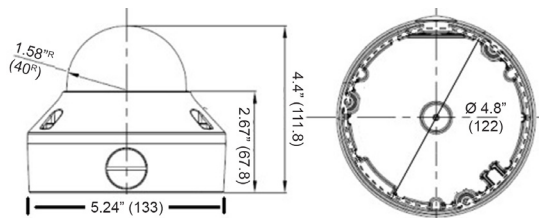

Accessories:



KA-RCMP1
Optional
Electrical Box
Mounting Plate

Technical Specifications

Imaging Device	1/3" Sony 2.1Mp Progressive Scan CMOS
Video Format	Main Output: 1080p30/25, 720p60/50 HD-TVI (OSD selectable) Secondary Output: CVBS (OSD selectable NTSC/PAL) service video test point
Picture Elements	1984 (H) x 1105 (V)
Effective Picture Elements	1920 (H) x 1080 (V)
Horizontal Resolution	More than 1080 HTVL (in 1080p mode)
Sensitivity	0 lux IR on: .5 lux @ F1.6 (AGC On)
Day/Night Type	True Day/Night with ICR motorized filter control
Lens Type	2 Megapixel Varifocal Type 2.8~12mm F=1.6 IR corrected
IR LED	24 Smart IR LEDs, 850nm
IR Range†	66' / 20m
Smart IR Exposure Adjust	Active when IR enabled: Off/Low/Mid/High
Video Output Connector Type	TVI and CVBS: BNC 75Ω Test Video: CVBS video test point inside access cover, cable to BNC supplied
Sync. Mode	Internal
OSD Menu	Multiple functions using 3-axis joystick inside housing; UTC Control
OSD Languages	English, Spanish, Portuguese, German, Russian, Japanese, French
UTC Control	Full OSD Menu access via up-the-cable (Coaxitron® type) signaling
WDR / BLC / HSLC	OFF/WDR/BLC/HSLC Selectable Adjustable for Level 1~10; also BLC area, HLC color.
Auto Gain Control	OFF; 2~42dB
Electronic Shutter	Auto; FLK; or Manual 1/30 (25) to 1/30,000
White Balance	Auto / Push Lock / Manual
Color Correction	Gamma 0.45~.65, adjustable
Day & Night	Auto True D/N with motorized ICR, controlled by photo sensor. Optional color-only and B/W only modes under OSD control
Sens-Up	DSS low light boost Off/Auto 2X~16X*
3D-DNR	Off/Low/Mid/High
Digital Zoom	1X~8X
Defog	Off/Low/Mid/High
Mirror	Off / H-flip, V-flip, rotate
Motion Detection	Off/On for programmable zone with sensitivity adjust (pixel change detection)
Privacy Mask	Off/On with full programmability for 8 selectable zones
Lens Shading Compensation)	Off/Low/Mid/High
DPC (Defective Pixel Correction)	Off/On
Other OSD Functions	Camera Title with position, Font Color; Image Sharpness
Power Source	12VDC/24VAC
Power Consumption	12VDC: 350mA, 24VAC: 4W (IR LED On)
Operating Temperature	-40 °F ~ 140 °F (-40 °C ~ 60 °C)
Environmental	IP68 water proof
Mechanical	Vandal proof metal construction
Positioning	3-axis flexible positioning for wall or ceiling mounting
Dimensions	Ø5.24" × 4.4" [Ø133 × 111.8mm]
Weight	1.63 lbs./.74 Kg
Mounting Options	Electrical box adapter: KA-RCMP1; Wall mount arm with ring: KA-WM101
Certifications	CE / FCC / RoHS

KEZ-c2DR28V1 2IR: 2.8-12mm

†As with all IR cameras, IR range will vary based on scene IR reflectivity and illumination
KT&C America reserves the right to make changes to improve our products at any time without notice; we are not responsible for misprints.