



KPC-LD40NU

750TVL Low Profile Dome Camera

www.ktncusa.com

- 750TVL Horizontal Resolution
- f = 3.6 mm Board Lens
- Min. Illumination of 0.1 Lux (30 IRE)
- Digital Day & Night
- 3D DNR / AWB / AGC / DSS / WDR
- 1/3" 960H Double Scan Super HAD CCD II
- DC 12 V / AC 24 V Dual Power

Resolution
960

For design help, accessories or pricing, please contact:
sales@avsupply or call: 1-858-565-1101

AUDIOVIDEO SUPPLY
1-800-284-2288 sales@avsupply.com
www.avsupply.com






Resolution 960

- 750TVL Horizontal Resolution
- f = 3.6 mm Board Lens
- Min. Illumination of 0.1 Lux (30 IRE)
- Digital Day & Night
- 3D DNR / AWB / AGC / DSS / WDR
- 1/3" 960H Double Scan Super HAD CCD II
- DC 12 V / AC 24 V Dual Power



General Feature Diagram Unit: (inch)

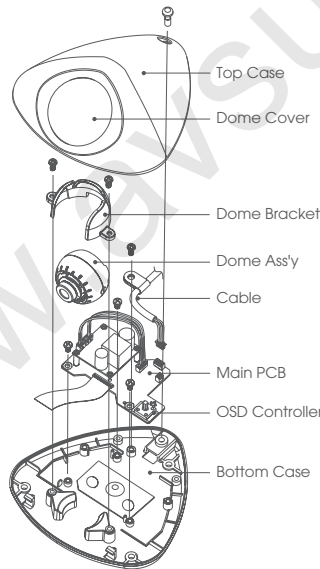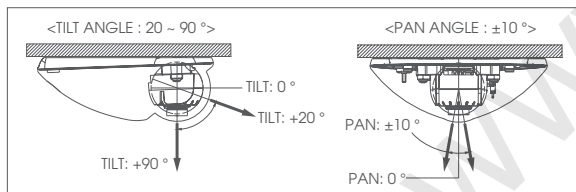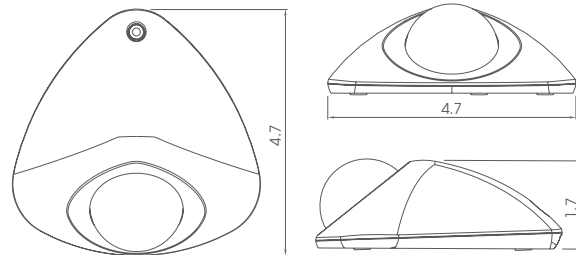

Digital Noise Reduction

The amount of low luminance noise is remarkably reduced and signal to-noise ratio (S/N) as well as horizontal resolution is improved, resulting in a clear and sharp image display even in dark condition.

For design help, accessories or pricing, please contact:
sales@avsupply or call: 1-858-565-1101

KPC-LD40NU

750TVL Low Profile Dome Camera



Technical Specification

Signal System	NTSC	
Image Sensor	1/3" 960H Double Scan Super HAD CCD II	
Scanning System	2:1 Interlace	
Horizontal Resolution	750TV Lines	
Scanning Frequency	15.734 KHz x 59.94 Hz (H x V)	
Total Pixels	Effective Pixels	1020 x 508 (H x V) 976 x 494 (H x V)
Synchronization	Internal	
Lens	3.6 mm	
Lens Type	Fixed Board Lens	
S/N	More than 50dB (3DNR On)	
Gamma	r = 0.45	
Min. Illumination	0.1 Lux (30 IRE@F2.0, AGC: 36dB), 0.000001 Lux (DSS: x256)	
Shutter Speed	1/60 ~ 1/100,000 sec	
Day & Night	Digital Day & Night	
Day & Night Function	Auto, Color, B/W	
IP Rating	N/A	
Video Output Level	1.0 Vp-p Composite (75 Ω)	
On-Screen Display (OSD)	Built-in with Joystick	
BLC	On / Off (Level adjustment, Area selection)	
DNR	2D / 3D DNR (Level adjustable)	
White Balance	ATW, Push, User1, User2, Anti CR, Manual, Push-lock	
Privacy Masking	15 Zones (Area adjustment)	
Mirror	Image reverse (Normal / Flip)	
Motion Detection	4 Zones (Level adjustable, Area adjustment)	
WDR	On / Off (Level adjustable)	
Digital Zoom Ratio	3x	
Digital Slow Shutter	Off, 2 ~ 256 Field	
Other Function	Freeze, Contrast, Sharpness	
Language Option	English, Japanese, German, French, Russian, Portuguese, Spanish, Chinese	
Operating Temperature	14 °F ~ 122 °F (-10 °C ~ 50 °C)	
Storage Temperature	-4 °F ~ 140 °F (-20 °C ~ 60 °C)	
Humidity	Less than 80% RH	
Power Supply	DC 12 V (±10%), Max. 190 mA / AC 24 V (±10%), Max. 2.5 W	
Dimension	Weight	4.7 x 4.7 x 1.7 inch (119 x 119 x 42 mm) 0.4 lbs (200 g)