


|     |                        |    |
|-----|------------------------|----|
| REV | CHANGE RECORD AND DATE | CH |
|-----|------------------------|----|

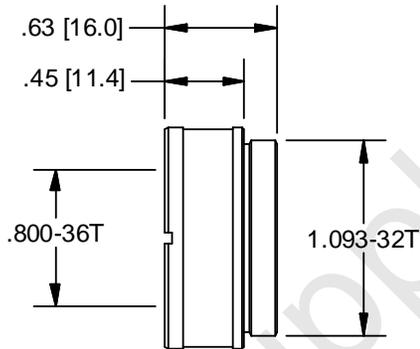

## OUTLINE

USED ON:

|           |   |   |   |                                     |
|-----------|---|---|---|-------------------------------------|
| MATERIAL: | UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES AND INCLUDE CHEMICALLY APPLIED OR PLATED FINISHES   | <u>P/N SUFFIX DEFINITION</u><br>-1 CONVERSION COATING<br>-2 PAINTING<br>-3 MARKING<br>-R REWORK | THE CONTENTS OF THIS DOCUMENT ARE PROPRIETARY TO NAVITAR, ITS USE IS AUTHORIZED ONLY FOR RESPONDING TO REQUEST FOR QUOTATION OR PERFORMANCE OF WORK FOR NAVITAR |                                     |
|           | TOLERANCES AS FOLLOWS<br>DEC. .XXX ± .005<br>DEC. .XX ± .010<br>FRACT. ± 1/64<br>ANGLES ± 30'<br>CONCENTRICITY .003 TIR<br>BREAK ALL SHARP EDGES<br>.005 MIN. .010 MAX.<br>MAX. SURF. ROUGHNESS: 32 | SCALE: 1:1  | 0.0 inch 1.0<br>0.0 mm 25.0   |                                     |
| FINISH:   | CHAMFER ALL THREADS 30° TO ROOT DIAMETER  | DR: PODLENA   |   | STANDARD OBJECTIVE COUPLER ASSEMBLY |
|           |   | CH:   |   |                                     |
|           |   | APP:  | SIZE  | 2-50026 01 REV                      |
|           |   | DATE DR: 6/11/2002  | A   | SH                                  |
|           |   | DO NOT SCALE DRAWING  |   |                                     |

For design help, accessories or pricing, please contact:  
sales@avsupply or call: 1-858-565-1101

1-800-284-2288 sales@avsupply.com  
www.avsupply.com