

FRS324104S00

Two Channel Video and Data Receiver


FRS324104R00-032009

3000 Series

PRODUCT SPECIFICATION



Standalone

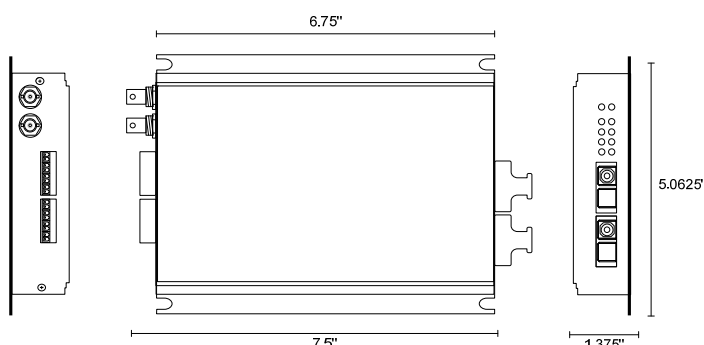

Description

Nitek's **FRS324104S00** is a two channel video and data, Universal-Mode™ receiver. The system requires a single fiber per channel. Both video and data are transmitted over the same fiber channel. Nitek's unique Universal-Mode™ optics allow the unit to be used with single-mode or multi-mode fiber optic cabling types.

The **3000 Series** fiber optic transmission systems are designed to provide point-to-point, broadcast quality video transmission at an affordable cost, without compromise. The video is transmitted in a real time full bandwidth digital format. This insures the highest quality regardless of distance. By transmitting the video in an uncompressed format, there is no latency or loss of video quality.

An Automatic Gain control feature built into the **3000 Series** compatible receivers making this a "plug-and-play" video system, requiring no field setup or adjustments. The receivers are equipped with LED indicators which provide an at-a-glance operating and optics state.

The **3000 Series** 10 bit digital technology combined with ease of installation and inherent reliability have made this the system of choice for many critical applications.

Features

- Real time 10 Bit digital video eliminates signal degradation associated with distance.
- Automatic Gain control minimizes setup and adjustment time.
- Switchable P/T/Z data interface allows interfacing with a wide range of manufacturers' protocols.
- Universal-Mode™ allows the same unit to be used with multi-mode or single-mode fiber without any set up. Wide dynamic range. Provides "broadcast quality" video transmission.
- Directly supports all NTSC, PAL or SECAM video formats.
- Compatible 3000 Series Receivers are equipped with front panel LED status indicators to provide at-a-glance diagnostics of the systems video and optics state.
- Broad operating temperature range for use in protected outdoor applications outdoor applications.

Ordering Information

Fiber Type	Part #	Compatible Transmitter	# Fibers	Loss Budget	Connector	Max Distance
Multi-Mode 62.5/125µm	FRS324104S00	FTS312104S00	2	20dB	SC-PC	Multi-Mode Fiber 6,500 ft (1.2 miles)
		FTS324104S00				
Single Mode 9/125 µm		FTS324104R00				Single-Mode Fiber >130,000 ft (24.5 miles)
Description	FRS324104S00 Video and Data Receiver					
Accessories						

NITEK®



USA

5410 Newport Drive, # 24
Rolling Meadows, IL 60008
Phone: (847) 259-8900
Fax: (847) 259-1300
E-mail: info@nitek.net
WWW.NITEK.NET

FRS324104S00

Two Channel Video and Data Receiver

FRS324104R00-032009

TECHNICAL SPECIFICATION

Video

Compression	None, Uncompressed
Input / Output Level	1V p/p nominal
Input / Output Impedance	75 Ohm Unbalanced
Frequency Response	10Hz to 5.75Mhz
Differential Gain	1%
Differential Phase	1°
Signal to Noise Ratio	67dB minimum
Fiber Connector	SC- PC
Video Connection	BNC
Video Standard	NTSC/PAL

Data

Data interface	RS232, RS422 (full duplex, two wire) RS485 (half duplex, two wire) Slide switch selectable
Data rate per channel	Up to 512kb/s

Auxiliary Communication

Bi-directional contact closure/alarms	
Alarm in	Contact/relay in
Alarm out	100V / 150mA max.

Audio

Not Available in 3000 Series	See 5000 Series
------------------------------	-----------------

Ethernet

Not Available in 3000 Series	See 5000 Series
------------------------------	-----------------

Optical

Accepts both multi- and single-mode fiber	
Multi-mode	50/125 or 62.5/125
Single-mode	9/125
Wavelength	1310nm
Optical Connector	SC-PC
Path Loss	20dB min.

General


Operating Temperature	-40° to 165° Fahrenheit
Operating Humidity	0 to 95% non-condensing
Power Requirements	+12VDC to +24VDC ac/dc 1.5 Watts

Mechanical

Height	4.330"
Width	1.375"
Depth	6.770"

In our continued effort to "Bridge the Gap in Technology", product specifications are subject to change without notice.

System Design

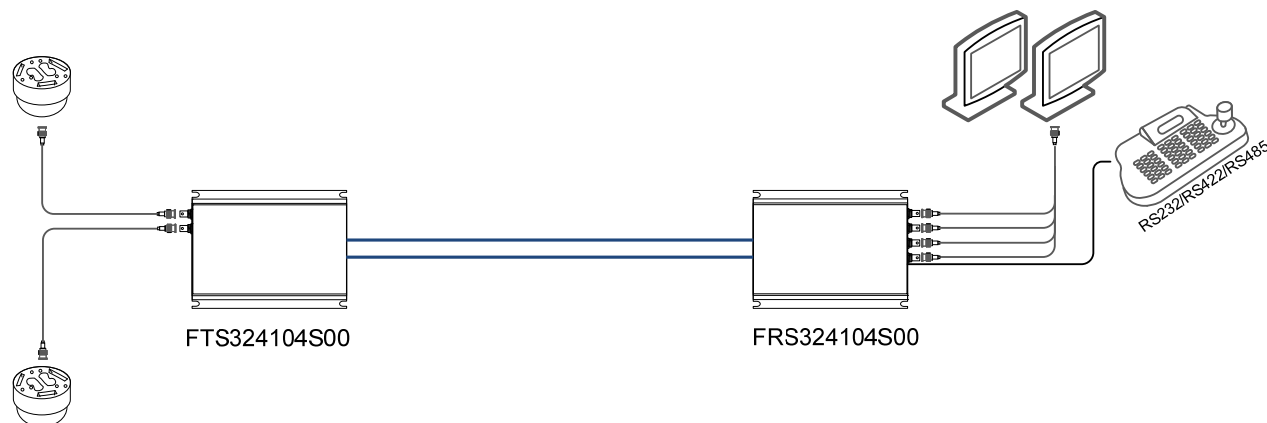

NITEK®



USA

5410 Newport Drive, # 24
Rolling Meadows, IL 60008
Phone: (847) 259-8900
Fax: (847) 259-1300
E-mail: info@nitek.net
WWW.NITEK.NET