

# FRS344000S00


## Four Channel Video Only Receiver

FRS344000S00-032009

### 3000 Series



### Standalone

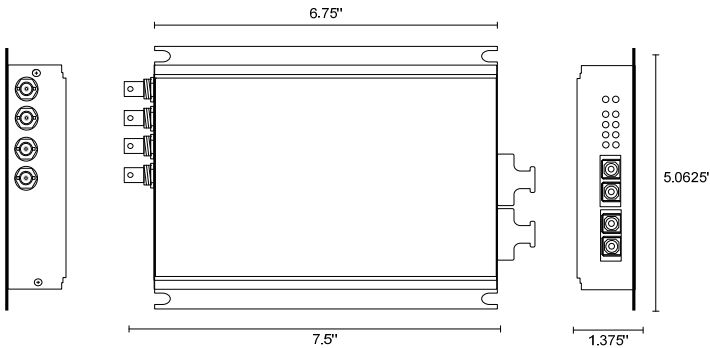

### Description

Nitek's **FRS322000S00** is a four channel video only Universal-Mode™ receiver. The system requires a single fiber per channel. Nitek's unique Universal-Mode™ optics allow the unit to be used with single-mode or multi-mode fiber optic cabling types.

The **3000 Series** fiber optic transmission systems are designed to provide point-to-point, broadcast quality video transmission at an affordable cost, without compromise. The video is transmitted in a real time full bandwidth digital format. This insures the highest quality regardless of distance. By transmitting the video in an uncompressed format, there is no latency or loss of video quality.

An Automatic Gain control feature built into the receivers makes this a "plug-and-play" video system, requiring no field setup or adjustments. The receivers are equipped with LED indicators which provide an at-a-glance operating and optics state.

The **3000 Series** 10 bit digital technology combined with ease of installation and inherent reliability have made this the system of choice for many critical applications.

### Features

- Real time 10 Bit digital video eliminates signal degradation associated with distance.
- Automatic Gain control minimizes setup and adjustment time.
- Universal-Mode™ allows the same unit to be used with multi-mode or single-mode fiber without any set up or field configuration.
- Wide dynamic range. Provides "broadcast quality" video transmission.
- Receivers are equipped with front panel LED status indicators to provide at-a-glance diagnostics of the systems video and optics state.
- Directly supports all NTSC, PAL, or SECAM video formats.
- Broad operating temperature range for use in protected outdoor applications.

### Ordering Information

Fiber Type	Part #	Compatible Transmitter	# Fibers	Loss Budget	Connector	Max Distance
Multi-Mode 62.5/125µm	FRS344000S00	FRS344000S00	4	20dB	SC-PC	Multi-Mode Fiber 6,500 ft (1.2 miles)
Single Mode 9/125 µm		FRS344000R00				Single-Mode Fiber >130,000 ft (24.5 miles)
Description	FRS322000S00 Video Receiver					
Accessories						

# NITEK®



USA

5410 Newport Drive, # 24  
Rolling Meadows, IL 60008  
Phone: (847) 259-8900  
Fax: (847) 259-1300  
E-mail: [info@nitek.net](mailto:info@nitek.net)  
[WWW.NITEK.NET](http://WWW.NITEK.NET)

PRODUCT SPECIFICATION

**Video**

Compression	None, Uncompressed
Input / Output Level	1V p/p nominal
Input / Output Impedance	75 Ohm Unbalanced
Frequency Response	10Hz to 5.75Mhz
Differential Gain	1%
Differential Phase	1°
Signal to Noise Ratio	67dB minimum
Fiber Connector	SC-PC
Video Connection	BNC
Video Standard	NTSC/PAL

**Data**

Bi-Directional Data available	3000 Series
-------------------------------	-------------

**Auxiliary Communication**

Auxiliary Communication available	3000 Series
-----------------------------------	-------------

**Audio**

Not Available in 3000 Series	See 5000 Series
------------------------------	-----------------

**Ethernet**

Not Available in 3000 Series	See 5000 Series
------------------------------	-----------------

**Optical**

Accepts both multi- and single-mode fiber	
Multi-mode	50/125 or 62.5/125
Single-mode	9/125
Wavelength	1310nm
Optical Connector	SC-PC
Path Loss	20dB min.

**General**

Operating Temperature	-40° to 165° Fahrenheit
Operating Humidity	0 to 95% non-condensing
Power Requirements	+12VDC to +24VDC ac/dc 1.5 Watts

**Mechanical**

Height	4.330"
Width	1.375"
Depth	6.770"

In our continued effort to "Bridge the Gap in Technology", product specifications are subject to change without notice.

**System Design**