

ORION®**OIC®** ORION IMAGES
CORPORATION

SPECIALIZING IN LCD / LED MONITORS

LED**ULTRA BRIGHT LED****15RTCLD****BUILT TO RUN 24 X 7 X 365 CONTINUOUSLY**

OVERVIEW

The ORION Images LCD w/ LED BLU (backlight unit) 15 inch 15RTCLD Ultra Bright LED displays are a truly professional experience in next generation technology using eco-friendly material (no mercury or halogen). This technology exceeds the NTSC color gamut standard of 100% with the LED BLU at 123% to provide a wider range of colours than ever before - you will see colors on screen as you see them in real world.

FEATURES

- » Metal Chassis
- » Ultra High Brightness LED Monitor
- » 1000Nit Brightness, 2500:1 Aspect Ratio
- » 3D Comb Filter, Deinterlace, Noise Reduction, LED High Brightness BLU, Multi-Language Support
- » BNC Video 2 In / 2 Out, S-Video 1 In / 1 Out, VGA 1 In, Audio 1 In, PC Stereo 1 In
- » 1W x 2 Built-In Speakers
- » Wall and Rack Mount Kit

GSA

Contract No. GS-03F-0152X



For design help, accessories or pricing, please contact:
sales@avsupply or call: 1-858-565-1101



Distributed By: Audio Video Supply -- Tel: 1-800-284-2288 -- www.avsupply.com

AUDIOVIDEO SUPPLY
1-800-284-2288 sales@avsupply.com
www.avsupply.com

15RTCLD

ULTRA BRIGHT LED MONITOR


SPECIFICATIONS

15RTCLD	
Display	
Screen Size	15 Inch
Max. Resolution	1024 x 768 @ 75Hz
Pixel Pitch	0.297 x 0.297mm
Brightness	1000cd/m ²
Contrast Ratio	2500 : 1
Aspect Ratio	4 : 3
Viewing Angle (H/V)	160° / 130°
Display Color	16.2 Million
Response Time	< 8ms
Video System	NTSC / PAL
Interface	
Video In / Out (BNC Type)	2 In / 2 Out
HDMI In	1 In
S-Video In / Out	1 In
VGA In (15Pin D-Sub)	1 In
Audio In (RCA Type)	1 In
PC Stereo In	1 In
Transmitter	
Remote Control	Yes
Audio	
Built-in Speakers	Yes (1W x 2)
Features	
Filter Type	3D Comb Filter
Deinterlacing	Yes
Noise Reduction Control (NR)	Yes
LED High Brightness BLU	Yes
Auto Source Sequencing	Yes
Multi Language	English, Spanish, French, German, Italian
General	
Outline Dimension	13.66" W x 11.65" H x 3.19" D
Net Weight	4.79Kg (10.58lbs)
Material / Color	Electronic galvanized iron / Black
Desk Top Stand	Tilt Back
Part / Labor	2year / 2year
Consumption: < On	< 35W
	AC100 ~ 240V(50/60Hz)
Electrical Ratings	DC12V / 3A
Operating Temperature	0 ~ 40° C / 32 ~ 104° F
Storage Temperature	-20 ~ 60° C / -4 ~ 140° F
Mounts	
VESA™ Mount Size	100 x 100mm
Wall	WB-5, WB-10, WB-30, WB-31
Ceiling	CMK-01
Rack	RMK-08

*Design and specifications are subject to change without notice


ULTRA BRIGHT LED

ORION LED BLU (backlight unit) high brightness displays technology exceeds the NTSC color gamut standard of 100% with the LED BLU at 123% to provide a wider range of colours than ever before – you will see colors on screen as you see them in real world.

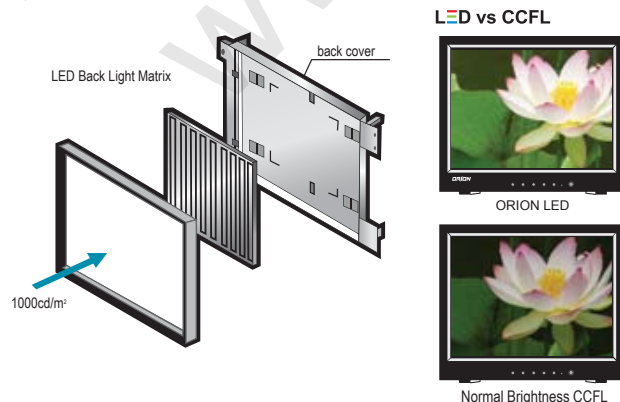


LED vs CCFL

INPUT INTERFACE

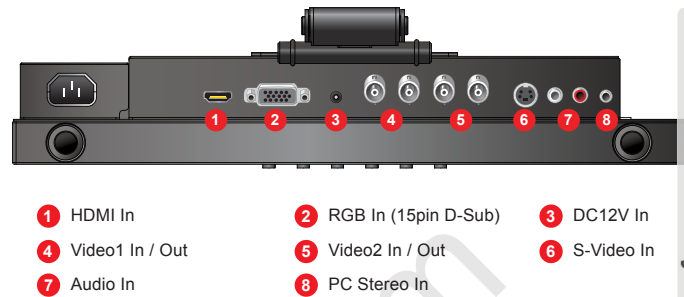

DIMENSIONS

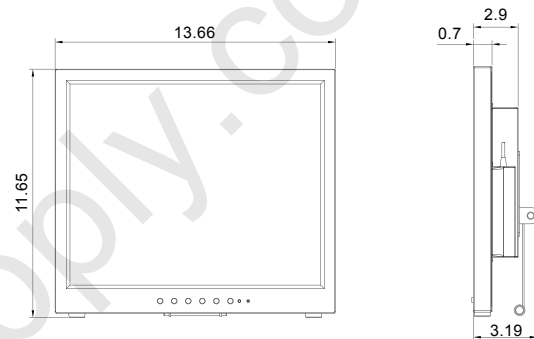

OTHER PRODUCT VIEW



OPTIONAL MOUNTS



Distributed By: Audio Video Supply -- Tel: 1-800-284-2288 -- www.avsupply.com