


**ORION**<sup>®</sup>

**OIC**<sup>®</sup> ORION IMAGES CORPORATION

SPECIALIZING IN LCD / LED MONITORS

**LED**

**ULTRA BRIGHT LED**



**17RTCLD**

BUILT TO RUN 24 X 7 X 365 CONTINUOUSLY

## OVERVIEW

The ORION Images LCD w/ LED BLU (backlight unit) 15 inch 15RTCLD Ultra Bright LED displays are a truly professional experience in next generation technology using eco-friendly material (no mercury or halogen). This technology exceeds the NTSC color gamut standard of 100% with the LED BLU at 123% to provide a wider range of colours than ever before - you will see colors on screen as you see them in real world.

## FEATURES

- Metal Chassis
- Ultra High Brightness LED Monitor
- 1200nit Brightness, 1000:1 Contrast Ratio
- 3D Comb Filter, Deinterlace, Noise Reduction, LED High Brightness BLU, Multi-Language Support
- BNC Video 2 In / 2 Out, S-Video 1 In / 1 Out, VGA 1 In, Audio 1 In, PC Stereo 1 In
- 1W x 2 Built-In Speakers
- Wall and Rack Mount Kit



GSA Contract No. GS-03F-0152X

For design help, accessories or pricing, please contact:  
sales@avsupply or call: 1-858-565-1101

**AUDIOVIDEO SUPPLY**  
1-800-284-2288 sales@avsupply.com  
www.avsupply.com

Distributed By: Audio Video Supply -- Tel: 1-800-284-2288 -- www.avsupply.com

# 17RTCLD


## ULTRA BRIGHT LED MONITOR

### SPECIFICATIONS

17RTCLD	
<b>Display</b>	
Screen Size	17 Inch
Max. Resolution	1280 x 1024 @ 75Hz
Pixel Pitch	0.297 x 0.297mm
Brightness	1200cd/m <sup>2</sup>
Contrast Ratio	1000 : 1
Aspect Ratio	5 : 4
Viewing Angle (H/V)	170° / 160°
Display Color	16.7 Million
Response Time	< 5ms
Video System	NTSC / PAL
<b>Interface</b>	
Video In / Out (BNC Type)	2 In / 2 Out
S-Video In	1 In
HDMI In	1 In
VGA In (15Pin D-Sub)	1 In
Audio In (RCA Type)	3 Left & Right
PC Stereo In	1 In
<b>Transmitter</b>	
Remote Control	Yes
<b>Audio</b>	
Built-in Speakers	Yes (1W x 2)
<b>Features</b>	
Multi Display Function	PIP / PBP
Filter Type	3D Comb Filter
Advanced Auto Power Recovery	Yes
Deinterlacing	Yes
Noise Reduction Control (NR)	Yes
Auto Source Sequencing	Yes
Multi Language	English, Spanish, French, German, Italian
<b>General</b>	
Outline Dimension	14.92" W x 13.23" H x 3.43" D
Net Weight	5.79Kg (13.0 lbs)
Material / Color	Metal / Black
Desk Top Stand	Tilt Back
Part / Labor	2year / 2year
Consumption: < On	< 40W
	AC100 ~ 240V(50/60Hz)
Electrical Ratings	DC12V
Operating Temperature	0 ~ 40°C / 32 ~ 104°F
Storage Temperature	-20 ~ 60°C / -4 ~ 140°F
<b>Mounts</b>	
VESA™ Mount Size	100 x 100mm
Wall	WB-5, WB-10, WB-30, WB-31
Ceiling	CMK-01
Rack	RMK-08


\*Design and specifications are subject to change without notice

### INPUT INTERFACE

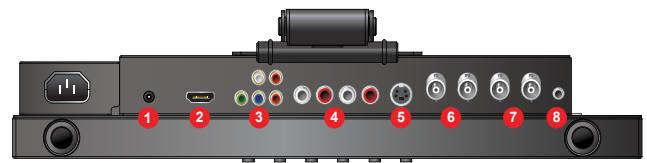


- 1 DC 12V In
- 2 HDMI In
- 3 Component In
- 4 Audio In (RCA Type)
- 5 S-Video In / Out
- 6 Video1 In / Out
- 7 Video2 In / Out
- 8 PC Stereo In
- 9 RGB In (15pin D-Sub)

### DIMENSIONS

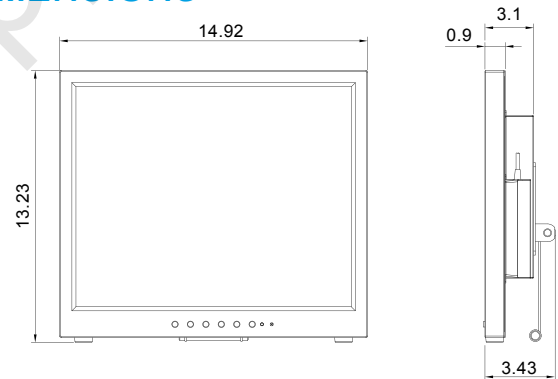


### ULTRA BRIGHT LED

ORION LED BLU (backlight unit) high brightness displays technology exceeds the NTSC color gamut standard of 100% with the LED BLU at 123% to provide a wider range of colours than ever before – you will see colors on screen as you see them in real world.

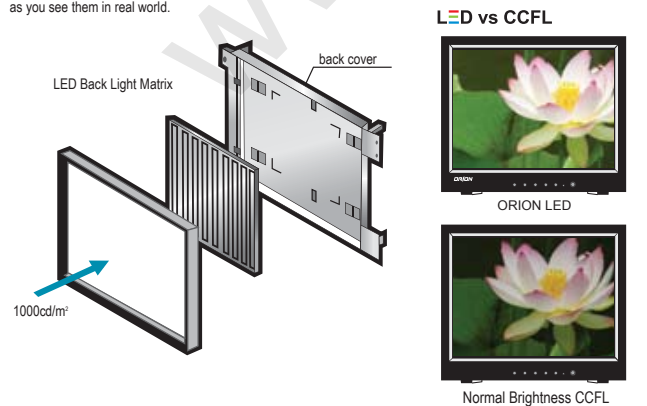

#### LED vs CCFL

### OPTIONAL MOUNTS

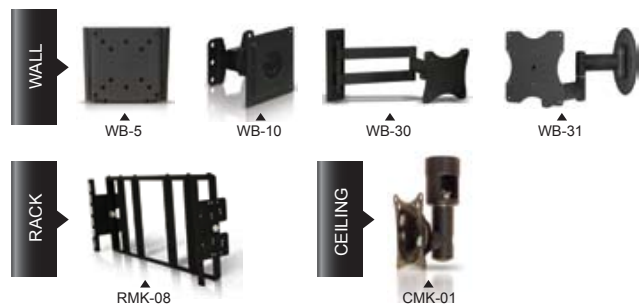

Distributed By: Audio Video Supply -- Tel: 1-800-284-2288 -- www.avsupply.com