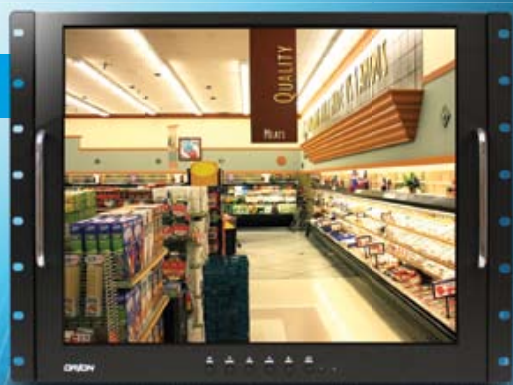


ORION®**OIC®** ORION IMAGES
CORPORATION

SPECIALIZING IN LCD / LED MONITORS

LED**RACK MOUNT READY****19RCR****BUILT TO RUN 24 X 7 X 365 CONTINUOUSLY**

OVERVIEW

The ORION Images 9RCRD, 15RCR, 17RCR and 19RCR LCD CCTV monitors with Tilt capability are designed with a Metal Cabinet and LCD Protective Glass for use in harsh environments ready to be installed into rack mount cabinets. The RCR series is ideal for Factory Control Rooms, Automotive, Marine, Industrial Panel PC, and special Kiosk applications.

FEATURES

- ▶ Industrial Electronic Galvanized Iron Cabinet
- ▶ LED Backlight Unit
- ▶ 1280 x 1024 @ 75Hz Resolution, 250 Nits, 1000:1 Contrast Ratio
- ▶ BNC Video 2 In / 2 Out, S-Video 1 In, HDMI In 1 In, VGA 1 In, Audio 1 In, PC Stereo 1 In
- ▶ 3D Motion Adaptive Deinterlacer
- ▶ 1W x 2 Built-In Speakers
- ▶ 8U Rack Mounting Form Factor

GSA

Contract No. GS-03F-0152X

**Built to run 24 x 7 x 365
Continuously**

For design help, accessories or pricing, please contact:
sales@avsupply or call: 1-858-565-1101

**Industrial****Interface****Flexible****AUDIOVIDEO SUPPLY**
1-800-284-2288 sales@avsupply.com
www.avsupply.com

Distributed By: Audio Video Supply -- Tel: 1-800-284-2288 -- www.avsupply.com

19RCR

RACK MOUNT READY

SPECIFICATIONS

19RCR	
Display	
Screen Size	19 Inch
Backlight Unit	LED BLU
Max. Resolution	1280 x 1024 @ 75Hz
Pixel Pitch	0.294 x 0.294mm
Brightness	250cd/m ²
Contrast Ratio	1000 : 1
Aspect Ratio	5 : 4
Viewing Angle (H/V)	170° / 160°
Display Color	16.7 Million
Response Time	< 5ms
Video System	NTSC / PAL
Interface	
Video In / Out (BNC Type)	2 In / 2 Out
HDMI In	1 In
S-Video In	1 In
VGA In (15Pin D-Sub)	1 In
Audio In (RCA Type)	1 In
PC Stereo In	1 In
Transmitter	
Remote Control	Yes
Audio	
Built-in Speakers	Yes (1W x 2)
Features	
Filter Type	3D Motion Adaptive De-interlacer
LCD Protection Glass	N/A
Multi Language	English, Spanish, French, German, Italian
General	
Outline Dimension (W x H x D)	18.98" x 13.9" x 2.9"
Net Weight	6.35Kg (14 lbs)
Material / Color	Electronic galvanized iron / Black
Tilt Function	Yes
Part / Labor	2year / 2year
Consumption: < On	< 30W
	AC100 ~ 240V(50/60Hz)
Electrical Ratings	DC12V / 3.5A
Operating Temperature	0 ~ 40° C / 32 ~ 104° F
Storage Temperature	-20 ~ 60° C / -4 ~ 140° F
Mounts	
VESA™ Mount Size	100 x 100mm
Wall	WB-5, WB-10, WB-30, WB-31
Ceiling	CMK-01
Form Factor	8U Rack Mounting
Mount Type	Tilttable Rack Mount


*Design and specifications are subject to change without notice

TILT CAPABILITY


RCR series has flexible tilttable rack mount capability




INPUT INTERFACE

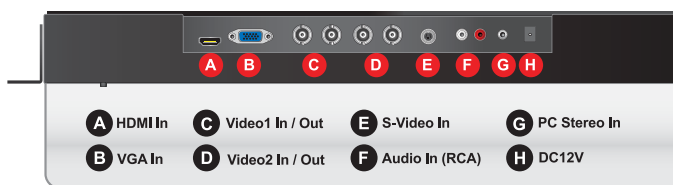

DIMENSIONS

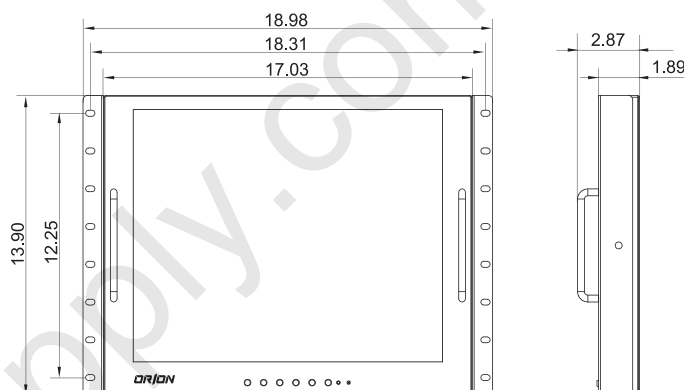

OTHER VIEW

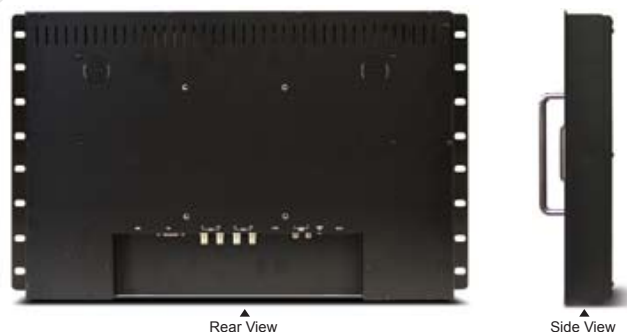

OPTIONAL MOUNTS



Distributed By: Audio Video Supply -- Tel: 1-800-284-2288 -- www.avsupply.com