



HDMI HDMI Input	 DVI Input	LED Backlight	600Nit High Brightness	21.5" 1/2 Screen Size	16:4.5 Aspect Ratio	 Metal Chassis
---------------------------	---------------	-------------------------	----------------------------------	---------------------------------	-------------------------------	-------------------

LED

22BLHB

WIDE VIEW BAR LCD MONITOR

OVERVIEW

The ORION Images introduces new 21.5 inch & 1/2 Bar LCD high brightness monitor using the panel resized from an original panel of the standard aspect ratio (16:4.5), which are extendable to various digital signage applications.

FEATURES

- » 21.5 Inch & 1/2 Screen Size / 1920 x 510 Native Resolution
- » 600cd/m² High brightness and 1000:1 high contrast panel is used
- » LED backlight to extend the lifetime and save power
- » Compact design than a regular 4:3 or 16:9 panel
- » Multiple Inputs : HDMI, DVI-D, VGA (15 pin D-sub), Audio (RCA Type)
- » Wide 178 degree horizontal and vertical viewing angle
- » Suitable for bank, convenience store, subway, bus, casino, department store, stadium, school and many more



GSA Contract No. GS-03F-0152X

For design help, accessories or pricing, please contact: sales@avsupply or call: 1-858-565-1101

AUDIO VIDEO SUPPLY
1-800-284-2288 sales@avsupply.com
www.avsupply.com

Distributed By: Audio Video Supply -- Tel: 1-800-284-2288 -- www.avsupply.com

22BLHB


WIDE VIEW BAR LCD MONITOR

SPECIFICATIONS

22BLHB	
Display	
Screen Size	21.5" 1/2
Active Area (H x V)	475.2 x 126.23mm
Native Resolution	1920 x 510
Pixel Pitch	0.2475 x 0.2475mm
Backlight Unit	LED BLU
Brightness	600 cd/m ²
Contrast Ratio	1000:1
Viewing Angle	178° / 178°
Interface	
VGA In (15pin D-sub)	1
HDMI In	1
DVI-D In	1
Audio In (RCA Type)	1
Audio	
Built-In Speaker	Option
Transmitter	
Wireless Controller	Option
RS-232C	Option
Cabinet	
Dimensions (Inch)	20.77 x 7.19 x 1.89
Weight	11.02 lbs (5kg)
Color	Black
Material	Metal
Power	
Input Voltage	DC12V
Power Consumption	N/A
Environment	
Operating Temperature	0° ~ 40° C / 32° ~ 104° F
Storage Temperature	-20° ~ 60° C / -4° ~ 140° F
Mount	
VESA™ Size	75 x 75mm
Wall	WB-31
Ceiling	CMK-01

*Design and specifications are subject to change without notice

INPUT INTERFACE

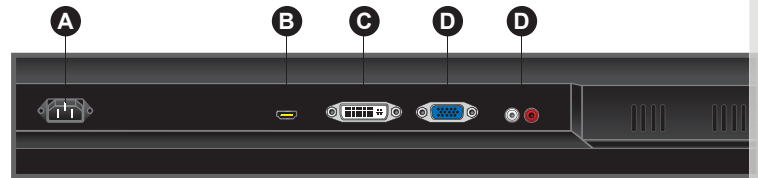

- A** DC12V Power
- B** HDMI In
- C** DVI-D In
- D** VGA In (15 Pin D-Sub)
- C** Audio In (RCA Type)

DIMENSION



OPTIONAL MOUNTS



Bar LCD Applications

Where to use

The ORION Images digital signage Bar LCD can be used in bank, convenience store, subway, bus, casino, super market, department store stadium, theatre, school and many more.

