

ORION[®]


OIC[®] ORION IMAGES CORPORATION

SPECIALIZING IN LCD / LED MONITORS

LED

FULL HD 1080p

PUBLIC VIEW



32PVMV

OVERVIEW

The ORION Images 32inch value PVM (Public View Monitor) with built in camera and motion detection sensor becomes a highly effective theft deterrent tool creating awareness that a security surveillance system is in place. The optional built in media card reader turns your loss prevention display into an advertising and marketing tool using pre loaded marketing material that can loop continuously.

FEATURES

- Metal Chassis
- Built-In WDR 1/3" Sony Super HAD CCD II Camera / Tilt Swivel Camera
- 650 TV Line Horizontal Resolution
- 0.05 / 0.0001 Lux
- LED Backlight Unit
- 1920 x 1080 Resolution, 400 Nits, 1300:1 Contrast
- 3D Comb Filter / De-Interlace
- PIR Motion Sensor (10 ~ 30 feet)
- BNC Video 1 In / 1 Out, Audio 1 In, HDMI 1 In, VGA 1 In, Camera 1 Out, PC Stereo 1 In
- Auto Source Sequencing



GSA Contract No. GS-03F-0152X

24/7/365
Built to run 24 x 7 x 365
Continuously

For design help, accessories or pricing, please contact:
sales@avsupply or call: 1-858-565-1101

AUDIO VIDEO SUPPLY
1-800-284-2288 sales@avsupply.com
www.avsupply.com

Distributed By: Audio Video Supply -- Tel: 1-800-284-2288 -- www.avsupply.com

32PVMV


PUBLIC VIEW MONITOR

SPECIFICATIONS


32PVMV	
Display	
Screen Size	32 Inch
Backlight Unit	LED BLU
Max. Resolution	1920 x 1080 @ 60Hz
Pixel Pitch	0.36375 x 0.36375mm
Brightness	400cd/m ²
Contrast Ratio	1300 : 1
Aspect Ratio	16 : 9
Viewing Angle (H/V)	178° / 178°
Display Color	16.7 Million
Response Time	< 8ms
Video System	NTSC / PAL
Interface	
Video In / Out (BNC Type)	1 In / 2 Out (Include Camera Out)
S-Video In	1 In
HDMI In	1 In
VGA In (15Pin D-Sub)	1 In
Audio In (RCA Type)	1 Left & Right
PC Stereo In	1 In
Transmitter	
Remote Control	Yes
Audio	
Built-in Speakers	Yes (7.5W x 2)
Features	
Filter Type	3D Comb Filter / De-Interlacing
Auto Source Sequencing	Yes
Motion Detection	PIR Motion Sensor (10~30 feet)
LCD Protection Glass	No
Multi Language	English, Spanish, French, German, Italian
Camera	
Camera Type	WDR Camera
Image Sensor	1/3" Sony Super HAD CCD II
Scanning System	2 : 1 interface
Mechanical Design	Tilt Swivel Camera
S/N Ratio	52 dB
Resolution	Horizontal : 650 TV Lines
Lens Mount	4~9mm Vari-focal Lens(F=1.2)
Sensitivity	0.05 Lux with F1.2 Lens 0.0001 Lux
Electronic Shutter	1/60 ~ 1/10,000 Sec
General	
Outline Dimension (W x H x D)	31.2" x 21.7" x 4.5"
Net Weight	21.0Kg (46.3 lbs)
Material	Electronic galvanized Iron
Color	Black (Optional White)
Part / Labor	2year / 2year
Consumption: < On	< 110W AC100 ~ 240V(50/60Hz)
Electrical Ratings	DC 24V
Operating Temperature	0 ~ 40 C / 32 ~ 104 F
Storage Temperature	-20 ~ 60 C / -4 ~ 140 F
Mounts	
VESA™ Mount Size	200 x 200mm
Wall	WB-2642
Ceiling	CMK-01 with FMA-01

*Design and specifications are subject to change without notice

INPUT INTERFACE

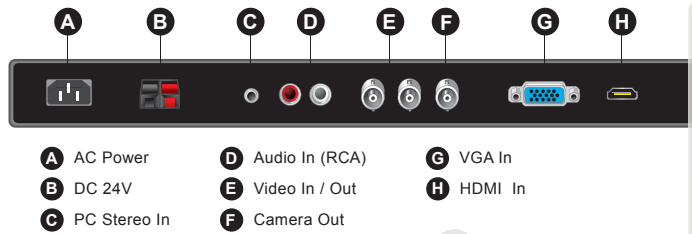

DIMENSIONS

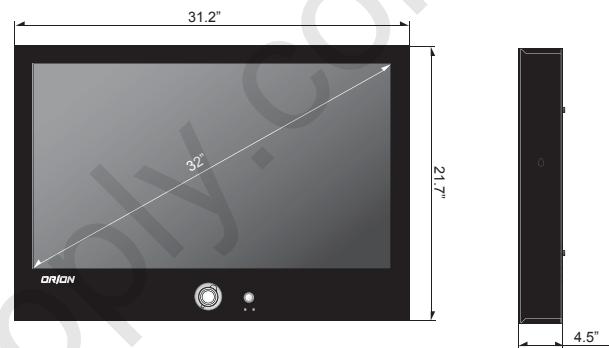


OPTIONAL MOUNTS



ADVANTAGES


Motion Detection

A motion detector is a device that detects moving objects, particularly people. A motion detector is often integrated as a component of a system that automatically performs a task or alerts a user of motion in an area.

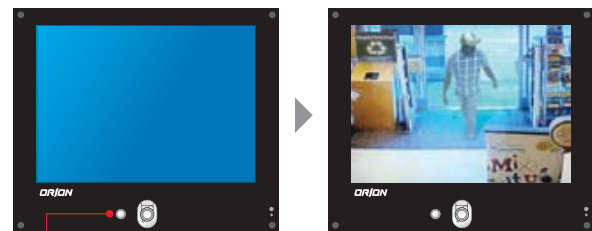

Before detect any motion
Motion Sensor

After detect any motion

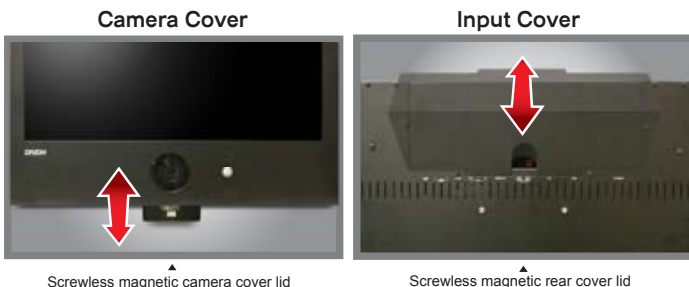

Screwless magnetic camera cover lid

Screwless magnetic rear cover lid