



CHDP-21DOIC

2.0M 1080P IP FULL HD IR CCTV OUTDOOR / INDOOR DOME CAMERA

This 2.0 Mega Pixel IP camera offers many advanced features as the high end security applications.


SPECIAL FEATURES

- » Resolution - Up to 1920 x 1080 @ 30fps / H.264
- » SONY 1/3" 2.0M Pixel Color CMOS Image Sensor
- » Triple Streaming (HD Recording, HD Live, SD Live)
- » WDR (Wide Dynamic Range)
- » 3D DNR (Digital Noise Reduction)
- » Mechanical IR Cut Filter for True Day & Night
- » Dual Voltage (AC 24V / DC 12V) & POE (Default)
- » Easy Focusing with Two Motors - Zoom & Focusing
- » 20 x IR LED Applied
- » Min. Latency (180 ms)
- » Easy GUI (OSD MENU) by CVBS Video
- » IP68




APPLICATIONS

SOLUTION 1 CHDP-21DOIC + IPNVRP401 + HDMI or PC MONITOR

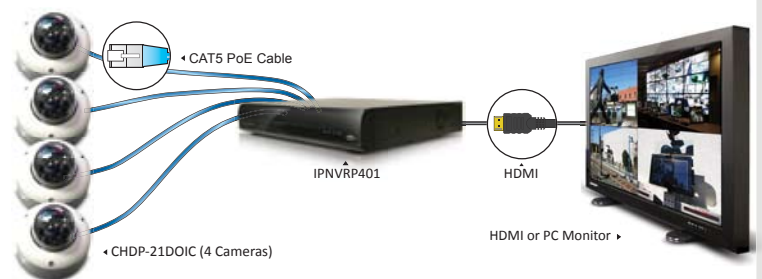

SOLUTION 2 CHDP-21DOIC + IPNVRP801 + HDMI or PC MONITOR

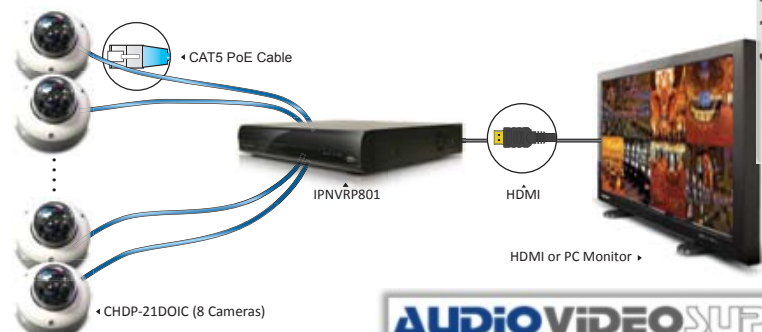

Distributed By: Audio Video Supply -- Tel: 1-800-284-2288 -- www.avsupply.com

CHDP-21DOIC


2.0M 1080P IP FULL HD IR LED CCTV DOME CAMERA

SPECIFICATIONS

CHDP-21DOIC	
CAMERA	
Image Sensor	SONY 1/3" 2.0 Mega Pixel Color CMOS Image Sensor
Focal Length	Vari Focal 3.5 ~ 16mm, F1.2
Horizontal Angle	96.2° (W) ~ 28.3° (T)
Min. Illumination	0.001 Lux (F1.6, 30IRE, TDN (B/W))
S/N Ratio	50dB or More
AE Mode	Auto / Shutter Priority
Shutter Speed	1/30 ~ 1/10000 sec
Focusing (Option)	Easy Focusing Control by Remote
White Balance	Auto / Auto High / Auto Low
VIDEO	
Video Compression	H.264 / MPEG / MJPEG
Video Output	CVBS (BNC Type & OSD Supported)
Video Streaming	Triple: Recording (All Resolution) HD (1920 x 1080, 1280 x 1024, 1280x 720, 720 x 480) SD (720 x 480, 352 x 240)
Resolution	1920 x 1080, 1280 x 1024, 1280 x 720, 720 x 480, 352 x 240 @ 30fps (NTSC)
Composite OSD	Set Up (Video Streaming, Camera, Device, Network, System), Status
AUDIO	
Input	1 Line In
Output	1 Line Out
Sampling	8K
NETWORK	
Ethernet	Ethernet 10 / 100 Base-T (RJ-45)
DDNS	Dedicated Dynamic IP Service
Protocol	HTTP, FTP, SMTP, DNS, DynDNS, NTP, RTSP, RTP, TCP, UDP, ARP, DHCP
ALARM / EVENT	
Motion Detection	4 Zone Motion Detection
Alarm Input / Output	1 Alarm Input, 1 Alarm Output
Event	Normal / Event Recording Send Capture Image by E-mail Send Capture Image to SD Card and FTP Server

*Design and specifications are subject to change without notice

DIMENSION

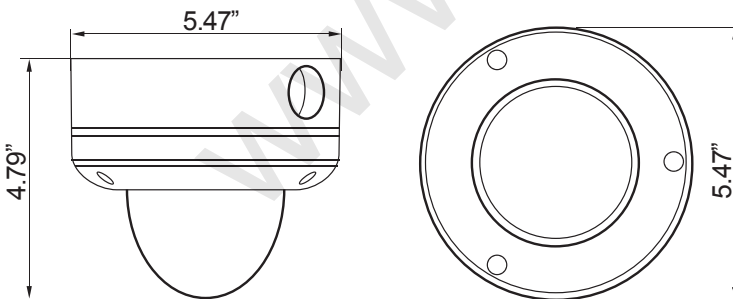

WHERE TO USE

ORION CHDP-21DOIC HD CCTV Camera can be used in Bank, Casino, High Technology Store, Military, Police Station, Conference Room, Business and etc...



OUTPUTS



Distributed By: Audio Video Supply -- Tel: 1-800-284-2288 -- www.avsupply.com