## VIDEO WALL **SOLUTIONS**

ORION Images RNK Video Wall series has Immediate Benefits for Security Room, Retail, Shopping Mall, Corporation, Broadcast, Transportation, Government, Health Care, Casino and more

# RNK70NNF

ORION Images is leading the market as being an expert in control room solutions for broadcasting, telecommunications, public utilities, process control, traffic control, surveillance and command & control applications. Our LCD video wall solutions are ideal for Emergency Operations Centers, traffic and surveillance centers, and utilities and process control rooms. The RNK series is the perfect solution for displaying 1 image across multiple monitors using 1 video source up to a 10 x 10 configuration.
















Distributed By: Audio Video Supp

### Video Walls for Security, Control Rooms, Commercial AV, Professional AV & has immediate benefits for:

In addition, this solution can also be used for corporate AV and Digital Signage applications such as shopping malls, airports, stadiums, lobby signage, boardrooms, and more. Whether small lobby display or extra large video walls, the tiled RNK series makes statement. Public Display Signage receives 10 times the eye contact of static signage and is creating cost-effective opportunities to improve customer service, safety, way finding, branding, training, and communications.

Unlike plasma technology, LCD video walls require less power consumption and with auto pixel shift built in they are not subject to permanent, irreversible burn-in. Unlike individual mount LCD's that leave gaps between each monitor, tiled video walls offer more flexibility, scalability and the possibility for a higher resolution.





Universities & colleges

Corporations

Transportation

Health Care & Medical

Government

Financial Institutions Hospitality





For design help, accessories or pricing, please contact: sales@avsupply or call: 1-858-565-1101

1-800-284-2288 sales@avsupply.com www.avsupply.com

#### **SPECIFICATIONS**

|                                      | RNK70NNF                                  |
|--------------------------------------|---|
| Bezel Width                          |   |
| Bezel Width                          | 23.2mm                                    |
| Display                              |   |
| Screen Size                          | 70 Inch                                   |
| Max. Resolution                      | 1920 x 1080 @ 60Hz                        |
| Pixel Pitch                          | 0.807 x 0.807mm                           |
| Brightness                           | 400cd/m²                                  |
| Contrast Ratio                       | 4000 : 1                                  |
| Aspect Ratio                         | 16:9                                      |
| Viewing Angle                        | 178° / 178°                               |
| Display Color                        | 16.7 Million (8bit)                       |
| Response Time                        | < 8ms (Gray to Gray)                      |
| Video System                         | NTSC / PAL                                |
| Interface                            |   |
| Video In / Out (BNC Type)            | 2/2                                       |
| HDMI In / Out                        | 1/1                                       |
| VGA In / Out (15Pin D-Sub)           | 1 / 1                                     |
| DVI-D In / Out                       | 1/1                                       |
| RS232 In / Out                       | 1/1                                       |
| PC Stereo In                         | 1   |
| Audio In (RCA Type)                  | 2 (L + R)                                 |
| Audio                                |   |
| Built In Speaker                     | 10W x 2                                   |
| Transmitter                          |   |
| IR Remote Control                    | Yes                                       |
| Features                             |   |
| Multi Display Function               | PBP / PIP                                 |
| Temperature Sensor                   | Yes                                       |
| Filter Type                          | 3D Comb Filter                            |
| De-Interlace                         | Yes                                       |
| Noise Reduction                      | Yes                                       |
| One Image Up to 10 x 10              | Yes                                       |
| Auto Fan Control System              | Yes                                       |
| Auto Pixel Shift                     | Yes                                       |
| Trigger Source Switching             | Yes                                       |
| Auto Source Switching                | Yes                                       |
| Edge Setting (Horizontal / Vertical) | Yes                                       |
| Advance Auto Power Recovery          | Yes                                       |
| Multi Language                       | English, Spanish, French, German, Italian |
| RS-232C Control                      | Monitor OSD control using PC              |
| Outline Dimension                    |   |
| Dimension (W x H x D)                | 63.09" x 36.39" x 4.21"                   |
| Net. Weight                          | 65.5Kg (144.0 lbs)                        |
| Warranty                             |   |
| Part / Labor                         | 3year / 3year                             |
| Circumastance                        |   |
| Operating Temperature                | 0° ~ 40° C / 32° ~ 104° F                 |
| Power                                |   |
| Electrical Ratings                   | AC 100 ~ 240V (50/60Hz)                   |
| Power Consumption                    | < 320W                                    |
| Mount                                |   |
| VESA™ Mount Size                     | 800 x 600mm                               |
| VLOA WOUTH SIZE                      |   |
| Video Wall                           | WFS, WES, WSD                             |

#### SOFTWARE

#### Video Wall Control Management S/W features:


- Extremely easy to use
- O Control each display Separately or All at once
- Select 1 or multiple monitor viewing configurations
- Multi Vision options: example 5x5 (boarder) from DVI and 3x3 (in the center)
- Schedule a sequence of multiple display content configurations
- File Management Save and store edited contents for easy replay access
- Select input source
- Menu lock out (IR or panel)
- Description Power control On / Off
- Color setting (RGB) & Brightness
- Edge setting (horizontal & vertical gap)

#### **HARDWARE**

#### Hardware features:

- Spread 1 image across multiple monitors using 1 video source
- Onfigure up to a 10 x 10
- Video Wall Processor built in
- Remote Display Management
- Landscape and Portrait
- DHDMI In / Out
- DVI-D In / Out
- VGA In / Out
- RS-232C In / Out for pc / server control
- Control panel Lock (panel or IR)
- All metal chassis
- Auto power recovery
- Auto pixel shift
- DIP / PBP Dual signal In
- VESA standard hole patterns

#### **INTERFACE**

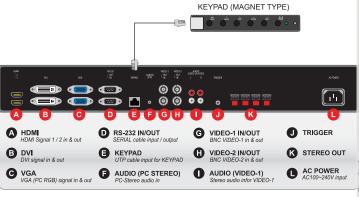

#### **MOUNTS**









Design and specifications are subject to change without notice





7300 Bolsa Avenue, Westminster, CA 92683 Tel. 714.766.6300 / Fax. 714.766.6310 / sales@orionimages.com / www.orionimages.com

