



VF703GHC

HIGH PERFORMANCE
7" LED VIEWFINDER / FIELD MONITOR

3G
3G-SDI

LED
Backlight Unit

178°
Viewing Angle

16:9
Aspect Ratio



This 7" monitor uses an IPS panel featuring 178°/178° wide viewing angles and is capable of multi-inputs including 3G-SDI and HDMI input and output. Many of the built-in functions and front assignable buttons make very convenience to use in the field.

SPECIAL FEATURES

- 7" IPS 1280 x 800 Wide Viewing Angles and High Resolution
- Video Input : 3G-SDI / HDMI / YPbPr / CVBS
- Video Output: 3G-SDI / HDMI
- Brightness 400cd/m²
- Contrast 800:1
- Tally Interface
- Input Power DC7-24V (XLR Connector)
- Optional AB or IDX Battery Bracket
- Center & Screen Markers
- Peaking Filter
- False Colors
- Aspect Ratio
- Underscan
- PIP & Zoom
- HV Delay
- Flip H/V



Our Viewfinder / Field monitor support 3G-SDI / HDMI / YPbPr / CVBS video inputs and 3G-SDI / HDMI video outputs. Also use DC7-24V (XLR Connector) power input.

The versatile folding sunshade hood is easy viewing in field and outside broadcast production when critical monitoring is required. It quickly removes when not needed.



178° horizontal & 178° vertical wide viewing angles, it's available for people viewing from different angles with the same visual effect.

Distributed By: Audio Video Supply -- Tel: 1-800-284-2288 -- www.avsupply.com

VF703GHC

HIGH PERFORMANCE 7" LED VIEWFINDER / FIELD MONITOR

SPECIFICATIONS

VF703GHC	
Panel	7 Inch IPS
Resolution	1280 x 800 Pixels
Pixel Pitch	0.11775mm x 0.11775mm
Display Area	150.72mm x 94.2mm
Color	262K
Brightness	400 cd/m ²
Contrast	800 : 1
Aspect Ratio	16 : 9
Backlight	LED
Video Interface	CVBS 1 In, YPbPr 1 In, HDMI 1 In/Out Speaker 1 (built-in) / Ear Phone 1 (built-in)
SDI In	1080p (23.98/24/25/29.97/30/50/59.94/60) 1080psf (23.98/24/25/29.97/30) 1080i / 720p (50/59.94/60), 480i (59.94), 575i (50)
Functions Assignable in F1-F4 (* is Default)	Center Marker, Screen Marker, Check Field, Color Bar, PIP Camera, Flip, Zoom, Pixel-to-Pixel, Freeze Input, H/V Delay Under Scan, Peaking*, False Color*, Exposure*, Histogram*
Dimensions (mm)	191.5 x 152.3 x 41.7
Environment	0° C ~ 50° C (Operating) / -20° C ~ 60° C (Storage)
Power Requirement	100VAC to 240VAC (with AC Adaptor, XLR Connector)
Power Consumption	Approx. 11W
Weight	1.67 lbs, 2.06 lbs (w/ cover), 4.76 (w/ carrying case)
Optional Rack Mount	RMK-02

*Design and specifications are subject to change without notice

STANDARD ACCESSORIES

ORION Images VF703GHC comes with Sunshade Hood, SONY & CANON Battery Brackets, Carrying Case and many more...



Carrying Case

Shoe Mount

Sony Bracket for F970

HDMI Cable



Canon Bracket for LEP6

Folding Sunshade Hood

Power & Tally Cable

DC Adapter

OPTIONAL ACCESSORIES



BB-AB
Anton Bauer Battery
Bracket

BB-IDX
IDX Battery Bracket


ADVANCED FUNCTIONS

Design for Broadcasting & Live Events

- Tally interface will be available when monitor becomes view finder of camcorder.
- Adjustable gimbal bracket & ear phone slot.
- Slim & portable, easy for installation.
- DC powered. Optional Anton Bauer & IDX battery brackets can be mounted on back.



Peaking



False Color




Exposure



Histogram

DIMENSIONS

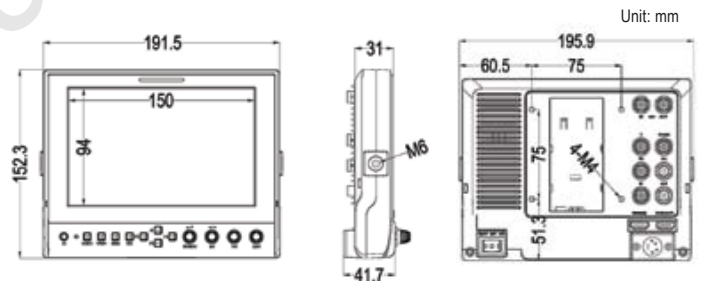

OPTIONAL RACK MOUNT



VF703G-RMK2

This model shown display dual VF703GHC View Finder monitor with RMK-02 4U rack mount kit.

VF703G-RMK1

This model shown display single VF703GHC View Finder monitor with BLK-02 metal plate.



BLK-02



ORION IMAGES INCORPORATION
7300 Bolsa Avenue, Westminster, CA 92683
Tel. 714.766.6300 / Fax. 714.766.6310 / www.orionimages.com
©ORION Images Incorporation. All rights reserved. ver. 111208-1.2

GSA Contract No. GS-03F-0152X

For design help, accessories or pricing, please contact:
sales@avsupply or call: 1-858-565-1101

Distributed By: Audio Video Supply -- Tel: 1-800-284-2288 -- www.avsupply.com