

49" EXTREME NARROW BEZEL HIGH BRIGHTNESS LED VIDEO WALL MONITOR



VZ-49EHB ADVANTAGES

- 49" 1080p CCTV LED Monitor
- Extreme Narrow **0.9 mm** Metal Bezel & **800 cd/m²** High Brightness
- Image Rotation Feature Prevents "Pixel Burn-In"
- Auto Source & Power Recovery
- Digital & Analog Inputs
- 3D Comb-Filter & De-Interlace
- 3-Year Warranty




MODEL #		VZ-49EHB
VIDEO		
Screen Size	49"	
Max. Resolution	1920 x 1080 @60Hz	
Pixel Pitch	0.55926 mm x 0.55926 mm	
Brightness	800cd/m ² (Typical)	
Contrast Ratio	3500:1	
Aspect Ratio	16 : 9	
Viewing Angle (H/V)	178° / 178°	
Display Color	16.7 M	
Response Time	< 8ms	
Video System	NTSC / PAL	
INTERFACE		
VGA In (15Pin D-Sub)	1	
AV (Composite) In	1	
DVI-D In	1 (Support 3480 x 2160 @30hz)	
HDMI In	1 (Support 3480 x 2160 @60hz)	
DP In	1 (Support 3480 x 2160 @30hz)	
USB In	1	
RS232 (RJ-45) In / Out	1 / 2	
SPECIAL FEATURES		
Bezel Width	TOP and LEFT Side	0.030" / 0.9 mm
	BOTTOM and RIGHT Side	0.030" / 0.9 mm
	ACTIVE AREA to ACTIVE AREA	0.070" / 1.8 mm (Bezel to Bezel)
Image Retention	YES	

DIMENSIONS & WEIGHT	
Outline Dimension (W x H x D)	42.34" x 23.85" x 4.44" (1075.6 mm x 605.8 mm x 112.8 mm)
Net Weight / Gross Weight	56.65 lbs (25.69 kg) / 74.51 lb (33.79 kg)
MOUNT	
Universal	600 x 400 (100 x4), M5 x L8 Screws
GENERAL	
Transmitter - IR Remote Control	YES
Power	Electrical Ratings Consumption
	AC100 ~ 240V (50/60Hz) 120 W (Max) / 2 W (Standby)
Regulations	FCC, RoHS
Warranty	Parts/ Labor
	3 Year / 3 Year
Operating Temperature	32 - 120°F / 0 - 50°C
Storage Temperature	32 - 140°F / 0 - 60°C
Operating Humidity (Non-Condensing)	20% ~ 80% RH
Compatible Mounts	Wall Ceiling
	VZ-XMS, VZ-WM71 VZ-CMK04, VZ-CMKIT-04


Specification subject to change without notice.

49" EXTREME NARROW BEZEL HIGH BRIGHTNESS LED VIDEO WALL MONITOR

DIMENSIONS

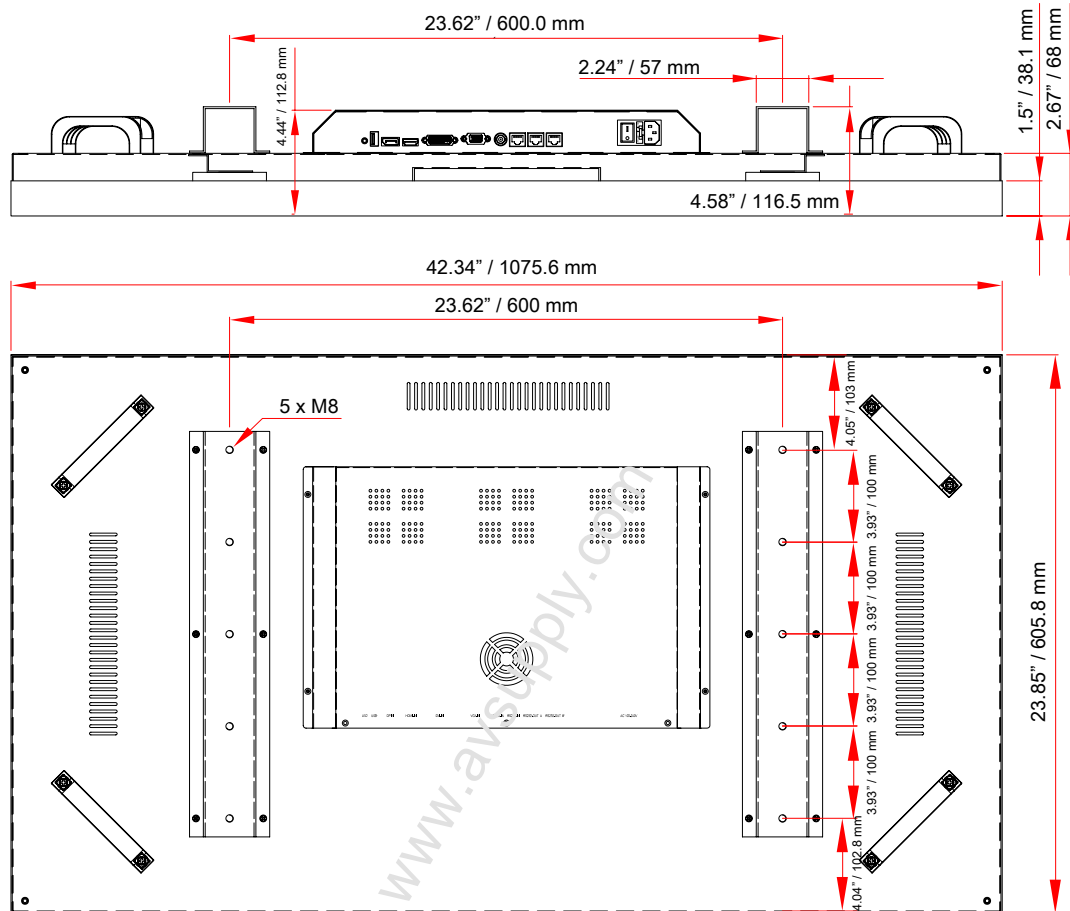

INTERFACE

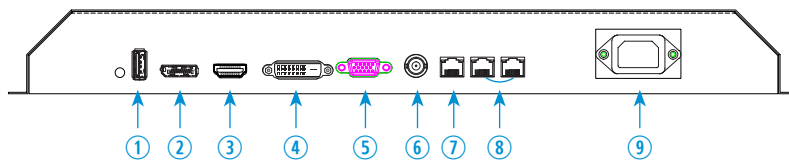

1. USB IN
2. DP IN
3. HDMI IN
4. DVI-D IN
5. VGA IN
6. AV(composite)IN
7. RS232 (RJ-45) IN
8. RS232 (RJ-45) OUT
9. AC 110V IN

Specification subject to change without notice.