

55" EXTREME NARROW BEZEL HIGH BRIGHTNESS LED VIDEO WALL MONITOR



VZ-55EHB ADVANTAGES

- 55" 1080p CCTV LED Monitor
- Extreme Narrow **0.9 mm** Metal Bezel & **700 cd/m²** High Brightness
- Image Rotation Feature Prevents "Pixel Burn-In"
- Auto Source & Power Recovery
- Digital & Analog Inputs
- 3D Comb-Filter & De-Interlace
- 3-Year Warranty




MODEL #		VZ-55EHB
VIDEO		
Screen Size	55"	
Max. Resolution	1920 x 1080 @60Hz	
Pixel Pitch	0.630mm x 0.630mm	
Brightness	700cd/m ² (Typical)	
Contrast Ratio	3500:1	
Aspect Ratio	16 : 9	
Viewing Angle (H/V)	178° / 178°	
Display Color	16.7 M	
Response Time	< 8ms	
Video System	NTSC / PAL	
INTERFACE		
VGA In (15Pin D-Sub)	1	
AV (Composite) In	1	
DVI-D In	1 (Support 3480 x 2160 @30hz)	
HDMI In	1 (Support 3480 x 2160 @60hz)	
DP In	1 (Support 3480 x 2160 @30hz)	
USB In	1	
RS232 (RJ-45) In / Out	1 / 2	
SPECIAL FEATURES		
Bezel Width	TOP and LEFT Side	0.030" / 0.9 mm
	BOTTOM and RIGHT Side	0.030" / 0.9 mm
	ACTIVE AREA to ACTIVE AREA	0.070" / 1.8 mm (Bezel to Bezel)
Image Retention	YES	

		DIMENSIONS & WEIGHT
Outline Dimension (W x H x D)		47.69" x 26.85" x 4.43" (1211.4 mm x 682.2 mm x 112.7 mm)
Net Weight / Gross Weight		61.83 lb (28.05 kg) / 66.24 lb (30.05 kg)
MOUNT		
Universal		600 x 400 (100 x4), M5 x L8 Screws
GENERAL		
Transmitter - IR Remote Control		YES
Power	Electrical Ratings	AC100 ~ 240V (50/60Hz)
	Consumption	180 W (Max) / 2 W (Standby)
Regulations		FCC, RoHS
Warranty	Parts/ Labor	3 Year / 3 Year
Operating Temperature		32 - 120°F / 0 - 50°C
Storage Temperature		32 - 140°F / 0 - 60°C
Operating Humidity (Non-Condensing)		20% ~ 80% RH
Compatible Mounts	Wall	VZ-XMS, VZ-WM71
	Ceiling	VZ-CMK04, VZ-CMKIT-04


Specification subject to change without notice.

55" EXTREME NARROW BEZEL HIGH BRIGHTNESS LED VIDEO WALL MONITOR

DIMENSIONS

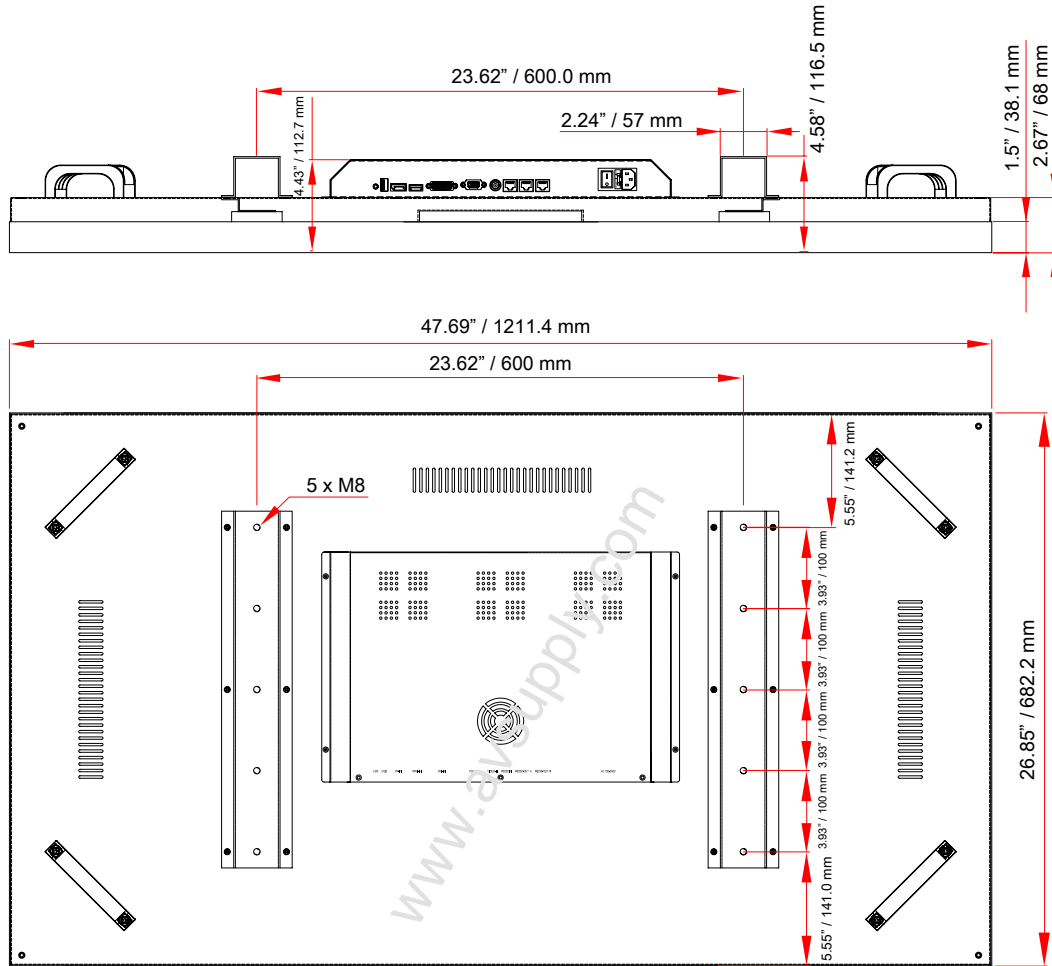

INTERFACE

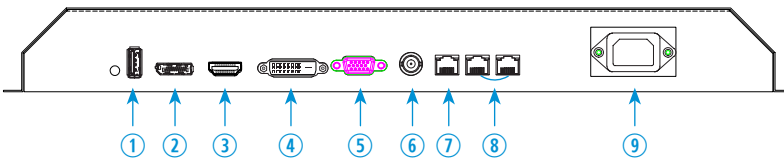

1. USB IN
2. DP IN
3. HDMI IN
4. DVI-D IN
5. VGA IN
6. AV(composite)IN
7. RS232 (RJ-45) IN
8. RS232 (RJ-45) OUT
9. AC 110V IN

Specification subject to change without notice.