

# 17" LED Monitor

## SMT-1734

### 17" LED Monitor

- Support up to 1,280 x 1,024 resolution
- High contrast ratio 1,000 : 1
- Fast response time 5ms
- Video input : HDMI, VGA, BNC
- Tempered glass screen




17" LED Monitor  
**SMT-1734**



**Dimensions**

Unit : mm (inch)

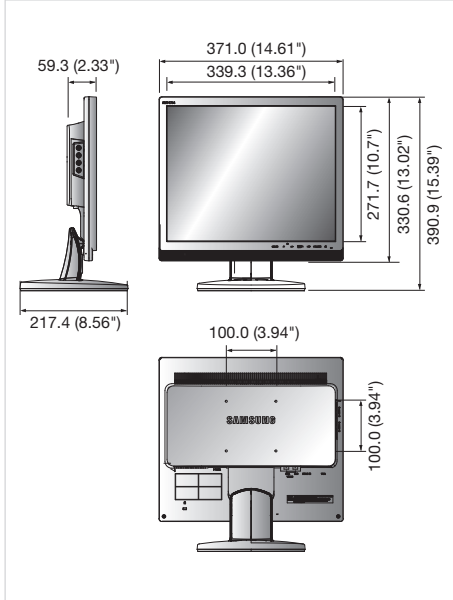

**SMT-1734**

DISPLAY		
Type	LED	
Screen Size	17"	
Max. Resolution	1,280 x 1,024	
Brightness	250cd/m <sup>2</sup>	
Contrast Ratio	1,000 : 1	
Aspect Ratio	4 : 3	
Viewing Angle (H/V)	170° / 160°	
Display Color	16.7million	
Response Time	5ms	
Video System	NTSC / PAL	
Panel Life	30,000hours	
Filter Type	3D combfilter	
INTERFACE		
Video	Connector	BNC type (1 in / 1 out)
	Connector	Analogue D-sub (15 pin)
	Input Signal	0.7Vp-p ±5%
RGB / DVI	Available Format	640 x 480@60Hz/72Hz/75Hz (VGA)
		720 x 400@70Hz, 800 x 600@56Hz/60Hz/72Hz/75Hz (SVGA)
		832 x 624@75Hz, 1,024 x 768@60Hz/70Hz/75Hz (XGA)
		1,152 x 864@75Hz, 1,280 x 720@60Hz 1,280 x 960@60Hz, 1,280 x 1,024@60Hz/75Hz (SXGA)
HDMI	Connector	HDMI
	Available Format	640 x 480p@60Hz, 720 x 480p@60Hz, 720 x 576p@50Hz, 1,280 x 720p@50Hz/60Hz, 1,920 x 1080p@50Hz/60Hz
Audio	Connector	2 RCA type (2 stereo input)
	Output Signal	Speakers : 2 x 1W
Application Support	Remote controller	
ON SCREEN DISPLAY		
Functions	Samsung UI, VESA™ DPM compatible	
Language	English, French, German, Italian, Spanish, Russian, Portuguese, Dutch, Swedish, Danish, Turkish, Thai, Arabic, Chinese, Japanese, Korean	
GENERAL		
Electrical	Input Voltage	100 ~ 240V AC (50/60Hz)
	Power Consumption	19W
Environmental	Operating Temperature	0 ~ +40°C (+32°F ~ +104°F)
	Operating Humidity	20% ~ 90% (Non-condensing)
Mechanical	Dimensions with Stand (WxHxD)	371.0 x 390.9 x 217.4mm (14.61" x 15.39" x 8.56")
	Dimensions without Stand (WxHxD)	371.0 x 330.6 x 59.3mm (14.61" x 13.02" x 2.33")
	Bezel Size	Top 19.1mm (0.75") / Bottom 39.7mm (1.56")
	Weight	5.4Kg (11.9 lb)
	LED Protection Glass	Yes
	Cabinet Color	Black
VESA Mounts Interface	100 x 100mm (3.94" x 3.94")	



The Eco mark represents Samsung Techwin's will to create environment-friendly products, and indicates that the product satisfies the EU RoHS Directive.

Design and specifications are subject to change without notice.

■ DISTRIBUTED BY



**SAMSUNG TECHWIN CO., LTD.**

6, Pangyo-ro 319beon-gil, Bundang-gu, Seongnam-si, Gyeonggi-do, SEOUL 463-400 Rep. of KOREA  
Tel : +82-70-7147-8741~8749, 8752~8760 Fax : +82-31-8018-3745 www.samsungsecurity.com www.samsungcctv.com  
COPYRIGHT BY SAMSUNG TECHWIN. ALL RIGHT RESERVED

**SAMSUNG TECHWIN AMERICA Inc.**

100 Challenger Rd. Suite 700 Ridgeland Park, NJ 07660  
Toll Free : +1-877-213-1222 Direct : +1-201-325-6920  
Fax : +1-201-373-0124

**SAMSUNG TECHWIN EUROPE LTD.**

2nd Floor, No. 5 The Heights, Brooklands, Weybridge,  
Surrey, KT13 0NY, UK  
Tel : +44-1932-82-6700 Fax : +44-1932-82-6701

**SHANGHAI SAMSUNG TECHWIN CO., LTD.**

32F, Blk B, International Business Center,  
No. 391 Guiping Rd., Shanghai, China, 200233  
Tel : +86-21-5427-1155 Fax : +86-21-5423-5122



**SAMSUNG TECHWIN**