


Intense-IR Series Weather Resistant Color Day/Night Bullet Camera

- CVC5815DNV** 2.8 -12mm auto iris varifocal lens, dark grey housing
- CVC5815DNVW** 2.8 -12mm auto iris varifocal lens, white housing
- CVC5915DNV** 5 - 50mm auto iris varifocal lens, dark grey housing
- CVC5915DNVW** 5 - 50mm auto iris varifocal lens, white housing

Features

- 1/3" Sony Super HAD II™ CCD
- 600 TV lines of resolution
- True Day/Night compatibility
- 3DNR - sharp image under ultra low light level
- Intense-IR function - non-saturated, vivid image
- Defect function - elimination of white spots
- HSBLC (High Light Suppression BLC)
- Privacy zone
- Two heaters to stop condensation
- Third-Generation DSP chip
- ICR - removable IR cut filter
- Full OSD operation
- 32x digital zoom
- External control rings for easy focus and distance adjustment
- 12VDC / 24VAC dual voltage operation
- 5 year warranty

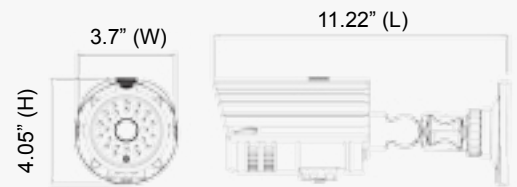

Specifications

Image Sensor	1/3" Sony Super HAD II™ CCD	Motion Detection.....	On / Off (4 zones)
Resolution.....	600 TV lines	Sense-Up.....	Off / Auto (selectable limit x2 - x256)
Minimum Illumination.....	0.000006 lux (IR LEDs on)	Mirror	Mirror / V-Flip / Rotate / Off
Effective Pixels	768 (H) x 494 (V)	Freeze	On / Off
Total Pixels	811 (H) x 508 (V)	Day/Night.....	Color / BW / Auto
Number of IR LEDs	35	Digital Zoom	On (32x) / Off
IR Range	Up To 65 ft. (depending on scene reflection)	Defect Compensation	256 points
IR LED Wavelength	850nm	Power Consumption	12VDC, 950mA max. / 24VAC, 330mA
White Balance	ATW / AWB / Manual / AWC - Set	Power Supply	12VDC / 24VAC dual voltage operation (power supply not included)
AGC.....	Low / Middle / High / Off	Operating Temperature/	
S/N Ratio	52dB (AGC off, Weight on)	Humidity.....	- 4° F – 140° F / RH 95% max.
Backlight Compensation.....	BLC / HSBLC / Off	Storage Temperature/	
Electronic Shutter Speed.....	Auto (1/50 sec., 1/60 sec. - 1/100,000 sec.)	Humidity.....	- 4° F – 140° F / RH 95% max.
OSD.....	Available	Dimensions.....	3.7" (W) x 4.05" (H) x 11.22" (L)
3DNR.....	On / Off (0-100 levels adjustable)	Weight	3.53 lbs.
DWDR	Indoor / Outdoor / Off		
Sharpness	0 - 31' (level adjustable)		
Privacy.....	On / Off (8 zones)		
Scanning System.....	2:1 interlace		
Synchronization.....	Internal		

Optional Accessories



CVCJBB
Bullet Camera
Junction Box



INTJBS
Square
Junction Box



INTCM
Corner/Pole
Adaptor



PSW4
24VAC
Power Supply



PSDC24
12VDC
Power Supply



Speco Technologies is constantly developing and improving products. We reserve the right to modify product design and specifications without notice and without incurring any obligation.
Spec Rev. 5/30/13