


Glacier™ Series Bullet Cameras with PIR Sensor & White LEDs

HT5100BPVFG	2.8-12mm auto iris varifocal lens, dark grey housing
HT5100BPVFGW	2.8-12mm auto iris varifocal lens, white housing
HT5200BPVFG	5-50mm auto iris varifocal lens, dark grey housing
HT5200BPVFGW	5-50mm auto iris varifocal lens, white housing

Features

- 1/3" Sony Super HAD™ II CCD
- 600 TV lines of resolution
- True Day/Night capability
- Digital Deterrent®: white LEDs are turned on when motion is triggered
- 24pcs 850nm IR LEDs / 6pcs white LEDs
- External controls for zoom & focus
- Full OSD operation
- Operates at -40°F with Glacier heaters
- Automatic thermostatic sensor
- Alarm output for motion detection
- EZ mount system simplifies installation
- Weather resistant operation
- 12VDC / 24VAC dual voltage operation
- 5 year warranty

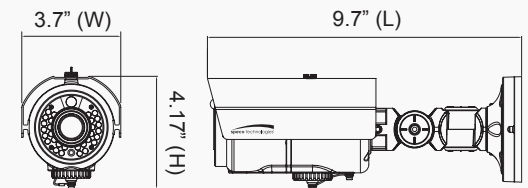

Specifications

Image Sensor	1/3" Sony Super HAD™ II CCD	White Balance	ATW / Outdoor / Indoor / Manual / AWC
Resolution.....	600 TV lines	Sense-Up.....	Auto / Off (selectable x2 - x512)
Minimum Illumination.....	0.00001 lux / 0.00006 lux (IR on)	Motion Detection.....	On / Off (8 programmable zones)
Effective Pixels	768 (H) x 494 (V)	Privacy Masking	On / Off (12 programmable zones)
Total Pixels	811 (H) x 508 (V)	3DNR.....	On / Off (level adjustable)
Number of LEDs.....	IR: 24, white: 6	Digital Zoom	On / Off (1x - 16x)
IR Range	HT5100BPVFG: Indoor 131 ft. / Outdoor 82 ft. HT5200BPVFG: Indoor 164 ft. / Outdoor 98 ft.	DIS.....	On / Off
IR LED Wavelength	850nm	Sharpness	On / Off (level adjustable)
TV System.....	NTSC	Flip/Mirror	On / Off
Scanning Frequency.....	15.734kHz (H) & 59.94Hz (V)	Power Supply	12VDC / 24VAC dual voltage operation (power supply not included)
Scanning System.....	2:1 interlace	Power Consumption DC ...	Heater on: 1.1A, heater off: 450mA
Synchronization	Internal	Power Consumption AC ...	Heater on: 500mA, heater off: 250mA
S/N Ratio	More than 52dB	Operating Temperature/	
Video Output.....	CVBS: 1.0Vp-p / 75 ohms	Humidity.....	- 40° F – 140° F / RH 95% max.
Electronic Shutter Speed..	1/60 sec. – 1/120,000 sec.	Storage Temperature/	
SSDR.....	On / Off (level adjustable)	Humidity.....	- 4° F – 140° F / RH 95% max.
Backlight Compensation...	BLC / HLC / Off	Dimensions.....	3.7" (W) x 4.17" (H) x 9.7" (L)
Day/Night.....	Color / BW / Auto	Weight	3.08 lbs.
AGC.....	Low / High / Off		

Optional Accessories



Speco Technologies is constantly developing and improving products. We reserve the right to modify product design and specifications without notice and without incurring any obligation.
Spec Rev. 2/12/14