

The Imaging Source "IEEE 1394b" Series Cameras

DMK 23F445 / DFK 23F445



The Imaging Source DMK 23F445 (monochrome) and DFK 23F445 (color) IEEE 1394b cameras are the perfect solution for many industrial automation, quality assurance, security, surveillance, and medical applications. Utilizing the very sensitive SONY Ex View HAD ICX 445ALA/AQA monochrome and color CCD sensors, these cameras feature a variety of input, output, strobe, and trigger options via an external 6-pin Hirose port. With up to 30 fps and a trigger delay of less than 5 micro seconds, the DMK 23F445 and DFK 23F445 IEEE 1394b cameras from The Imaging Source are a low cost, yet highly versatile imaging solution.

Included :

- Camera, CS to C mount adapter and tripod mount
- Drivers compatible to WDM, DirectShow, DirectX®, TWAIN, ActivVisionTools, HALCON, Vfw and LabVIEW® for Windows 7/8, Windows Vista, and Windows XP
- IC Capture camera control and acquisition software for Windows 7/8, Windows Vista, and Windows XP (32 and 64 bit versions)
- IC Imaging Control Software Development Kit (SDK) including a .NET component, an ActiveX component, and a C++ class library for Windows

Features :

- Variable trigger (4µs to 1s)
- Digital I/O strobe
- CS with C mount adapter
- Optional external DC driven auto iris controller

Accessories :

- CS to M12 adapters
- C, CS, and M12 lenses
- 6-pin Hirose trigger cable

Distributed By: Audio Video Supply -- Tel: 1-800-284-2288 -- www.avsupply.com

For design help, accessories or pricing, please contact:
sales@avsupply.com or call: 1-858-565-1101

Specification : DMK 23F445 (Monochrome)

GENERAL BEHAVIOR

Video formats @ Frame rate	1280x960 Y800 @ 30, 20, 15, 7.5, 3.75 fps
	1280x960 Y16 @ 30, 20, 15, 7.5, 3.75 fps
Sensitivity	0.015 lx
Dynamic range	8 / 12 bit

INTERFACE (OPTICAL)

IR cut filter	no
Sensor specification	ICX445ALA
Type	progressive scan
Format	1/3 "
Resolution	H: 1280, V: 960
Pixel size	H: 3.75 μm , V: 3.75 μm
Lens mount	C/CS

INTERFACE (ELECTRICAL)

Supply voltage	8 to 30 VDC
Current consumption	approx. 200 mA at 12 VDC

INTERFACE (MECHANICAL)

Dimensions	H: 29 mm, W: 29 mm, L: 47 mm
Mass	65 g

ADJUSTMENTS (MANUAL)

Shutter	1/100,000 to 30 s
Gain	0 to 36 dB

ADJUSTMENTS (AUTOMATIC)

Shutter	1/100,000 to 30 s
Gain	0 to 36 dB

ENVIRONMENTAL

Max. temperature (operation)	-5 °C to 45 °C
Max. temperature (storage)	-20 °C to 60 °C
Max. humidity (operation)	20 % to 80 % non-condensing
Max. humidity (storage)	20 % to 95 % non-condensing

Specification : DFK 23F445 (Color)

GENERAL BEHAVIOR

Video formats @ Frame rate	1280x960 RGB32 @ 30, 20, 15, 7.5, 3.75 fps 1280x960 Y800 @ 30, 20, 15, 7.5, 3.75 fps 1280x960 Y16 @ 30, 20, 15, 7.5, 3.75 fps
Sensitivity	0.05 lx
Dynamic range	8 bit

INTERFACE (OPTICAL)

IR cut filter	yes
Sensor specification	ICX445AQA
Type	progressive scan
Format	1/3 "
Resolution	H: 1280, V: 960
Pixel size	H: 3.75 μ m, V: 3.75 μ m
Lens mount	C/CS

INTERFACE (ELECTRICAL)

Supply voltage	8 to 30 VDC
Current consumption	approx. 200 mA at 12 VDC

INTERFACE (MECHANICAL)

Dimensions	H: 29 mm, W: 29 mm, L: 47 mm
Mass	65 g

ADJUSTMENTS (MANUAL)

Shutter	1/100,000 to 30 s
Gain	0 to 36 dB
White balance	-2 dB to +6 dB


ADJUSTMENTS (AUTOMATIC)

Shutter	1/100,000 to 30 s
Gain	0 to 36 dB
White balance	-2 dB to +6 dB

ENVIRONMENTAL


Max. temperature (operation)	-5 °C to 45 °C
Max. temperature (storage)	-20 °C to 60 °C
Max. humidity (operation)	20 % to 80 % non-condensing
Max. humidity (storage)	20 % to 95 % non-condensing

Monochrome Spectral Response Curve

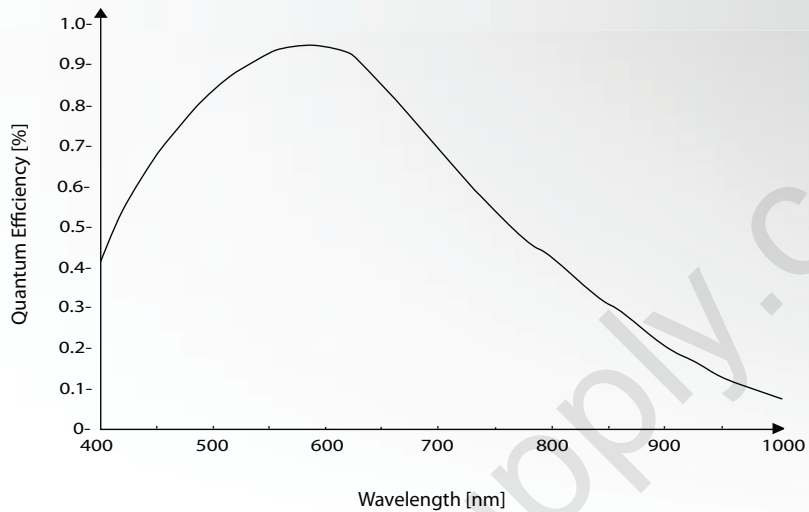

Sensor: Sony ICX 445ALA - courtesy of SONY Deutschland GmbH

Color Spectral Response Curve

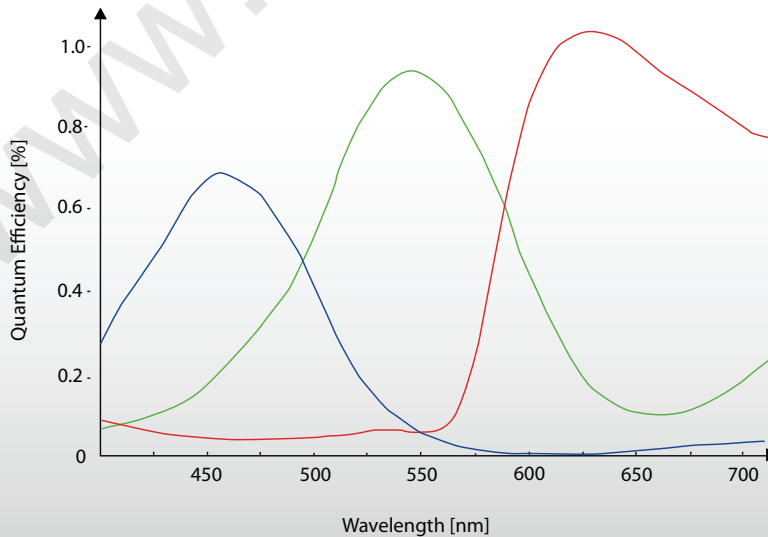

Sensor: Sony ICX 445AQA - courtesy of SONY Deutschland GmbH