


Product Features

- NTSC/PAL auto switchable
- LED Backlight
- TFT active matrix screen
- R.G.B. stripe pixel format
- 640 x 480 pixels
- 12 VDC
- Optional mirror and flip mode (hardware control)

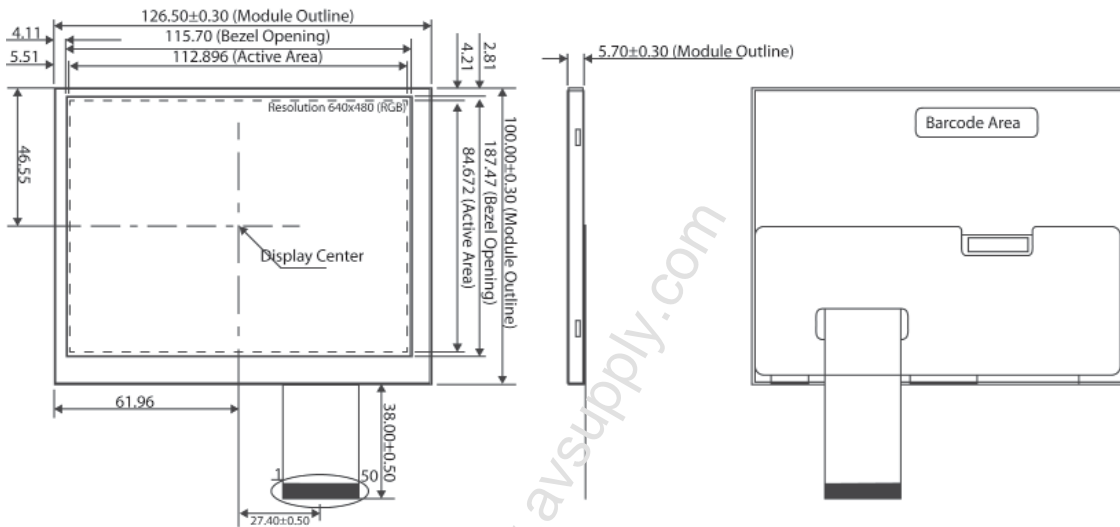

Technical Specifications

Electrical	45S056L
Operating System	NTSC/PAL auto switchable
Picture Size	5.6" diagonal
Resolution (H x V)	640 x 480 pixels
LCD Type	TFT active matrix
Color Configurations	R.G.B. Stripe
Active Area (W x H)	112.89mm x 84.67mm
Dot Pitch (W x H)	0.0588mm x 0.1764mm
Brightness	200 cd/m ²
Contrast Ratio	500:1
Response Time	Tr: 10ms Tf: 15ms
Backlight	LED
Input Signal	1Vp-p composite video at 75 Ohms
Video Angle	Left 70°, Right 70°, Up 50°, Down 70°
Lamp Life-time	20,000 hr min.
Power Source	12VDC ±10%
Power Consumption	3.6W (max)

Environmental

Operating Temperature	0° C ~ 50° C (32° F ~ 122° F)
Storage Temperature	-30° C ~ 85° C (-22° F ~ 185° F)
Operating Humidity	Max. 85% RH
Storage Humidity	Max. 85% RH

Mechanical

Dimensions W x H x D (Panel)	100mm x 126.5mm x 19mm (3.94" x 4.98" x 0.75")
Weight	200g (7.05 oz) panel only
O.S.D. Controls	Contrast, Brightness, Hue (Color), Sharpness, Volume

Accessories

Included	Cables	2 AV-IN 1 12VDC-IN
	Optional	Keyboard control with LED light Mirror and Flip mode (hardware control)

Safety Standards

FCC, CE, UL, RoHS
