



Product Features

- High Brightness 900cd/m² (LED)
- Format 4:3 aspect ratio (640 x 480 pixels)
- NTSC/PAL auto switchable
- LED Backlight
- TFT active matrix

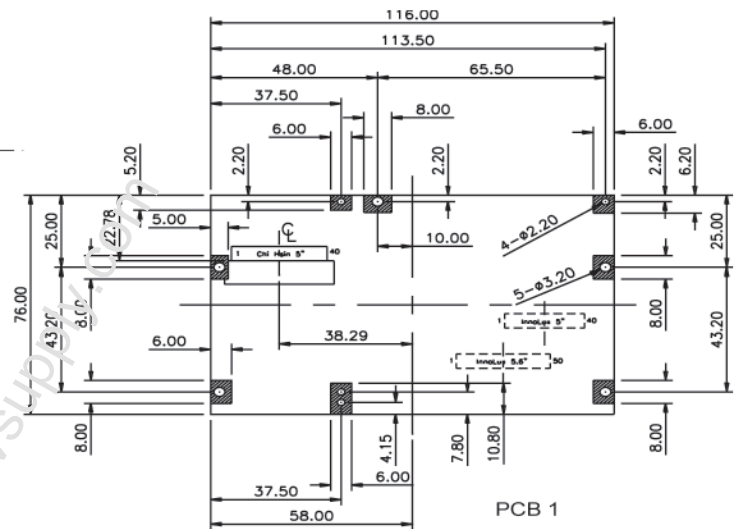

PCB Mechanical Dimension(m/m)

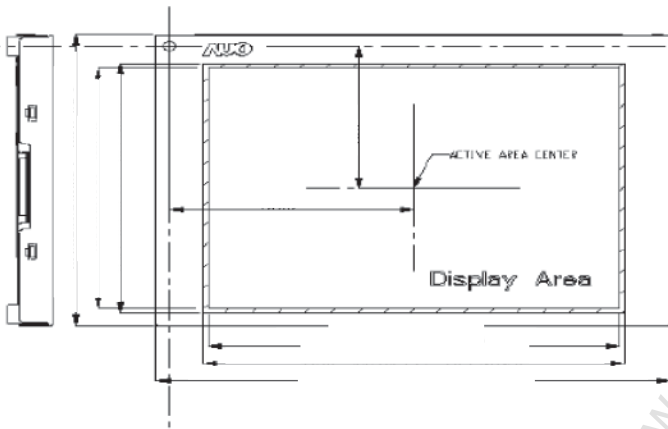

Electrical

45S057

Operating System	NTSC/ PAL auto switchable
Picture Size	5.7" diagonal
Resolution (H x V)	640 x 480 pixels, format 4:3 aspect ratio
LCD Type	TFT active matrix
Color Configuration	262K
Active Area (W x H)	115.2mm x 86.4mm
Dot Pitch (W x H)	0.18mm x 0.18mm
Brightness	900 cd/m ² (LED)
Contrast Ratio	800:1
Response Time	Tr: 15ms Tf: 10ms
Backlight	LED
Input Signal	1Vp-p composite video at 75 Ohms
Viewing Angle	Up 70°, Down 70°, Left 80°, Right 80°
Lamp Life-time	50,000 hr min.
Connectors	Video composite (BNC x 1) HDMI (A type x 1) Audio phone jack, (3.3 x 1) PC VGA (D-SUB 15pin x 1)
O.S.D. Settings	YES
Power Source	12VDC ±10%
Power Consumption	3.6W (max)

Environmental

Operating Temperature	0°C ~ 50°C (32°F ~ 122°F)
Operating Humidity	Max. 85% RH
Storage Temperature	-30°C ~ 85°C (-22°F ~ 185°F)
Storage Humidity	Max. 85% RH

Mechanical

Dimensions W x H x D	144.0mm x 104.6mm x 12.3mm (5.7" x 4.1" x 0.5")
Weight	150g (5.3oz)
O.S.D. Controls	Contrast, Brightness, Hue, Saturation, Sharpness, Mirror, Vertical Flip, Volume

Accessories

Included	Cables	2 AV-IN 1 12VDC-IN
	Keyboard control with LED light	

Safety Standards

	FCC, CE, UL, RoHS
--	-------------------