
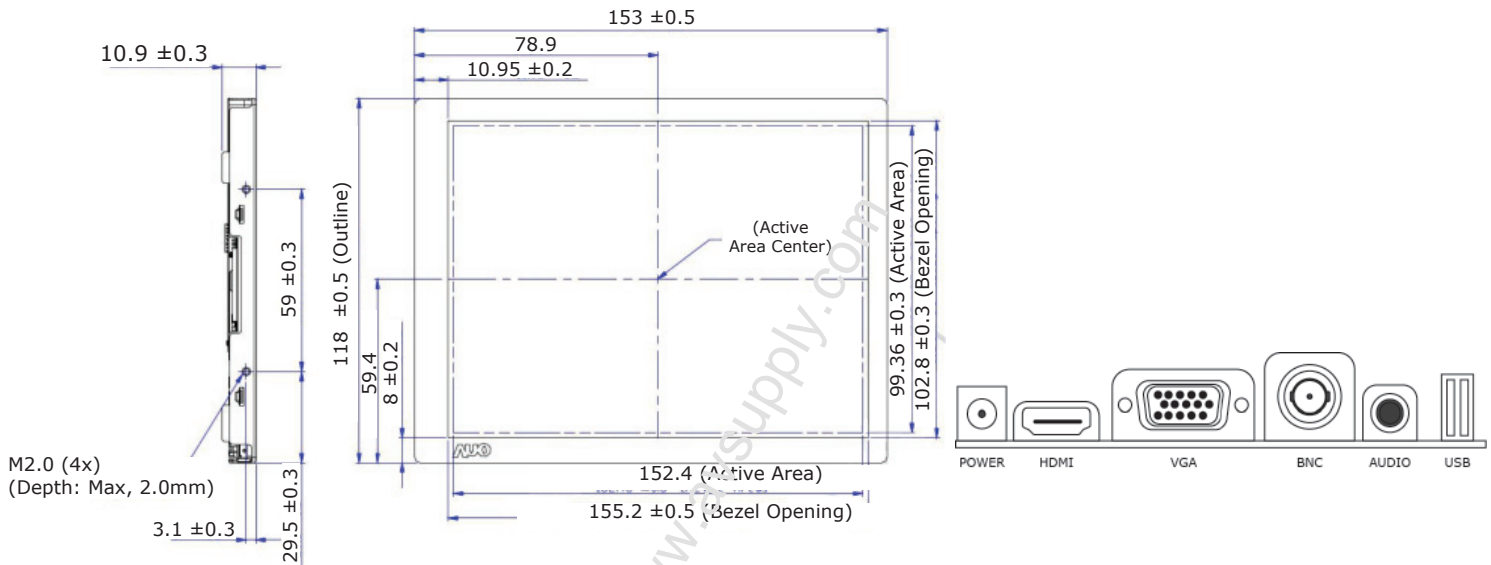


Product Features

- TFT active matrix
- LED backlight
- High resolution (960x234 pixels)
- R.G.B. stripe
- NTSC/ PAL switchable
- Mirror mode
- Vertical flip

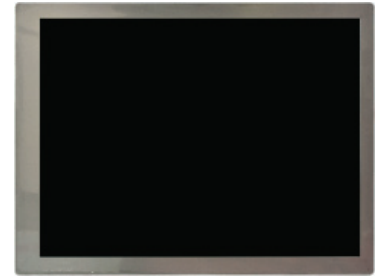

Technical Specifications

Electrical		45S065
Operating System	NTSC/PAL auto switchable	
Picture Size	6.5" diagonal	
Resolution (H x V)	960 x 234 pixels	
LCD Type	TFT active matrix, R.G.B. Stripe	
Color Configuration	R.G.B. Stripe	
Dot Pitch (W x H)	0.207mm x 0.207mm	
Active Area (H x V)	132.48 x 99.36	
Brightness	800 cd/m ²	
Contrast Ratio	600:1	
Response Time	Tr: 15ms (max) Tf: 10ms (max)	
Backlight	LED	
Mirror Mode	On/Off	
Vertical Flip	On/Off	
Input Signal	1Vp-p composite video at 75 Ohms	
Video Angle	Left 80°, Right 80°, Up 70°, Down 70°	
Lamp Life-time	50,000 hr min. @ Temp. 25°C (77°F)	
Power Source	12VDC ±10%	
Power Consumption	5.5W (max)	

Environmental

Operating Temperature	0°C ~ 50°C (32°F ~ 122°F)
Operating Humidity	Max 85%
Storage Temperature	-30°C ~ 80°C (-22°F ~ 176°F)
Storage Humidity	Max 85%

Mechanical

Dimensions W x H x D	153mm x 118mm x 10.9mm (6.02" x 4.65" x 0.43")
Weight	170g (0.37lb) panel only
O.S.D. Controls	Contrast, Brightness, Hue (NTSC only), Saturation, Sharpness, Mirror, Vertical Flip, Volume

Accessories

Included	Cables	2 AV-IN 1 12VDC-IN
	Optional	Keyboard control with LED light

Safety Standards

FCC, CE, UL, RoHS
