
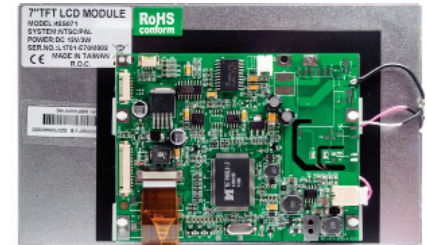


### Product Features

- Tft active matrix
- High resolution (480x234 pixels)
- R.G.B. stripe
- Dual channel
- NTSC/ PAL switchable
- Mirror mode
- Vertical flip

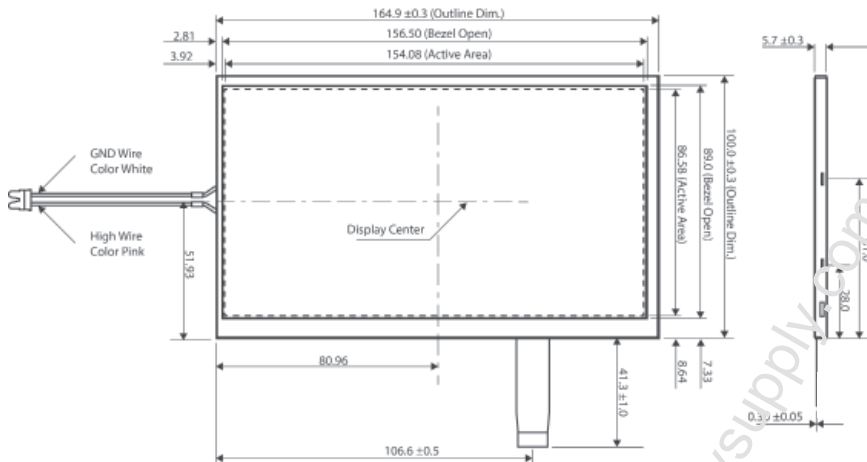

### Technical Specifications

	45S071
<b>Electrical</b>	
Operating System	NTSC/PAL auto switchable
Picture Size	7.0" diagonal
Resolution (H x V)	480 x 234 pixels
LCD Type	TFT active matrix, R.G.B. Stripe
Color Configuration	R.G.B. Stripe
Dot Pitch (W x H)	0.107mm x 0.370mm
Active Area (H x V)	154.08 x 86.59
Brightness	400 NIT
Contrast Ratio	400:1
Response Time	Tr: 12ms (max) Tf: 18ms (max)
Backlight	LED
Mirror Mode	On/Off
Vertical Flip	On/Off
Input Signal	1Vp-p composite video at 75 Ohms
Video Angle	Left 65°, Right 65°, Up 40°, Down 65°
Lamp Life-time	20,000 hr min. (at Temp. 25°C)
Power Source	12VDC ±10%
Power Consumption	3mW

### Environmental

Operating Temp.	0°C ~ 70°C (32°F ~ 158°F)
Operating Humidity	Max 95%
Storage Temp.	-20°C ~ 80°C (-4°F ~ 176°F)
Storage Humidity	Max 95%

### Mechanical

Dimensions W x H x D	164.4mm x 100mm x 18.2mm (6.5" x 3.9" x 0.72")
Weight	465g (16.4oz) panel only
O.S.D. Controls	Contrast, Brightness, Hue (NTSC only), Color, Sharpness, Mirror, Volume, Display Mode (16:9, 4:3)

### Accessories

Included	Cables	2 AV-IN
		1 12VDC-IN
	Keyboard control with LED light	

### Safety Standards

	FCC, CE, UL, RoHS
--	-------------------