



Also Available in Charcoal Gray
(VTC-TNT5RFSB, RFSB-2)





FEATURES:

- 1/2.5" 5.0 Megapixel Progressive Scan CMOS image sensor
- Up to 30fps live view @ 5 MegaPixel (2592x1944)
- 3.6mm or 2.8mm Fixed Iris Lens Options
- 10(3.6mm)/14(2.8mm) IR LEDs w/ 65' IR Range
- 120dB Super Wide Dynamic Range (WDR)
- True Mechanical Day/Night function by ICR
- 3D-DNR Noise Reduction
- Fully Programmable Intelligent Analytics including Face Detection, Object Removal/Museum Search, Line Crossing, and Area Intrusion Detection
- H.265/H.264/MJPEG Triple Streaming
- Secondary Video Output (CVBS)
- Remote Viewing via CMS, Internet Explorer, and iOS & Android Apps
- ONVIF Compliant
- IP66 Weather Resistance
- Optional Wall Mount (VT-TWMT3/B) & Junction Box (VT-TJB01/B) Mounts Available
- 12VDC & PoE (Power over Ethernet) Operation


Intelligent Analytic Features Include:

Facial Detection - Security personnel can find out who entered/left the restricted areas and at what time

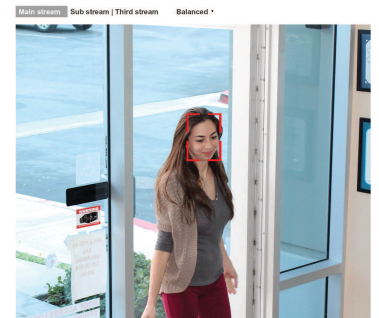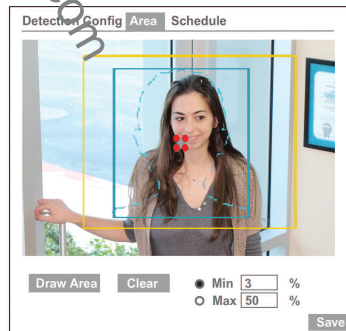

Object Removal (Museum Search) - Sends notifications if an existing object is missing from the camera's view for a period of time

Line Crossing - NVR begins recording and an alert is sent when a line is crossed. Ideal for property monitoring.



Specifications for: VTC-TNT5RFS, VTC-TNT5RFSB (Charcoal), VTC-TNT5RFS-2, VTC-TNT5RFSB-2 (Charcoal)

Image Sensor	1/2.5" 5.0 Megapixel Progressive Scan CMOS
Image Size	5 MegaPixel 2592x1944
Resolution	5 MP (2592x1944) 4 MP (2592x1520) / 3 MP (2304x1296) / 1080P (1920x1080) / 720P (1280x720) / D1/CIF (480x240)
Min. Illumination	0 Lux (IR LED ON)
Lens	2.8mm or 3.6mm Fixed Iris Lens Options
Day/Night	True Day/Night by ICR
IR LEDs	10 (3.6mm) / 14 (2.8mm)
IR Distance	65'
Video Compression	H.265 / H.264 / MJPEG
Audio Compression	G.711A / G.711U
Multi-Stream	1~30fps: 5MP, 4 MP, 3 MP, 1080P, 720P, D1, CIF, 480x240
WDR	120dB Super WDR
DNR	3D-DNR
Quality	VBR (Five Levels of Adjustment) / CBR (Adjustable)
Image Setting	Saturation, Brightness, Contrast, WDR, Noise reduction
Intelligent Analytics	Face Detection, Object Removal, Museum Search, Exception, Line Crossing, Smart Intrusion, People Intrusion, People Counting, Crowd Density
Smart Alarm	Motion Alarm
ROI	Max 8 detailed areas can be viewed
Network	RJ45
Video Output	1 x BNC (CVBS)
Audio	1 x IN (One-way Audio)
Remote Viewing	GPS / Web Browser / Mobile (iOS/Android)
Supported Browsers	Internet Explorer, Chrome and Firefox with IE Tab
Connection Protocol	ONVIF
Weather Resistance	IP66
Power Input	12VDC / PoE
Power Consumption (12VDC)	210mA (IR Off) / 420mA (IR On)
Power Consumption (PoE)	4W (IR's off) / 6.7W (IR's on)
Working Environment	-4 ~ 122 / 10% ~ 90% Humidity
Weight	15.17 oz. / 0.95 lbs. / 430g
Dimensions	3.60" x 4.25" (91.4 x 108mm) H x Dia



Use with VITEK Transcendent Series Real Time Network Video Recorders



Transcendent 16 & 32Ch NVRs, models VT-TR1616F & TNR3216PF with Facial Detection Support

VT-TWMT3/B

Optional Wall Mount for use with Transcendent Fixed Vandal Dome and Turret Cameras



VT-TJB01/B

Optional Junction Box for Cable Management for use with all Transcendent Bullet and Turret Style Cameras

