WAT-2300 1/2.8" HD-TVI Color Camera

Full HD CMOS sensor






Key features


- 1/2.8-inch 2M CMOS image sensor with 0.1 lux native light sensitivity
- Digital interface HD-TVI without latency and degradation, HD resolution of 1080p30 Full HD
- Long transmission distance without boost (3C-2V:150m, 5C-2V:300m)
- Existing infrastructure doesn't need to be replaced, just change their old analog cameras and DVRs to TVI cameras and DVRs to get a brand new 1080p surveillance system without extra cost
- White blemish correction, Defog, Mirror Image, RS-232 compatible
- OSD (On screen display) Easy installation through a controller provided in kit

Dimensions

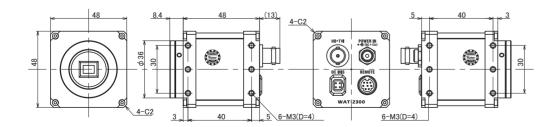

	Pick-up element	1/2.8-inch CMOS image sensor
	Number of total pixels	1952(H) × 1236(V)
	Number of effective pixels	1080i/1080p: 1920(H) × 1080(V) / 720p: 1280(H) × 720(V)
	Unit cell size	2.8 μ m × 2.8 μ m
	Imaging system	RGB+W array mosaic filters on chip
	Synchronizing system	Internal
	Scanning System	Progressive
	Video Output	HD-TVI
	Output format	1080/30p, 1080/25p, 720/60p, 720/50p, 720/30p, 720/25p
	Minimum Illumination	0.1 lx F1.2
	S/N	More than 50dB
	Function settings	OSD (On Screen Display) / RS-232, Remote controller
M. avsupp	AE mode	E.I+AGC, AGC, FL, MANUAL
	Shutter speed	OFF, FL, 1/200, 1/500, 1/1000, 1/2000, 1/5000, 1/10000 sec.
	Flickerless mode	AUTO, 50Hz, 60Hz, OFF
	White balance	ATW, PWB, Preset, MANUAL
	AGC	HIGH, MEDIUM, LOW
	MGC	0 – 30dB
	Gamma characteristics	ON / OFF
	Noise reduction	HIGH, MEDIUM, LOW, OFF
	Wide dynamic range	ON (ATR) / OFF
	Lens iris	DC
	Back light compensation	ON / OFF
	White blemish correction	Max. 1023 dots
	Defog	ON / OFF
	Mirror image	ON (H-FLIP, V-FLIP, ROTATE) / OFF
	Power supply	DC+12V±10%
	Power consumption	1.92W/160mA (720p60)
	Operating temperature	-10 - +50°C
	Storage temperature	-30 - +70°C
	Operating / Storage humidity	95% RH or less (Without condensation)
	Lens mount	CS mount (Back focus adjustable)
	Weight	Approx. 130g
	Accessories	WPDC12-R (DC plug), Hex. wrench, RC-02 (Remote controller), Tripod adaptor

Specifications

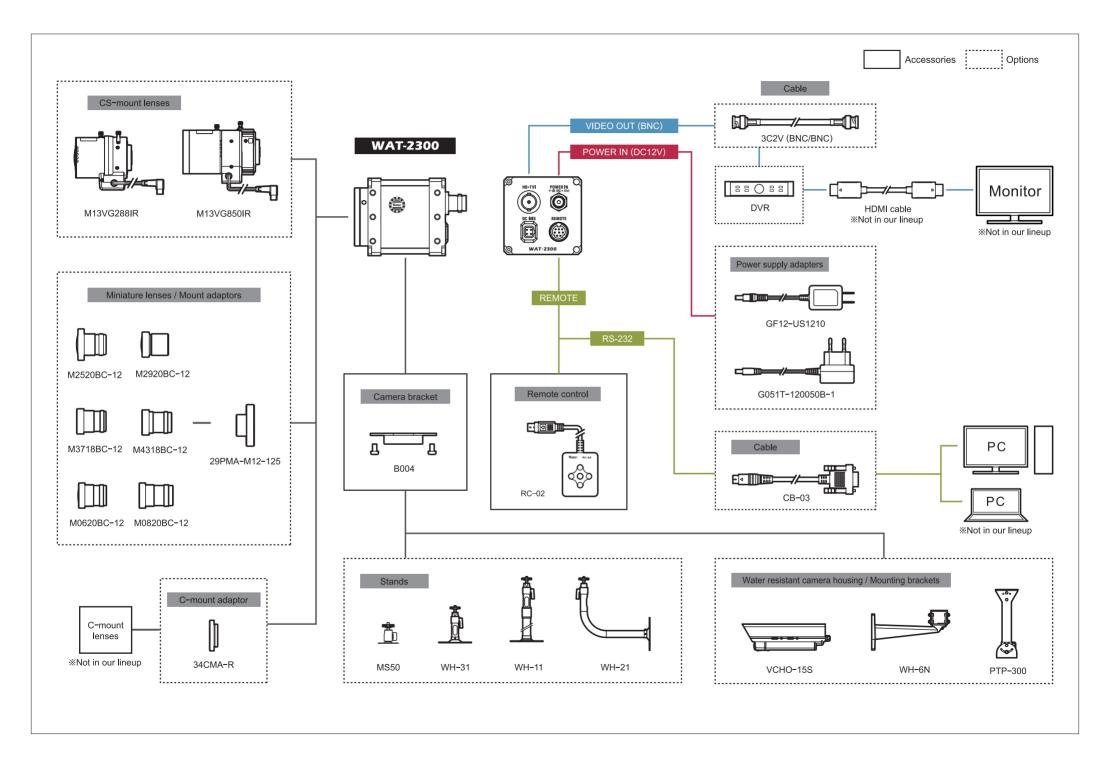

www.avsupply.com | email: sales@avsupply.com | Ph: 858.565.1101