7″ LCD Monitor with VGA Input

WDL-7002M

- Digital panel
- Weatherproof high resolution TFT LCD monitor (with remote control, mounting bracket and accessories)
- Composite, VGA video inputs
- Selectable mirror-image mode
- Active matrix for absolute picture clarity
- OSD for AV source (color, brightness, contrast, tint & volume control)
- NTSC and PAL
- Integrated audio speaker
- Wide range input voltage (DC 12V~32V)

SPECIFICATION

Screen size
7.0″ (diagonal)

LCD Type
TFT-LCD Color

Contrast ratio
500:1

Brightness
400cd/㎡

MTBF
100,000 Hours

Viewing angle
Up:50˚ / Down:70˚ / Right:70˚ / Left:70˚

Input signal feature
Composite (75Ω)

Power consumption
9.6W (Monitor only)

Size (W x D x H)
7.7″ x 1.3″ x 5.7″

Power source
DC12V ~ 32V

Temperature (working)
-4˚F ~ +176˚F (-20˚C ~ +70˚C)

Temperature (storage)
-22˚F ~ +186˚F (-30˚C ~ +80˚C)

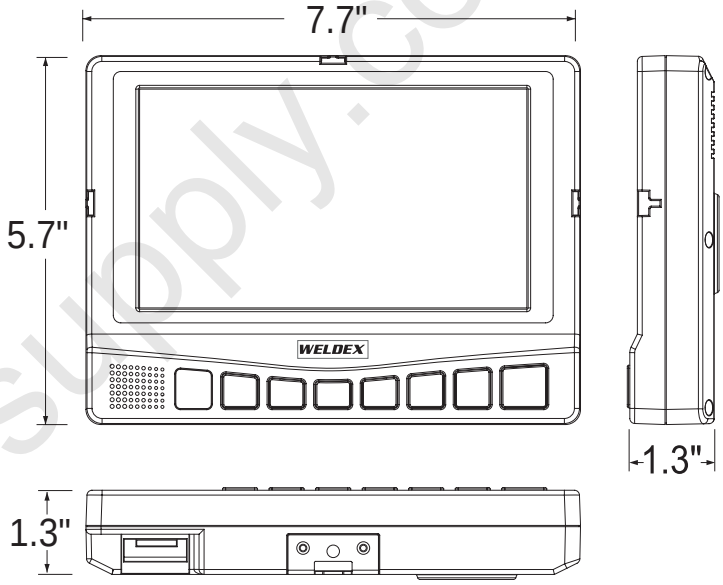

[7 Inch Series]

www.avsupply.com

Distributed By: Audio Video Supply -- Tel: 1-800-284-2288 -- www.avsupply.com

© 2014 Weldex

6751 Katella Avenue, Cypress, CA 90630 [USA]
Broichhof Strasse 5 D-40880 Ratingen, Germany [GER]

weldex.com
oem@weldex.com
Tel: (714) 761-2100 [USA]
Fax:(714) 761-3811 [USA]
Tel:+49 (0)2102 528 2803 [GER]
Fax:+49 (0)2102 528 2804 [GER]

For design help, accessories or pricing, please contact:
sales@avsupply or call: 1-858-565-1101

AUDIO VIDEO SUPPLY
1-800-284-2288 sales@avsupply.com
www.avsupply.com

DIMENSIONS

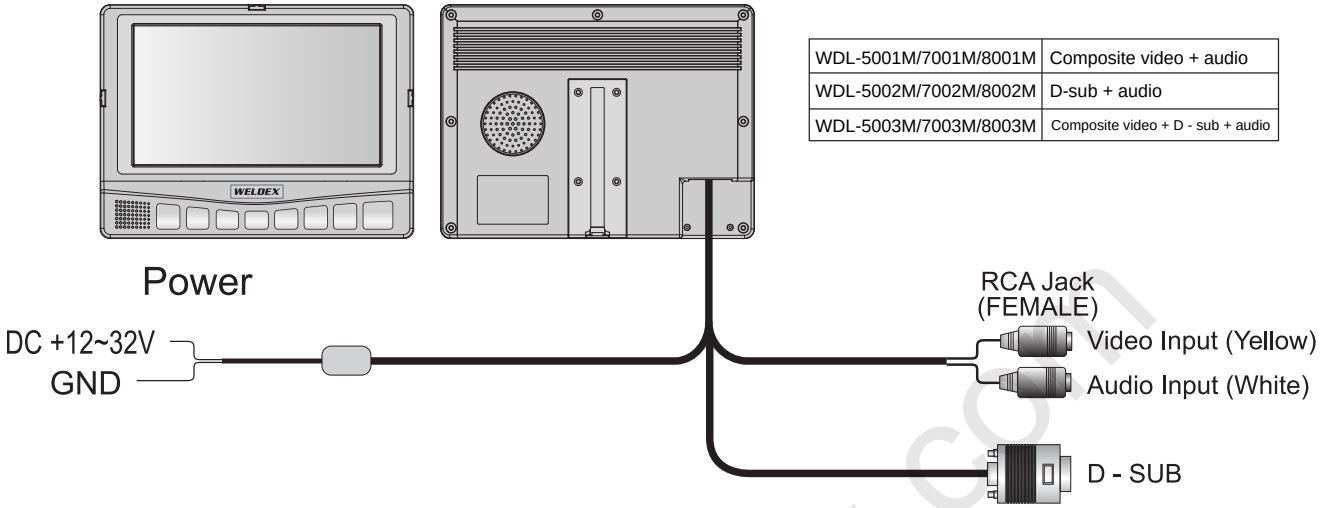

WDL-5001M/7001M/8001M	Composite video + audio
WDL-5002M/7002M/8002M	D-sub + audio
WDL-5003M/7003M/8003M	Composite video + D - sub + audio

www.avsupply.com

Distributed By: Audio Video Supply -- Tel: 1-800-284-2288 -- www.avsupply.com

© 2014 Weldex

6751 Katella Avenue, Cypress, CA 90630 [USA]
Broichhof Strasse 5 D-40880 Ratingen, Germany [GER]

weldex.com
oem@weldex.com
Tel: (714) 761-2100 [USA]
Fax:(714) 761-3811 [USA]
Tel:+49 (0)2102 528 2803 [GER]
Fax:+49 (0)2102 528 2804 [GER]

WELDEX

For design help, accessories or pricing, please contact:
sales@avsupply or call: 1-858-565-1101