

# 7" Touch Screen LCD Monitor with Integrated Audio

WDL-7002TCM



- Touch screen digital panel
- Weatherproof high resolution TFT LCD monitor (with remote control, mounting bracket and accessories)
- composite, VGA video inputs
- Selectable mirror-image mode
- Active matrix for absolute picture clarity
- OSD for AV source (color, brightness, contrast, tint & volume control)
- NTSC and PAL
- Integrated audio speaker
- Wide range input voltage (DC12V ~ 32V)

## SPECIFICATION

**Touch screen**  
Resistive

**Screen size**  
7.0" (diagonal)

**Resolution**  
800(W) x 480(H)

**Contrast ratio**  
500:1

**Brightness**  
400cd/m<sup>2</sup>

**Dot pitch (mm)**  
0.0642(W) x 0.1790(H)mm

**Active area (mm)**  
154.08(W) x 85.92(H)mm

**Viewing angle**  
Up:50°, down:70°, right:70°, left:70°

**Dimensions**  
7.7"(W) x 5.7"(H) x 1.3"(D)


**Color system**  
NTSC/PAL

**Video input**  
1 x VGA, 1 x composite

**Audio input**  
1 x mono audio

**Power consumption**  
DC12V, 500mA

**Operating temperature**  
-30°C ~ +80°C (-22°F ~ +176°F)

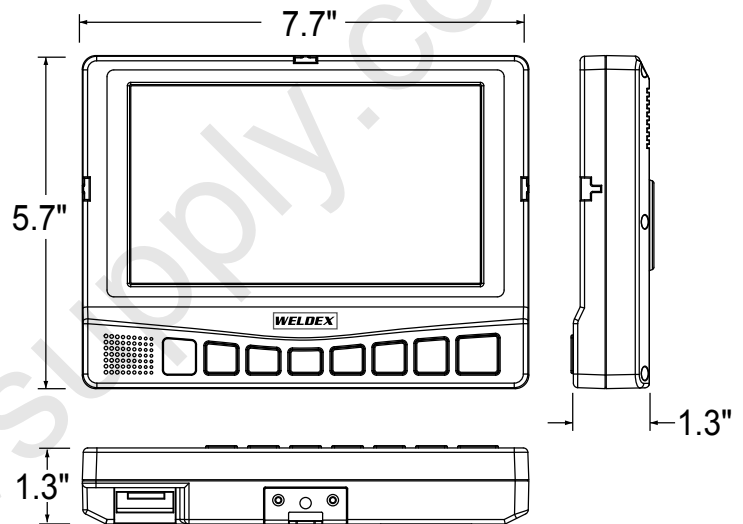

Distributed By: Audio Video Supply -- Tel: 1-800-284-2288 -- www.avsupply.com

weldex.com  
oem@weldex.com  
Tel: (714) 761-2100 [USA]  
Fax: (714) 761-3811 [USA]  
Tel: +49 (0)2102 528 2803 [GER]  
Fax: +49 (0)2102 528 2804 [GER]

For design help, accessories or pricing, please contact:  
sales@avsupply or call: 1-858-565-1101



1-800-284-2288 sales@avsupply.com  
www.avsupply.com

© 2014 Weldex  
6751 Katella Avenue, Cypress, CA 90630 [USA]  
Broichhof Strasse 5 D-40880 Ratingen, Germany [GER]