


Weldex 10" IP EPVM



WDL-EVPM10

- High quality and cost-effective
- Low power consumption for cost savings
- Built-in WDR HD camera with motion sensing
- Built-in Removable SD card for displaying advertising or corporate message
- on-board DVR included with SD card slot
- Switch between camera video and display advertisement on motion activity
- User definable text warning message
- Built-in alarm I/O
- Compatible management S/W (verint nextiva 6.x, march video sphere R5)

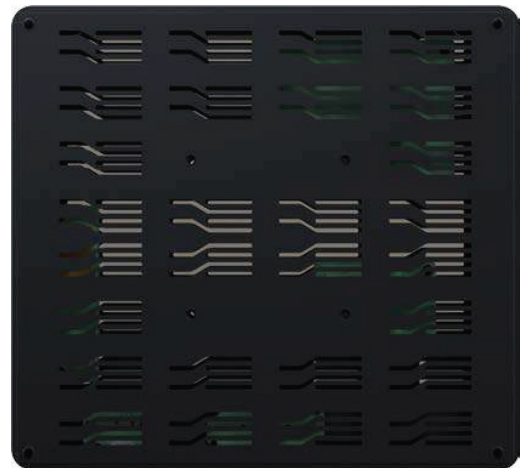

Distributed By: Audio Video Supply -- Tel: 1-800-284-2288 -- www.avsupply.com

Specification

| | Section | 10" EPVM | |
|---------------|-----------------------|--|---------------------------------|
| Display | Screen size | 10.4" | |
| | Resolution | 800×600 | |
| | Brightness | 450 cd/m ² | |
| | Contrast ratio | 300 : 1 | |
| | Response time | < 30ms | |
| | Viewing angle | 150(H) / 110(V) | |
| | Aspect ratio | 16:9 | |
| Camera | Image sensor | 1/2.7" omnivision 1.3M progressive C-MOS | |
| | Lens | Fixed 3.7mm F2.0 | |
| | Active pixel | 1280(H)×720(V) | |
| | Frame rate | 30 fps | |
| | Shutter | Rolling shutter | |
| | Wide dynamic range | 115 dB | |
| | Sensitivity | 3650 mV/Lux-sec | |
| Interface | Storage | DVR | Internal micro SD card slot |
| | | Storage media | External SD card slot |
| | Alarm I/O | | Terminal block 4P |
| | Speaker | | 1W mono speaker |
| | User I / F | User input I/F | Remote controller (coming soon) |
| | | Indicators | Power, record LEDs |
| | Mount | | VESA™ 75×75mm |
| Power | Power adapter | 12VDC 4A | |
| | Power consumption | < 0.7A | |
| Environmental | Operating temperature | 0°C ~ 50°C | |
| | Humidity | 10 ~ 90% RH, non condensing | |
| Dimensions | Outline dimension | 254mm(W)×232mm(H)×28mm(D) | |
| | Weight | - | |

Dimensions

