

Super Dynamic 6 Day/Night Dome Camera WV-CS580 Series

 INTSC
 WV-CS584 (24 v Ac)
 PAL
 WV-CS580 (220 ~ 240 v Ac)
 WV-CS584 (24 v Ac)



All-in-one 24-hour surveillance camera featuring 36x zoom and *Super Dynamic* 6 technology

Key Features

- Super Dynamic 6 technology delivers 128x(NTSC) / 160x (PAL) wider dynamic range compared to conventional cameras.
- High resolution: 650 TV lines
- High sensitivity with Day/Night function: 0.5 lx (Color) at F1.4 (Wide), 0.04 lx (B/W) at F1.4 (Wide). IR cut filter switches on/off to enhance the sensitivity in B/W mode.
- Adaptive Digital Noise Reduction: Integration of 2D-DNR and 3D-DNR ensures noise reduction in various conditions.
- Electronic sensitivity enhancement: Auto (Up to 32x) / Manual (Up to 512x)
- Electronic shutter from 1/100(NTSC), 1/120 (PAL) to 1/10,000 s
- 36x zoom lens: 3.3 ~ 119 mm (approx. 720x with digital zoom)
- Pan/Tilt speed of max. 400°/s at preset mode and 0.065°/s super fine control at manual mode
- 5 degrees upper view for various applications
- 256 preset positions that can be activated from the system controller with a switcher or recorder (specific models).
- Auto tracking: The camera follows the largest movement in the image automatically. The camera will pan and tilt to keep the subject in the center of the image.
- VMD (Video Motion Detector) with Mask 8 x 6 areas
- Scene Change Detection alarms when lens is covered, spray painted, removed or defocused.
- 4 alarm inputs and 2 outputs terminals
- Alarm actions include Terminal output, Camera positioning, Auto pan, Patrol, SEQ, Sort, Auto track, B/W and command output.
- Auto Image Stabilizer for applications where vibration or wind is a concern.
- Internal <NTSC/PAL> / Multiplexed Vertical Drive (VD2) <NTSC> synchronization

- Over the coaxial cable or RS485 data (Panasonic, Pelco P/D Protocol) communication
- 16 alphanumerics camera title display
- Multi language: English, French, Italian, Spanish, German, Russian, Chinese, Japanese

Standard Accessories

• CD-ROM* 1 pc.

- 1 pc. The following items are for installation.
 - Decorative Cover 1 pc.
 - Dust Protection Sheet 1 pc.

*The CD-ROM contains the operating instructions (PDF).


Optional Accessory




Specifications

TV System	<u> </u>	NTSC	PAL
Camera	Image Sensor	1/4 type interline transfer CCD	
	Effective Pixels	976 (H) x 494 (V)	976 (H) x 582 (V)
	Scanning Mode	2:1 interlace	
	Scanning Area	3.66 mm(H) x 2.74 mm (V) (5/32"(H) x 3/32"(V))	3.66 mm(H) x 2.73 mm (V) (5/32"(H) x 3/32"(V))
	Scanning Frequency	Horizontal: 15.734 kHz Vertical: 59.94 Hz	Horizontal: 15.625 kHz Vertical: 50 Hz
	Horizontal Resolution	650 TV lines	
	Minimum Illumination	Color : 0.5 lx, B/W: 0.04 lx	
	Signal-to-Noise Ratio	52 dB minimum (AGC: OFF)	
	White Balance	AWC (2,000 ~ 10,000 K), ATW1 (2,700 ~ 8,000 K), ATW2 (2,400 ~ 8,000 K)	
	Light Control	ALC (Adjustable OPEN/CLOSE output target level) / MANUAL	
	AGC	ON (LOW, MID, HIGH) / OFF	
	Super Dynamic 6	ON / OFF	
	Dynamic Range	52 dB typical (Super Dynamic 6 : ON)	54 dB typical (Super Dynamic 6 : ON)
	Electronic Shutter	OFF (1/60), AUTO, 1/100, 1/250, 1/500,	OFF (1/50), AUTO, 1/120, 1/250, 1/500
		1/1,000, 1/2,000, 1/4,000, 1/10,000	1/1,000, 1/2,000, 1/4,000, 1/10,000
	Electronic Sensitivity UP	32x max. AUTO, 512x max. FIX	
	Digital Noise Reduction	High or Low	
	Black and White Mode	Auto / ON / OFF	
	Scene File	10 patterns (Shutter, AGC, Sens UP,	White balance, VMD)
	Scene Select Setting	INDOOR (L) / INDOOR (H) / OUTDOO	
	Video Motion Detection	OFF / MOTION DET / SCENE CHANGE	
	Privacy Zone	ON / OFF (8 zone settings)	
	Auto Image Stabilizer	ON / OFF	
	Camera Title	16 alphanumeric characters	
		MANUAL / AUTO (PAN,TILT,ZOOM linked)	
	Auto Focus		
	Synchronization	Internal (INT), Multiplexed Vertical Drive (VD2) Internal (INT)	
Lens	Focal Length	3.3 mm ~ 119 mm	
Pan and	Zoom Ration	36x (Approx. 720x with digital zoom)	
	Zoom Speed	approx. 6.0 seconds (Tele ~ Wide) in manual mode	
	Zoom Limit	1x ~ 720x (Over 36x is digital zoom)	
	Angular Field of View	H: 1.7° (Tele) ~ 60.2° (Wide), V: 1.3° (Tele) ~ 46.0° (Wide)	
	Maximum Aperture Ratio	1:1.4 (Wide) ~ 4.2 (Tele)	
	Focusing Range	1.8m (5.9ft.) ~ ∞	
	Aperture Range	F1.4 ~ 22, Close	
	Panning Range		
		360° endless	
		360° endless Manual: approx. 0.065 °/s ~ 120 °/s.	8 steps, 16 steps, 64 steps,
Tilt	Panning Speed *1	Manual: approx. 0.065 °/s ~ 120 °/s,	8 steps, 16 steps, 64 steps,
	Panning Speed *1	Manual: approx. 0.065 °/s ~ 120 °/s, Preset: approx. 400 °/s	
	Panning Speed *1 Tilting Range	Manual: approx. 0.065 °/s ~ 120 °/s, Preset: approx. 400 °/s -5° ~ 185° (horizontal - vertical - horiz	zontal) (According to the TILT ANGLE)
	Panning Speed *1	Manual: approx. 0.065 °/s ~ 120 °/s, Preset: approx. 400 °/s -5° ~ 185° (horizontal - vertical - horiz Manual: approx. 0.065 °/s ~ 120 °/s,	zontal) (According to the TILT ANGLE
	Panning Speed *1 Tilting Range Tilting Speed *1	Manual: approx. 0.065 °/s ~ 120 °/s, Preset: approx. 400 °/s -5° ~ 185° (horizontal - vertical - horiz Manual: approx. 0.065 °/s ~ 120 °/s, Preset: approx. 400 °/s	zontal) (According to the TILT ANGLE
	Panning Speed *1 Tilting Range Tilting Speed *1 Proportional Pan/Tilt Control	Manual: approx. 0.065 °/s ~ 120 °/s, Preset: approx. 400 °/s -5° ~ 185° (horizontal - vertical - horiz Manual: approx. 0.065 °/s ~ 120 °/s, Preset: approx. 400 °/s ON / OFF	zontal) (According to the TILT ANGLE)
	Panning Speed *1 Tilting Range Tilting Speed *1 Proportional Pan/Tilt Control Number of Preset Positions	Manual: approx. 0.065 °/s ~ 120 °/s, Preset: approx. 400 °/s -5° ~ 185° (horizontal - vertical - horiz Manual: approx. 0.065 °/s ~ 120 °/s, Preset: approx. 400 °/s ON / OFF 256	zontal) (According to the TILT ANGLE) 8 steps, 16 steps, 64 steps,
	Panning Speed *1 Tilting Range Tilting Speed *1 Proportional Pan/Tilt Control Number of Preset Positions Auto Mode	Manual: approx. 0.065 °/s ~ 120 °/s, Preset: approx. 400 °/s -5° ~ 185° (horizontal - vertical - horiz Manual: approx. 0.065 °/s ~ 120 °/s, Preset: approx. 400 °/s ON / OFF 256 OFF, SEQ, SORT, AUTO PAN, PATR	zontal) (According to the TILT ANGLE) 8 steps, 16 steps, 64 steps,
	Panning Speed *1 Tilting Range Tilting Speed *1 Proportional Pan/Tilt Control Number of Preset Positions Auto Mode Auto Track	Manual: approx. 0.065 °/s ~ 120 °/s, Preset: approx. 400 °/s -5° ~ 185° (horizontal - vertical - horiz Manual: approx. 0.066 °/s ~ 120 °/s, Preset: approx. 400 °/s ON / OFF 256 OFF, SEQ, SORT, AUTO PAN, PATR Standard Auto Track	zontal) (According to the TILT ANGLE 8 steps, 16 steps, 64 steps,
	Panning Speed *1 Tilting Range Tilting Speed *1 Proportional Pan/Tilt Control Number of Preset Positions Auto Mode Auto Track Patrol	Manual: approx. 0.065 °/s ~ 120 °/s, Preset: approx. 400 °/s -5° ~ 185° (horizontal - vertical - horiz Manual: approx. 0.065 °/s ~ 120 °/s, Preset: approx. 400 °/s ON / OFF 256 OFF, SEQ, SORT, AUTO PAN, PATR Standard Auto Track STOP / PLAY / LEARN	zontal) (According to the TILT ANGLE 8 steps, 16 steps, 64 steps,
	Panning Speed *1 Tilting Range Tilting Speed *1 Proportional Pan/Tilt Control Number of Preset Positions Auto Mode Auto Track	Manual: approx. 0.065 °/s ~ 120 °/s, Preset: approx. 400 °/s -5° ~ 185° (horizontal - vertical - horiz Manual: approx. 0.066 °/s ~ 120 °/s, Preset: approx. 400 °/s ON / OFF 256 OFF, SEQ, SORT, AUTO PAN, PATR Standard Auto Track	zontal) (According to the TILT ANGLE 8 steps, 16 steps, 64 steps,
	Panning Speed *1 Tilting Range Tilting Speed *1 Proportional Pan/Tilt Control Number of Preset Positions Auto Mode Auto Track Patrol Image Hold Digital Flip	Manual: approx. 0.065 °/s ~ 120 °/s, Preset: approx. 400 °/s -5° ~ 185° (horizontal - vertical - horiz Manual: approx. 0.065 °/s ~ 120 °/s, Preset: approx. 400 °/s ON / OFF 256 OFF, SEQ, SORT, AUTO PAN, PATR Standard Auto Track STOP / PLAY / LARN ON / OFF ON / OFF	zontal) (According to the TILT ANGLE 8 steps, 16 steps, 64 steps,
	Panning Speed *1 Tilting Range Tilting Speed *1 Proportional Pan/Tilt Control Number of Preset Positions Auto Mode Auto Track Patrol Image Hold	Manual: approx. 0.065 °/s ~ 120 °/s, Preset: approx. 400 °/s -5° ~ 185° (horizontal - vertical - horiz Manual: approx. 0.065 °/s ~ 120 °/s, Preset: approx. 400 °/s ON / OFF 256 OFF, SEQ, SORT, AUTO PAN, PATR Standard Auto Track STOP / PLAY / LEARN ON / OFF	zontal) (According to the TILT ANGLE) 8 steps, 16 steps, 64 steps,
	Panning Speed *1 Tilting Range Tilting Speed *1 Proportional Pan/Tilt Control Number of Preset Positions Auto Mode Auto Track Patrol Image Hold Digital Flip	Manual: approx. 0.065 °/s ~ 120 °/s, Preset: approx. 400 °/s -5° ~ 185° (horizontal - vertical - horiz Manual: approx. 0.065 °/s ~ 120 °/s, Preset: approx. 400 °/s ON / OFF 256 OFF, SEQ, SORT, AUTO PAN, PATR Standard Auto Track STOP / PLAY / LARN ON / OFF ON / OFF	zontal) (According to the TILT ANGLE 8 steps, 16 steps, 64 steps,
Tilt	Panning Speed *1 Tilting Range Tilting Speed *1 Proportional Pan/Tilt Control Number of Preset Positions Auto Mode Auto Mode Auto Track Patrol Image Hold Digital Flip Area Title	Manual: approx. 0.065 °/s ~ 120 °/s, Preset: approx. 400 °/s -5° ~ 185° (horizontal - vertical - horiz Manual: approx. 0.066 °/s ~ 120 °/s, Preset: approx. 400 °/s ON / OFF 256 OFF, SEQ, SORT, AUTO PAN, PATR Standard Auto Track STOP / PLAY / LEARN ON / OFF 0N / OFF 8 area titles, 16 characters/area	zontal) (According to the TILT ANGLE 8 steps, 16 steps, 64 steps, iOL, AUTO TRACK
Tilt	Panning Speed *1 Tilting Range Tilting Speed *1 Proportional Pan/Tilt Control Number of Preset Positions Auto Mode Auto Track Patrol Image Hold Digital Flip Area Title Preset Alarm Alarm Source	Manual: approx. 0.065 °/s ~ 120 °/s, Preset: approx. 400 °/s -5° ~ 185° (horizontal - vertical - horiz Manual: approx. 0.065 °/s ~ 120 °/s, Preset: approx. 400 °/s ON / OFF 256 OFF, SEQ, SORT, AUTO PAN, PATR Standard Auto Track STOP / PLAY / LEARN ON / OFF 8 area titles, 16 characters/area ON / OFF Terminal input, VMD, Command alar	ntal) (According to the TILT ANGLE 8 steps, 16 steps, 64 steps, 0L, AUTO TRACK
Tilt	Panning Speed *1 Tilting Range Tilting Speed *1 Proportional Pan/Tilt Control Number of Preset Positions Auto Mode Auto Mode Auto Track Patrol Image Hold Digital Flip Area Tilte Preset Alarm	Manual: approx. 0.065 °/s ~ 120 °/s, Preset: approx. 400 °/s -5° ~ 185° (horizontal - vertical - horiz Manual: approx. 0.065 °/s ~ 120 °/s, Preset: approx. 400 °/s ON / OFF 256 OFF, SEQ, SORT, AUTO PAN, PATR Standard Auto Track STOP / PLAY / LEARN ON / OFF 0N / OFF 8 area titles, 16 characters/area ON / OFF Terminal input, VMD, Command alar Preset position 1 ~ 4, PATROL 1 ~ 4	ntal) (According to the TILT ANGLE 8 steps, 16 steps, 64 steps, 0L, AUTO TRACK
Tilt	Panning Speed *1 Tilting Range Tilting Speed *1 Proportional Pan/Tilt Control Number of Preset Positions Auto Mode Auto Track Patrol Image Hold Digital Flip Area Title Preset Alarm Alarm Source Alarm Actions	Manual: approx. 0.065 °/s ~ 120 °/s, Preset: approx. 400 °/s -5° ~ 185° (horizontal - vertical - horiz Manual: approx. 0.066 °/s ~ 120 °/s, Preset: approx. 400 °/s ON / OFF 256 OFF, SEQ, SORT, AUTO PAN, PATR Standard Auto Track STOP / PLAY / LEARN ON / OFF 0N / OFF 8 area titles, 16 characters/area ON / OFF Terminal input, VMD, Command alar Preset position 1 ~ 4, PATROL 1 ~ 4 AUTO PAN, B/W	zontal) (According to the TILT ANGLE) 8 steps, 16 steps, 64 steps, OL, AUTO TRACK m , AUTO TRACK 1 ~ 4, SEQ, SORT,
Alarm Input /	Panning Speed *1 Tilting Range Tilting Speed *1 Proportional Pan/Tilt Control Number of Preset Positions Auto Mode Auto Track Patrol Image Hold Digital Flip Area Title Preset Alarm Alarm Source	Manual: approx. 0.065 °/s ~ 120 °/s, Preset: approx. 400 °/s -5° ~ 185° (horizontal - vertical - horiz Manual: approx. 0.066 °/s ~ 120 °/s, Preset: approx. 400 °/s ON / OFF 256 OFF, SEQ, SORT, AUTO PAN, PATR Standard Auto Track STOP / PLAY / LEARN ON / OFF ON / OFF 8 area titles, 16 characters/area ON / OFF Terminal input, VMD, Command alar Preset position 1 ~ 4, PATROL 1 ~ 4 AUTO PAN, B/W 1.0 V [p-p] / NTSC composite 75 /	m AUTO TRACK 1 ~ 4, SEQ, SORT, 1.0 V [p-p] / PAL composite 75 /
Alarm Input /	Panning Speed *1 Tilting Range Tilting Speed *1 Proportional Pan/Tilt Control Number of Preset Positions Auto Mode Auto Track Patrol Image Hold Digital Flip Area Title Preset Alarm Alarm Source Alarm Actions Video Output	Manual: approx. 0.065 °/s ~ 120 °/s, Preset: approx. 400 °/s -5° ~ 185° (horizontal - vertical - horiz Manual: approx. 0.065 °/s ~ 120 °/s, Preset: approx. 400 °/s ON / OFF 256 OFF, SEQ, SORT, AUTO PAN, PATR Standard Auto Track STOP / PLAY / LEARN ON / OFF ON / OFF 8 area titles, 16 characters/area ON / OFF Terminal input, VMD, Command alar Preset position 1 ~ 4, PATROL 1 ~ 4 AUTO PAN, B/W 1.0 V [p-p] / NTSC composite 75 / BNC Connector	zontal) (According to the TILT ANGLE 8 steps, 16 steps, 64 steps, OL, AUTO TRACK m , AUTO TRACK 1 ~ 4, SEQ, SORT,
Alarm Input /	Panning Speed *1 Tilting Range Tilting Speed *1 Proportional Pan/Tilt Control Number of Preset Positions Auto Mode Auto Mode Auto Track Patrol Image Hold Digital Flip Area Title Preset Alarm Alarm Source Alarm Actions Video Output Controller Interface	Manual: approx. 0.065 °/s ~ 120 °/s, Preset: approx. 400 °/s -5° ~ 185° (horizontal - vertical - horiz Manual: approx. 0.065 °/s ~ 120 °/s, Preset: approx. 400 °/s ON / OFF 256 OFF, SEQ, SORT, AUTO PAN, PATR Standard Auto Track STOP / PLAY / LEARN ON / OFF 8 area titles, 16 characters/area ON / OFF Terminal input, VMD, Command alar Preset position 1 ~ 4, PATROL 1 ~ 4 AUTO PAN, B/W 1.0 V [p-p] / NZC composite 75 / BNC Connector Coaxial Multiplex System, RS485	m AUTO TRACK 1 ~ 4, SEQ, SORT, 1.0 V [p-p] / PAL composite 75 / BNC Connector
Alarm Input / Output	Panning Speed *1 Tilting Range Tilting Speed *1 Proportional Pan/Tilt Control Number of Preset Positions Auto Mode Auto Track Patrol Image Hold Digital Flip Area Title Preset Alarm Alarm Source Alarm Actions Video Output Controller Interface External I/O Terminals	Manual: approx. 0.065 °/s ~ 120 °/s, Preset: approx. 400 °/s -5° ~ 185° (horizontal - vertical - horiz Manual: approx. 0.066 °/s ~ 120 °/s, Preset: approx. 400 °/s ON / OFF 256 OFF, SEQ, SORT, AUTO PAN, PATR Standard Auto Track STOP / PLAY / LEARN ON / OFF 8 area titles, 16 characters/area ON / OFF 7 erminal input, VMD, Command alar Preset position 1 ~ 4, PATROL 1 ~ 4 AUTO PAN, B/W 1.0 V [p-p] / NTSC composite 75 / BNC Connector Coaxial Multiplex System, RS485 4 inputs (ALARM IN 1 ~ ALARM IN 4), 2	m AUTO TRACK 1 ~ 4, SEQ, SORT, 1.0 V [p-p] / PAL composite 75 / BNC Connector
Alarm Input / Output	Panning Speed *1 Tilting Range Tilting Speed *1 Proportional Pan/Tilt Control Number of Preset Positions Auto Mode Auto Track Patrol Image Hold Digital Flip Area Tile Preset Alarm Alarm Source Alarm Actions Video Output Controller Interface External I/O Terminals Setup Method	Manual: approx. 0.065 °/s ~ 120 °/s, Preset: approx. 400 °/s -5° ~ 185° (horizontal - vertical - horiz Manual: approx. 0.065 °/s ~ 120 °/s, Preset: approx. 400 °/s ON / OFF 256 OFF, SEQ, SORT, AUTO PAN, PATR Standard Auto Track STOP / PLAY / LEARN ON / OFF 0N / OFF 8 area titles, 16 characters/area ON / OFF 8 area titles, 16 characters/area ON / OFF 7 reminal input, VMD, Command alar Preset position 1 ~ 4, PATROL 1 ~ 4 AUTO PAN, B/W 1.0 V [p-p] / NTSC composite 75 / BNC Connector Coaxial Multiplex System, RS485 4 inputs (ALARM IN 1 ~ ALARM IN 4), 2 OSD setup menu	m AUTO TRACK 1 ~ 4, SEQ, SORT, 1.0 V [p-p] / PAL composite 75 / BNC Connector
Alarm Input /	Panning Speed *1 Tilting Range Tilting Speed *1 Proportional Pan/Tilt Control Number of Preset Positions Auto Mode Auto Track Patrol Image Hold Digital Flip Area Tile Preset Alarm Alarm Source Alarm Actions Video Output Controller Interface External I/O Terminals Setup Method Password Lock	Manual: approx. 0.065 °/s ~ 120 °/s, Preset: approx. 400 °/s -5° ~ 185° (horizontal - vertical - horiz Manual: approx. 0.065 °/s ~ 120 °/s, Preset: approx. 400 °/s ON / OFF 256 OFF, SEQ, SORT, AUTO PAN, PATR Standard Auto Track STOP / PLAY / LEARN ON / OFF ON / OFF 8 area titles, 16 characters/area ON / OFF Terminal input, VMD, Command alar Preset position 1 ~ 4, PATROL 1 ~ 4 AUTO PAN, B/W 1.0 V [p-p] / NTSC composite 75 / BNC Connector Coaxial Multiplex System, RS485 4 inputs (ALARM IN 1 ~ ALARM IN 4), 2 OSD setup menu All menus	m AUTO TRACK 1 ~ 4, SEQ, SORT, 1.0 V [p-p] / PAL composite 75 / BNC Connector 2 outputs (ALARM / AUX1, BW / AUX2)
Alarm Input / Output	Panning Speed *1 Tilting Range Tilting Speed *1 Proportional Pan/Tilt Control Number of Preset Positions Auto Mode Auto Track Patrol Image Hold Digital Flip Area Tile Preset Alarm Alarm Source Alarm Actions Video Output Controller Interface External I/O Terminals Setup Method	Manual: approx. 0.065 °/s ~ 120 °/s, Preset: approx. 400 °/s -5° ~ 185° (horizontal - vertical - horiz Manual: approx. 0.065 °/s ~ 120 °/s, Preset: approx. 400 °/s ON / OFF 256 OFF, SEQ, SORT, AUTO PAN, PATR Standard Auto Track STOP / PLAY / LEARN ON / OFF 0N / OFF 3 area titles, 16 characters/area ON / OFF Terminal input, VMD, Command alar Preset position 1 ~ 4, PATROL 1 ~ 4 AUTO PAN, B/W 1.0 V [p-p] / NTSC composite 75 / BNC Connector Coaxial Multiplex System, RS485 4 inputs (ALARM IN 1 ~ ALARM IN 4), 2 OSD setup menu All menus English, Russian, German, French, It	m AUTO TRACK 1 ~ 4, SEQ, SORT, 1.0 V [p-p] / PAL composite 75 / BNC Connector 2 outputs (ALARM / AUX1, BW / AUX2)
Alarm Input / Output	Panning Speed *1 Tilting Range Tilting Speed *1 Proportional Pan/Tilt Control Number of Preset Positions Auto Mode Auto Track Patrol Image Hold Digital Flip Area Tile Preset Alarm Alarm Source Alarm Actions Video Output Controller Interface External I/O Terminals Setup Method Password Lock	Manual: approx. 0.065 °/s ~ 120 °/s, Preset: approx. 400 °/s -5° ~ 185° (horizontal - vertical - horiz Manual: approx. 0.065 °/s ~ 120 °/s, Preset: approx. 400 °/s ON / OFF 256 OFF, SEQ, SORT, AUTO PAN, PATR Standard Auto Track STOP / PLAY / LEARN ON / OFF ON / OFF 8 area titles, 16 characters/area ON / OFF Terminal input, VMD, Command alar Preset position 1 ~ 4, PATROL 1 ~ 4 AUTO PAN, B/W 1.0 V [p-p] / NTSC composite 75 / BNC Connector Coaxial Multiplex System, RS485 4 inputs (ALARM IN 1 ~ ALARM IN 4), 2 OSD setup menu All menus	m AUTO TRACK 1 ~ 4, SEQ, SORT, 1.0 V [p-p] / PAL composite 75 / BNC Connector 2 outputs (ALARM / AUX1, BW / AUX2)
Alarm Input / Output	Panning Speed *1 Tilting Range Tilting Speed *1 Proportional Pan/Tilt Control Number of Preset Positions Auto Mode Auto Track Patrol Image Hold Digital Flip Area Tile Preset Alarm Alarm Source Alarm Actions Video Output Controller Interface External I/O Terminals Setup Method Password Lock	Manual: approx. 0.065 °/s ~ 120 °/s, Preset: approx. 400 °/s -5° ~ 185° (horizontal - vertical - horiz Manual: approx. 0.065 °/s ~ 120 °/s, Preset: approx. 400 °/s ON / OFF 256 OFF, SEQ, SORT, AUTO PAN, PATR Standard Auto Track STOP / PLAY / LEARN ON / OFF 0N / OFF 3 area titles, 16 characters/area ON / OFF Terminal input, VMD, Command alar Preset position 1 ~ 4, PATROL 1 ~ 4 AUTO PAN, B/W 1.0 V [p-p] / NTSC composite 75 / BNC Connector Coaxial Multiplex System, RS485 4 inputs (ALARM IN 1 ~ ALARM IN 4), 2 OSD setup menu All menus English, Russian, German, French, It	m AUTO TRACK 1 ~ 4, SEQ, SORT, 1.0 V [p-p] / PAL composite 75 / BNC Connector 2 outputs (ALARM / AUX1, BW / AUX2)
Alarm Input / Output	Panning Speed *1 Tilting Range Tilting Speed *1 Proportional Pan/Tilt Control Number of Preset Positions Auto Mode Auto Track Patrol Image Hold Digital Flip Area Title Preset Alarm Alarm Source Alarm Actions Video Output Controller Interface External I/O Terminals Setup Method Password Lock Language	Manual: approx. 0.065 °/s ~ 120 °/s, Preset: approx. 400 °/s -5° ~ 185° (horizontal - vertical - horiz Manual: approx. 0.066 °/s ~ 120 °/s, Preset: approx. 400 °/s ON / OFF 256 OFF, SEQ, SORT, AUTO PAN, PATR Standard Auto Track STOP / PLAY / LEARN ON / OFF 0N / OFF 8 area titles, 16 characters/area ON / OFF 7 erminal input, VMD, Command alar Preset position 1 ~ 4, PATROL 1 ~ 4 AUTO PAN, B/W 1.0 V [p-p] / NTSC composite 75 / BNC Connector Coaxial Multiplex System, RS485 4 inputs (ALARM IN 1 ~ ALARM IN 4), 2 OSD setup menu All menus English, Russian, German, French, It Chinese, Japanese	m AUTO TRACK 1 ~ 4, SEQ, SORT, 1.0 V [p-p] / PAL composite 75 / BNC Connector 2 outputs (ALARM / AUX1, BW / AUX2) alian, Spanish, Portuguese, CE (EN60065, EN55022 ClassB,
Alarm Input / Output	Panning Speed *1 Tilting Range Tilting Speed *1 Proportional Pan/Tilt Control Number of Preset Positions Auto Mode Auto Track Patrol Image Hold Digital Flip Area Title Preset Alarm Alarm Source Alarm Actions Video Output Controller Interface External I/O Terminals Setup Method Password Lock Language	Manual: approx. 0.065 °/s ~ 120 °/s, Preset: approx. 400 °/s -5° ~ 185° (horizontal - vertical - horiz Manual: approx. 0.065 °/s ~ 120 °/s, Preset: approx. 400 °/s ON / OFF 256 OFF, SEQ, SORT, AUTO PAN, PATR Standard Auto Track STOP / PLAY / LEARN ON / OFF 0 / OFF 8 area titles, 16 characters/area ON / OFF 8 area titles, 16 characters/area ON / OFF 7 erminal input, VMD, Command alar Preset position 1 ~ 4, PATROL 1 ~ 4 AUTO PAN, B/W 1.0 V [p-p] / NTSC composite 75 / BNC Connector Coaxial Multiplex System, RS485 4 inputs (ALARM IN 1 ~ ALARM IN 4), 2 OSD setup menu All menus English, Russian, German, French, It Chinese, Japanese UL (6500),FCC (Part15 ClassA),	m AUTO TRACK 1 ~ 4, SEQ, SORT, 1.0 V [p-p] / PAL composite 75 / BNC Connector 2 outputs (ALARM / AUX1, BW / AUX2) alian, Spanish, Portuguese, CE (EN60065, EN55022 ClassB, EN55024), GOST (GOST R 51558)
Alarm Input / Output	Panning Speed *1 Tilting Range Tilting Speed *1 Proportional Pan/Tilt Control Number of Preset Positions Auto Mode Auto Track Patrol Image Hold Digital Flip Area Tilte Preset Alarm Alarm Source Alarm Source Alarm Actions Video Output Controller Interface External I/O Terminals Setup Method Password Lock Language Safety/EMC Standard Power Source and	Manual: approx. 0.065 °/s ~ 120 °/s, Preset: approx. 400 °/s -5° ~ 185° (horizontal - vertical - horiz Manual: approx. 0.065 °/s ~ 120 °/s, Preset: approx. 400 °/s ON / OFF 256 OFF, SEQ, SORT, AUTO PAN, PATR Standard Auto Track STOP / PLAY / LEARN ON / OFF ON / OFF 8 area titles, 16 characters/area ON / OFF Terminal input, VMD, Command alar Preset position 1 ~ 4, PATROL 1 ~ 4 AUTO PAN, B/W 1.0 V [p-j] / NTSC composite 75 / BNC Connector Coaxial Multiplex System, RS485 4 inputs (ALARM IN 1 ~ ALARM IN 4), 2 OSD setup menu All menus English, Russian, German, French, It Chinese, Japanese UL (6500),FCC (Part15 ClassA), C-UL (E60065)	zontal) (According to the TILT ANGLE 8 steps, 16 steps, 64 steps, 10L, AUTO TRACK m , AUTO TRACK 1 ~ 4, SEQ, SORT, 1.0 V [p-p] / PAL composite 75 / BNC Connector 2 outputs (ALARM / AUX1, BW / AUX2) alian, Spanish, Portuguese, CE (EN60065, EN55022 ClassB, EN55024), GOST (GOST R 51558) WV-CS580: 220-240 V AC, 50Hz, 4.6V
Alarm Input / Output	Panning Speed *1 Tilting Range Tilting Speed *1 Proportional Pan/Tilt Control Number of Preset Positions Auto Mode Auto Track Patrol Image Hold Digital Flip Area Title Preset Alarm Alarm Source Alarm Actions Video Output Controller Interface External I/O Terminals Setup Method Password Lock Language Safety/EMC Standard Power Source and Power Consumption	Manual: approx. 0.065 °/s ~ 120 °/s, Preset: approx. 400 °/s -5° ~ 185° (horizontal - vertical - horiz Manual: approx. 0.066 °/s ~ 120 °/s, Preset: approx. 400 °/s ON / OFF 256 OFF, SEQ, SORT, AUTO PAN, PATR Standard Auto Track STOP / PLAY / LEARN ON / OFF 0N / OFF 8 area titles, 16 characters/area ON / OFF 7 arminal input, VMD, Command alar Preset position 1 ~ 4, PATROL 1 ~ 4 AUTO PAN, B/W 1.0 V [p-p] / NTSC composite 75 / BNC Connector Coaxial Multiplex System, RS485 4 inputs (ALARM IN 1 ~ ALARM IN 4), 2 OSD setup menu All menus English, Russian, German, French, It Chinese, Japanese UL (6500),FCC (Part15 ClassA), C-UL (E60065) 24 V AC, 60Hz, 4.3W	m AUTO TRACK 1 ~ 4, SEQ, SORT, 1.0 V [p-p] / PAL composite 75 / BNC Connector 2 outputs (ALARM / AUX1, BW / AUX2) alian, Spanish, Portuguese, CE (EN60065, EN55022 ClassB, EN55024), GOST (GOST R 51558)
Alarm Input / Output	Panning Speed *1 Tilting Range Tilting Speed *1 Proportional Pan/Tilt Control Number of Preset Positions Auto Mode Auto Mode Auto Track Patrol Image Hold Digital Flip Area Tile Preset Alarm Alarm Source Alarm Actions Video Output Controller Interface External I/O Terminals Setup Method Password Lock Language Safety/EMC Standard Power Source and Power Consumption Ambient Operating Temperature	Manual: approx. 0.065 °/s ~ 120 °/s, Preset: approx. 400 °/s -5° ~ 185° (horizontal - vertical - horiz Manual: approx. 0.065 °/s ~ 120 °/s, Preset: approx. 400 °/s ON / OFF 256 OFF, SEQ, SORT, AUTO PAN, PATR Standard Auto Track STOP / PLAY / LEARN ON / OFF 0N / OFF 8 area titles, 16 characters/area ON / OFF 8 area titles, 16 characters/area ON / OFF 10 V (DFF 7 erminal input, VMD, Command alar Preset position 1 ~ 4, PATROL 1 ~ 4 AUTO PAN, B/W 1.0 V [p-p] / NTSC composite 75 / BNC Connector Coaxial Multiplex System, RS485 4 inputs (ALARM IN 1 ~ ALARM IN 4), 2 OSD setup menu All menus English, Russian, German, French, It Chinese, Japanese UL (6500,FCC (Part15 ClassA), C-UL (E60065) 24 V AC, 60Hz, 4.3W	zontal) (According to the TILT ANGLE 8 steps, 16 steps, 64 steps, 10L, AUTO TRACK m , AUTO TRACK 1 ~ 4, SEQ, SORT, 1.0 V [p-p] / PAL composite 75 / BNC Connector 2 outputs (ALARM / AUX1, BW / AUX2) alian, Spanish, Portuguese, CE (EN60065, EN55022 ClassB, EN55024), GOST (GOST R 51558) WV-CS580: 220-240 V AC, 50Hz, 4.6W
Alarm Input / Output	Panning Speed *1 Tilting Range Tilting Speed *1 Proportional Pan/Tilt Control Number of Preset Positions Auto Mode Auto Track Patrol Image Hold Digital Flip Area Title Preset Alarm Alarm Source Alarm Actions Video Output Controller Interface External I/O Terminals Setup Method Password Lock Language Safety/EMC Standard Power Source and Power Consumption	Manual: approx. 0.065 °/s ~ 120 °/s, Preset: approx. 400 °/s -5° ~ 185° (horizontal - vertical - horiz Manual: approx. 0.066 °/s ~ 120 °/s, Preset: approx. 400 °/s ON / OFF 256 OFF, SEQ, SORT, AUTO PAN, PATR Standard Auto Track STOP / PLAY / LEARN ON / OFF 0N / OFF 8 area titles, 16 characters/area ON / OFF 7 arminal input, VMD, Command alar Preset position 1 ~ 4, PATROL 1 ~ 4 AUTO PAN, B/W 1.0 V [p-p] / NTSC composite 75 / BNC Connector Coaxial Multiplex System, RS485 4 inputs (ALARM IN 1 ~ ALARM IN 4), 2 OSD setup menu All menus English, Russian, German, French, It Chinese, Japanese UL (6500),FCC (Part15 ClassA), C-UL (E60065) 24 V AC, 60Hz, 4.3W	zontal) (According to the TILT ANGLE 8 steps, 16 steps, 64 steps, 10L, AUTO TRACK m , AUTO TRACK 1 ~ 4, SEQ, SORT, 1.0 V [p-p] / PAL composite 75 / BNC Connector 2 outputs (ALARM / AUX1, BW / AUX2) alian, Spanish, Portuguese, CE (EN60065, EN55022 ClassB, EN55024), GOST (GOST R 51558) WV-CS580: 220-240 V AC, 50Hz, 4.6W

Part Names and Functions

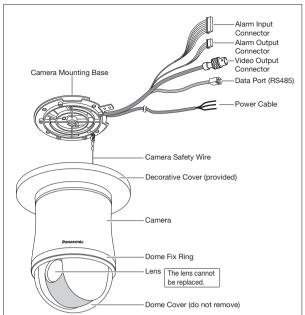



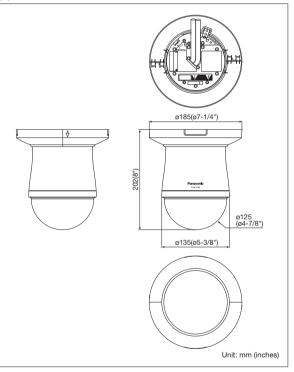

*1 Actual speed depends on type of controller being used. *2 When power is on continuously (however, the camera's interior temperature is -10 °C or higher)

Avoid installing this product in the following locations.

· Areas directly exposed to rain and water

- Near a swimming pool or other areas where chemicals are used
 Food preparation areas and other locations where there are large amounts of steam vapour and oil, in flammable atmospheres, other special environments
- Areas where radiation, X-rays, strong electric waves, or magnetism is generated
 At sea, in coastal areas, or in areas where corrosive gas is being generated

- Areas outside of the allowable ambient operating temperature range (-10 °C to +50 °C)
 In a motor vehicle, on a boat, or other areas subject to strong vibration (This camera is not designed for use in a vehicle.)
- Near an air conditioner outlet, near a door that opens up to the outdoors, or any other area subjected to temperature extremes (Such conditions can cause clouding and condensation formation on the dome cover,)at reside on the network. Important - Safety Precaution: carefully read the operating instructions and installation manual before using this product. Trademarks and registered trademarks
- Microsoft, and Windows are registered trademarks of Microsoft Corporation in the U.S. and other countries.
 "Super Dynamic", "SDII", "SDIII", "SD5", "SD5Link", "SD6", "i-PRO" and "i-PRO SmartHD" logos are trademarks or registered trademarks of Panasonic Corporation.

• All TV pictures are simulated. • Masses and dimensions are approximate. • Specifications are subject to change without notice. • These products may be subject to export control regulations.

that reside on the network.

DISTRIBUTED BY:

Panasonic

- Panasonic can not be responsible for network performance and/or other manufacturer products

http://panasonic.net/security/ Printed in Japan (2A-075CL)