



American Dynamics

A Tyco International Company

Discover 300 Series

600 TVL Box Camera



Features That Make a Difference:

- Eight privacy zones to conceal private areas
- Digital noise reduction corrects imperfections on an image
- Auto White Balance finds best settings for the clearest images
- Day/Night switching for low light conditions
- Eight programmable privacy zones
- 12VDC/24VAC and 230V (PAL)

The compact Discover 300 Series Box Camera provides high resolution images and accurate color rendition for budget-conscious customers. Easy to install and use, this camera is engineered for optimal performance and can be customized to fit a variety of environments with a mixture of lighting conditions.

Digital Signal Processing (DSP), combined with 600 TVL on a 1/3" Format Interline CCD sensor, delivers clear picture quality typically available only from more expensive models. This box camera offers backlight compensation (BLC), automatic gain control (AGC), and an auto iris lens to produce clear, accurate color images in challenging lighting conditions. Low light sensitivity renders sharp images in scenes as dim as 0.5 lux.

Configured using pre-defined or user-customized settings, Auto White Balance finds the best settings for optimal white balance to achieve the clearest images possible. The one-touch feature makes this one of the easiest cameras in the industry to adjust for manual white balance.

With up to eight privacy zones, you can configure the camera to conceal private areas in the camera's field of view.

The Discover 300 Series Box Camera is ideal for indoor commercial environments, and is commonly used with a weatherproof, vandal-resistant enclosure for outdoor applications such as for a building perimeter or parking garage.

Specifications

Operational

Imager 1/3" Format Interline CCD sensor
Horizontal Resolution 600 TVL
Active Pixel Count (H x V)
NTSC 768 x 494
PAL 752 x 582
Scanning Frequency 2:1 Interlace
Min. Scene Illumination 0.32 lux (50IRE, F=1.2, AGC max.)
Iris Control Video/DC auto
S/N Ratio 48 dB (100 IRE)
Synchronization Internal
Shutter Speed MES 1/60 (NTSC)/ MES 1/50 PAL, FLK,
1/250-1/100000, Auto (NTSC)

Controls

AGC Low, Middle, High, Off
AGC Dynamic Range 70 IRE-100 IRE
AES Auto luminance control 1/60-1/100000 sec.
max. (NTSC)
Auto luminance control 1/50-1/100000 sec.
max. (PAL)
BLC 2 Zone On, Off, HLC
White Balance Auto
Auto White Balance Range ATW1 (2700K-9700K),
ATW2 (2000K-20000K) AWC, Manual
D/N Control Auto, Color, B/W, Ext
Brightness 0-255 Level
Sharpness 0-31 Level
DWDR On, Off
Digital Noise Reduction On, Off
Privacy Zones Eight programmable
Mirror On, Off

On-screen Display On, Off
Back Focus CS Mount 12mm +/- 1.0mm

Connectors

Composite Video Output BNC
Mounting Hole 1/4 in top to bottom

Electrical

Voltage DC 12V ± 10% and AC 24V ± 20%; 230VAC (PAL)
Power 2.6W (max.)

Mechanical


Housing Material Aluminum
Housing Color White (RAL 9003, Pantone® 705)
Dimensions (W x H x L) 63 x 57 x 120.20 mm (2.48 x 2.24 x 4.73 in)
Weight (Without Lens) 200g (0.440 lbs)

Environmental


Operational Temperature -10°C to 50°C (14°F to 122°F)
Storage Temperature -20°C to 60°C (-4°F to 140°F)
Relative Humidity 90% non-condensing

Regulatory

Emissions FCC: Part 15, Class B; CE: EN61000, Class B
Immunity CE: EN50130-4
Safety NTSC: UL60950 and CSAC22.2 No. 60950
PAL: IEC60950

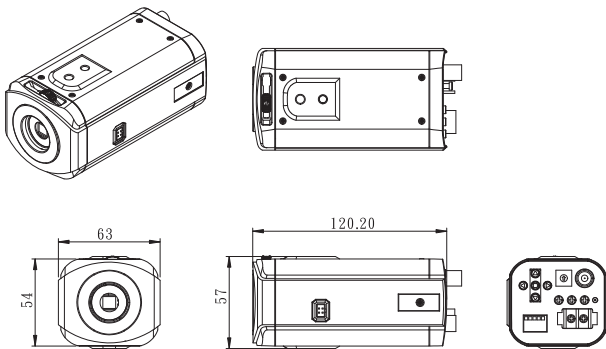

Dual Power Dimension

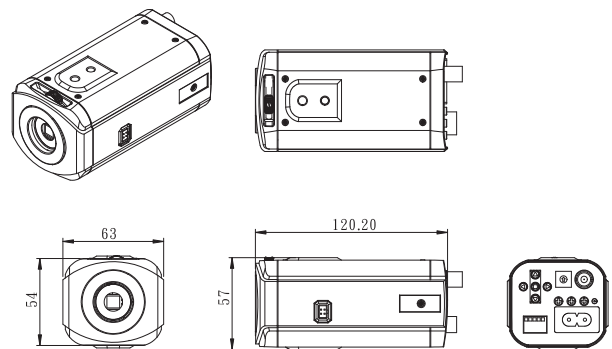

Main Power Dimensions (PAL Only)

Ordering Information

Brand	Camera	Series	Box	Format	230V (PAL only)
AD	CA	3	X	N = NTSC P = PAL	230

Accessories

Model	Description
6003-0239-01	North America Power Cord
6003-0240-01	European Power Cord
6003-0221-01	UK Power Cord

Related Products



ADTVR Series

HDVR

victor

Approvals



www.americandynamics.net

The trademarks, logos, and service marks displayed on this document are registered in the United States [or other countries]. Any misuse of the trademarks is strictly prohibited and Tyco International Ltd. will aggressively enforce its intellectual property rights to the fullest extent of the law, including pursuit of criminal prosecution wherever necessary. All trademarks not owned by Tyco International Ltd. are the property of their respective owners, and are used with permission or allowed under applicable laws.

Product offerings and specifications are subject to change without notice. Actual products may vary from photos. Not all products include all features. Availability varies by region; contact your sales representative.
©2012 Tyco Security Products. All rights reserved. AD0276-DS-201210-R01-A4-EN